

Blend

Refrigerated Self-Service Case w/ Rear Ambient Shelving

Structural Concepts®
DELIVERING FRESH. ALWAYS.™

• **NM4852RSSA**

47-3/4"L x 45-5/8"D x 52"H

Included

- 1 year parts & labor warranty, 5 year compressor warranty
- Compressor air intake from lower front panel, out top rear discharge vent
- LED top & shelf lights
- Warmest average product temperature of 40°F or less



NM4852RSSA

Specify	Standard Features	Additional Options
INTERIOR COLOR	• Powder coated Silversan Black	• Stainless steel
LOWER CLADDING COLOR	• Powder coated Silversan Black	• Laminate (stock/non-stock colors) • Powder coated (stock/non-stock colors) • Stainless steel
LOWER FRONT PANEL COLOR	• Powder coated Silversan Black	• Stainless steel
UPPER EXTERIOR COLOR	• Powder coated Silversan Black	• Powder coated (stock/non-stock colors) • Stainless steel
BASE	• Casters w/ levelers	
BUMPER FRONT	• None	• 1" Boston bumper (2 rows) (specify color)
END PANELS	• Angled glass end panel	
UPPER REAR OUTSIDE SHELF	• Adjustable metal shelves, non-lighted	
PRICE TAG MOLDING	• None	• Price tag molding (black)
SHELVING	• (2) Lighted solid shelves	
LIGHTS	• LED 3500K w/ frosted lens	• LED 4000K w/ frosted lens
NOSE LIGHTS	• None	• Nose light
ELECTRICAL CONNECTION	• 6' Straight blade power cord	• 6' Locking blade power cord
REFRIGERATION	• Breeze self-contained refrigeration	
MISCELLANEOUS		• 2 year parts & labor warranty, 5 year compressor warranty
ACCESSORIES		• Clean Sweep® coil cleaner (self-cont.)

Blend

Refrigerated Self-Service Case w/ Rear Ambient Shelving


Structural Concepts®

DELIVERING FRESH. ALWAYS.™

Intended Environment: Type II - Designed to operate in ambient conditions of 80°F and 55% relative humidity unless noted otherwise in system information below.


Zone	Intended Product To Be Displayed	Warmest Avg Prod Temp ° F
1	Packaged refrigerated products-Prechilled to Warmest Avg Prod Temp.	40

PLAN VIEW

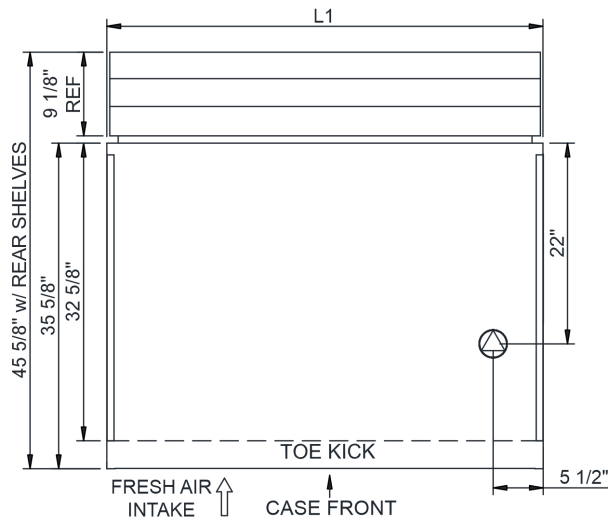

SELF-CONTAINED ACCESS ONLY BY PULLING OUT CONDENSER DRAWER

SIDE VIEW

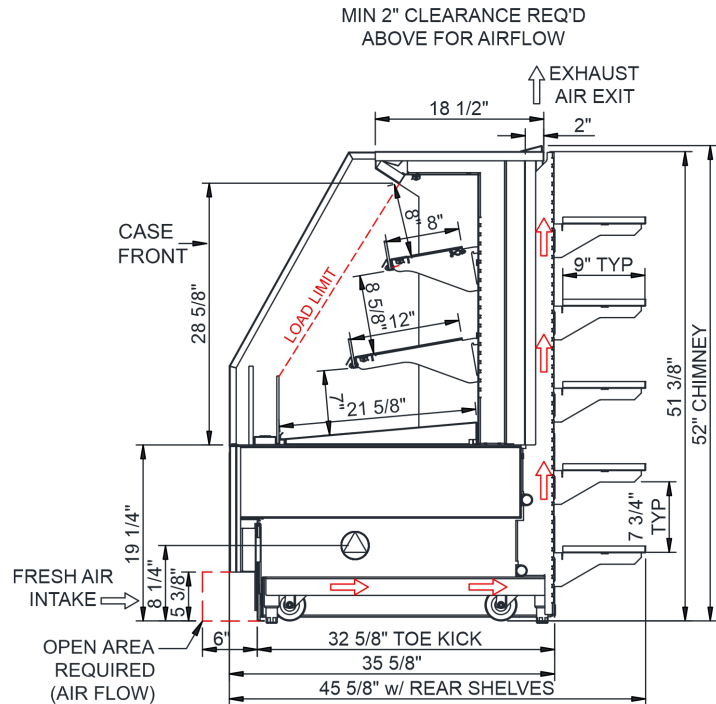

NOTE: ALL DIMENSIONS APPROXIMATE

- ELECTRICAL JUNCTION BOX**
(SUPPLIED WITH 6\"/>
- LOCATION OF DRAIN TUBE FOR REMOTE REF.**
ONLY (SUPPLIED WITH 3/4\"/>

- REFRIGERATION LINE CONNECTION.**
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.**

- SELF-CONTAINED CASE SERVICE ACCESS AREA.**
- DRY CASE SERVICE ACCESS AREA.**

Model Technical Specifications																
Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack BTU/H	Para. Rack BTU/H	Est Wt
NM4852RSSA	N/A	47.75	.00	Self-Contained (R290)	Circuit #1	110-120	1	60	15.65	1,544	2+G	5-20P or L5-20P	N/A	N/A	N/A	N/A

*** Does not include electric defrost on freezer models.

Regulatory Approvals:

All Models
 Accordance with AHRI Std 1200
 ETL Listed to UL 471 & UL 60335-2-89
 ETL Listed to CAN/CSA 22.2 No. 120
 ETL Sanitation to NSF/ANSI 7



In Accordance with
AHRI Std 1200

DOE 2017
Energy Efficiency
Compliant

Important Notes:

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) Remove tool free front panel to fit through 36" door.
- 3) Back side of counter must be open or vented the full length of the unit to allow proper ventilation for the refrigeration system.
- 4) Glass warranty only applicable to first point of delivery.

⚠ WARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.