

Oasis

Refrigerated End Cap Self-Contained

Structural Concepts®

DELIVERING FRESH. ALWAYS.™

• P7E52R

88-1/4"L x 30-3/8"D x 51-7/8"H

Included

- Breeze self-contained refrigeration
- Compressor air intake from lower front panel, out top rear discharge vent
- Hydrocarbon refrigerant (R290)
- LED top & shelf lights
- One year parts & labor; 5 year compressor warranty
- Open reach-in front
- Warmest average product temperature of 40°F or less



P7E52R



Specify	Standard Features	Additional Options
EXTERIOR COLOR	• Powder coated Silversan Black	• Laminate (stock/non-stock colors) • Powder coated (stock/non-stock colors) • Stainless steel
INTERIOR COLOR	• Powder coated Silversan Black	• Designer white • Stainless steel
LOWER FRONT PANEL COLOR	• Powder coated Silversan Black	• Powder coated (stock/non-stock colors) • Stainless steel (must choose stainless exterior)
BASE	• Casters w/ levelers	• Casters (non-locking) w/ seismic levelers
BUMPER FRONT	• None	• 1" Boston bumper (2 rows) (specify color)
PRICE TAG MOLDING	• None	• 1" Price tag molding (black)
SHELVING	• Metal shelves, non-lighted	• Metal shelves, lighted (LED)
LIGHTS	• LED 4000K w/ frosted lens	• LED 3500K w/ frosted lens
ELECTRICAL CONNECTION	• 6' Straight blade power cord	• 6' Locking blade power cord
REFRIGERATION	• Breeze self-contained refrigeration (front pull-out)	
MISCELLANEOUS		• 2 year parts & labor warranty, 5 year compressor warranty
ACCESSORIES		• Clean Sweep® condenser coil cleaner

Intended Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.

Zone	Intended Product To Be Displayed	Warmest Avg Prod Temp ° F
1	Packaged refrigerated products-Prechilled to Warmest Avg Prod Temp.	40

PLAN VIEW

SIDE VIEW

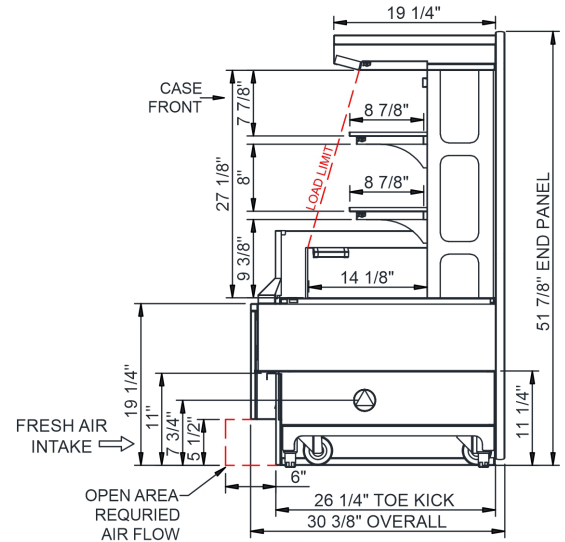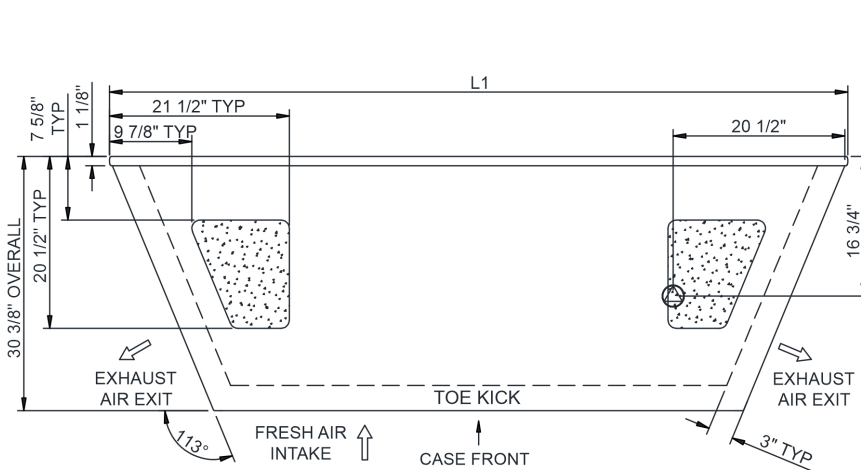

NOTE: ALL DIMENSIONS APPROXIMATE

- ELECTRICAL JUNCTION BOX**
(SUPPLIED WITH 6\"/>
- LOCATION OF DRAIN TUBE FOR REMOTE REF.**
ONLY (SUPPLIED WITH 3/4\"/>

- REFRIGERATION LINE CONNECTION.**
- REMOTE FLOOR SINK & UTILITIES**
ACCESS AREA.

- SELF-CONTAINED CASE SERVICE ACCESS AREA.**
- DRY CASE SERVICE ACCESS AREA.**

Model Technical Specifications														
Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack BTUH
P7E52R	N/A	88.25	.00	Self-Contained (R290)	Circuit #1	208-240	1	60	14.14	2,790	2+G	6-20P or L6-20P	N/A	N/A
														Para. Rack BTUH
														Est Wt
														N/A

*** Does not include electric defrost on freezer models.

Regulatory Approvals:

All Models
 Accordance with AHRI Std 1200
 ETL Listed to UL 471 & UL 60335-2-89
 ETL Listed to CAN/CSA 22.2 No. 120
 ETL Sanitation to NSF/ANSI 7



In Accordance with
AHRI Std 1200

DOE 2017
 Energy Efficiency
 Compliant

Important Notes:

⚠ WARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.