

Oasis

Refrigerated Self-Service Case With Tilting Deck

Structural Concepts®

DELIVERING FRESH. ALWAYS.™

- **PD452R** 50-1/4"L x 44"D x 51-7/8"H
- **PD852R** 98-1/4"L x 44"D x 51-7/8"H

Included

- Breeze self-contained refrigeration
- Compressor air intake from lower front panel, out top rear discharge vent
- Hydrocarbon refrigerant (R290)
- LED top & shelf lights
- One year parts & labor; 5 year compressor warranty
- Open reach-in front
- Solid back panel, galvanized
- Warmest average product temperature of 40°F or less




PD852R

Specify	Standard Features	Additional Options
EXTERIOR COLOR	• Powder coated Silversan Black	• Laminate (stock/non-stock colors) • Powder coated (stock/non-stock colors) • Stainless steel
INTERIOR COLOR	• Powder coated Silversan Black	• Designer white • Stainless steel
LOWER FRONT PANEL COLOR	• Powder coated Silversan Black	• Powder coated (stock/non-stock colors) • Stainless steel (must choose stainless exterior)
BASE	• Casters w/ levelers	• Casters (non-locking) w/ seismic levelers
BUMPER END	• None	• 1" Boston bumper (3 rows) (specify color)
BUMPER FRONT	• None	• 1" Boston bumper (2 rows) (specify color)
END PANELS	• Full w/stainless steel interior	• None (synchronized defrost required)
PRICE TAG MOLDING	• None	• 1" Price tag molding (black or silver)
SHELVING	• Metal shelves, non-lighted	• Acrylic product dividers • Bruise Buster mats per shelf • Metal shelves, lighted (LED)
LIGHTS	• LED 4000K w/ frosted lens	• LED 3500K w/ frosted lens
NOSE LIGHTS	• None	• LED nose light
ELECTRICAL CONNECTION	• 6' Straight blade power cord	• 6' Locking blade power cord
REFRIGERATION	• Breeze self-contained refrigeration	
MISCELLANEOUS		• 2 year parts & labor warranty, 5 year compressor warranty
ACCESSORIES		• Clean Sweep® coil cleaner (self-cont.)

Intended Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.

Zone	Intended Product To Be Displayed	Warmest Avg Prod Temp ° F
1	Packaged refrigerated products-Prechilled to Warmest Avg Prod Temp.	40

PLAN VIEW

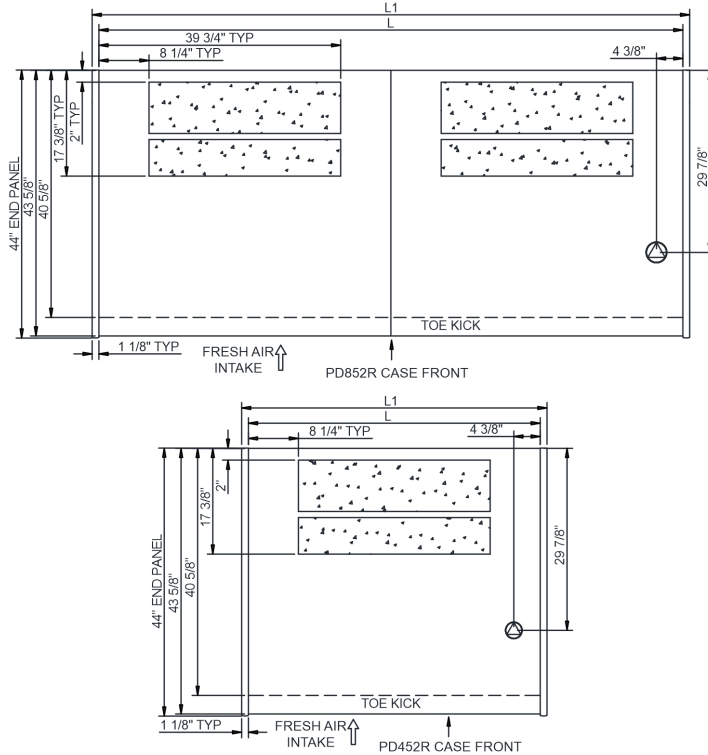


SIDE VIEW

	SHELF LENGTH
PD452R	47 3/8" X QTY 2
PD852R	47 3/8" X QTY 4

NOTE:

1. DISPLAY SHELVES 3 POSITIONS:
HORIZONTAL, 10° & 20°
2. DISPLAY DECK 2 POSITIONS:
HORIZONTAL & 10°

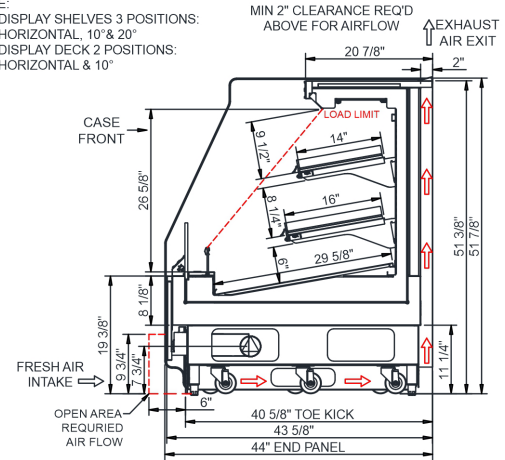

NOTE: ALL DIMENSIONS APPROXIMATE

- ELECTRICAL JUNCTION BOX**
(SUPPLIED WITH 6" LEADS OR POWER CORD).
- LOCATION OF DRAIN TUBE FOR REMOTE REF.**
ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

- REFRIGERATION LINE CONNECTION.**
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.**

- SELF-CONTAINED CASE SERVICE ACCESS AREA.**
- DRY CASE SERVICE ACCESS AREA.**

Model Technical Specifications

Model Technical Specifications																
Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack BTU/H	Para. Rack BTU/H	Est Wt
PD452R	48.00	50.25	.00	Self-Contained (R290)	Circuit #1	110-120	1	60	13.38	1,480	2+G	5-20P or L5-20P	N/A	N/A	N/A	N/A
PD852R	96.00	98.25	.00	Self-Contained (R290)	Circuit #1	208-240	1	60	14.57	2,630	2+G	6-20P or L6-20P	N/A	N/A	N/A	N/A

*** Does not include electric defrost on freezer models.

Regulatory Approvals:

All Models
 Accordance with AHRI Std 1200
 ETL Listed to UL 471 & UL 60335-2-89
 ETL Listed to CAN/CSA 22.2 No. 120
 ETL Sanitation to NSF/ANSI 7

Important Notes:

⚠ WARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.



In Accordance with
AHRI Std 1200

DOE 2017
Energy Efficiency
Compliant