

Technical Information

Fusion - GCD Hot Over Hot Combination Case

Structural Concepts®

DELIVERING FRESH. ALWAYS.™

DIMENSIONS / SHIPPING

Model	L"	L1"	L2"	Est Wt (lbs)
GCD656HHLB	73.125	75.375	0.000	N/A
GCD856HHLB	97.500	99.750	0.000	N/A

ELECTRICAL

Model	System Circuit Volts			Ph	Frq	Rated Load Amps	Min Cir Amps	Max OCP Amps	Watts	Wires	NEMA Plug	Amps Lights	Amps Fans	Amps Anti-Sweats	Amps Misc/Refrig/Heat
GCD656HHLB	Heat (N/A)	Circuit #1	208	1	60	21.95	30	30	4,501	2+G	Leads Multiple	0.71	N/A	9.44	11.80
	Heat (N/A)	Circuit #1	240	1	60	25.28	40	40	5,967	2+G	Leads Multiple	0.71	N/A	10.92	13.65
	Heat (N/A)	Circuit #1	208	3	60	16.60	30	30	4,501	3+G	Leads Multiple	0.71	N/A	9.44	11.80
	Heat (N/A)	Circuit #1	240	3	60	19.08	30	30	5,967	3+G	Leads Multiple	0.71	N/A	10.92	13.65
GCD856HHLB	Heat (N/A)	Circuit #1	208	1	60	36.21	50	50	7,628	2+G	Leads Multiple	0.86	N/A	N/A	35.35
	Heat (N/A)	Circuit #1	240	1	60	41.71	60	60	10,070	2+G	Leads Multiple	0.86	N/A	N/A	40.85
	Heat (N/A)	Circuit #1	208	3	60	27.86	40	40	7,628	3+G	Leads Multiple	0.86	N/A	N/A	35.35
	Heat (N/A)	Circuit #1	240	3	60	32.17	50	50	10,070	3+G	Leads Multiple	0.86	N/A	N/A	40.85

REFRIGERATION

Model	Zone	Section	System	Envt	REMOTE REFRIGERATION					GLYCOL / R744 REFRIGERATION			
					SST (°F)	Conv. Rack BTUH	Para. Rack BTUH	Defrost Interval (Hrs)	Defrost Duration	Total GPM	Pressure Drop (psi)	Concent (%)	Liquid Temp (°F)

INTENDED ENVIRONMENT

Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise under Envt above.

WARMEST AVERAGE PRODUCT TEMP & INTENDED USE OF ZONES

Zone	Temp (°F)	Intended Use
1	160	Packaged heated product
2	160	Unpackaged heated product

REGULATORY

All Models	ETL Listed to UL 197 ETL Listed to CAN/CSA 22.2 No. 109 ETL Sanitation to NSF/ANSI 4
------------	--



IMPORTANT NOTES




- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle.
- 2) 52" minimum door entry clearance required (without shipping skid).
- 3) Units must be shimmed during installation to ensure the unit is level and plumb.

Technical Information

Fusion - GCD Hot Over Hot Combination Case

Structural Concepts®

DELIVERING FRESH. ALWAYS.™

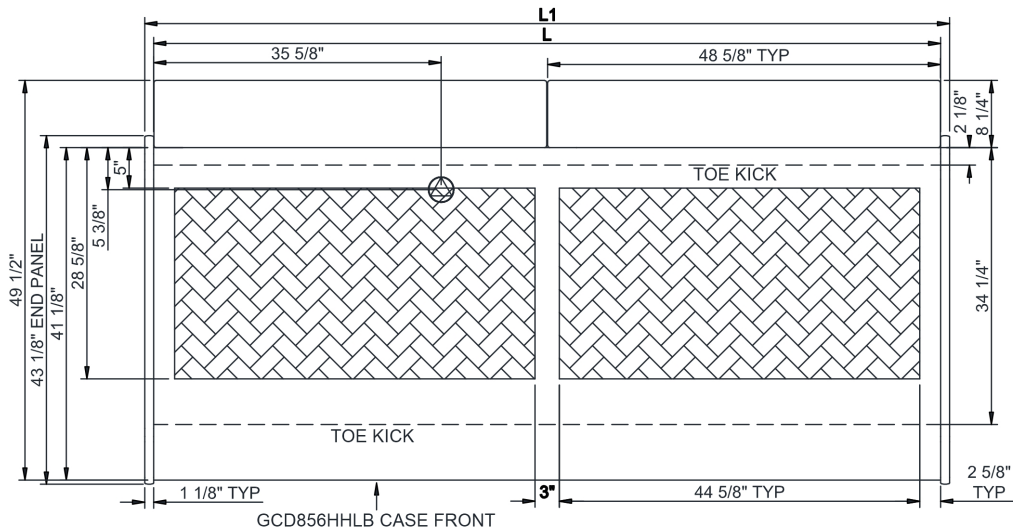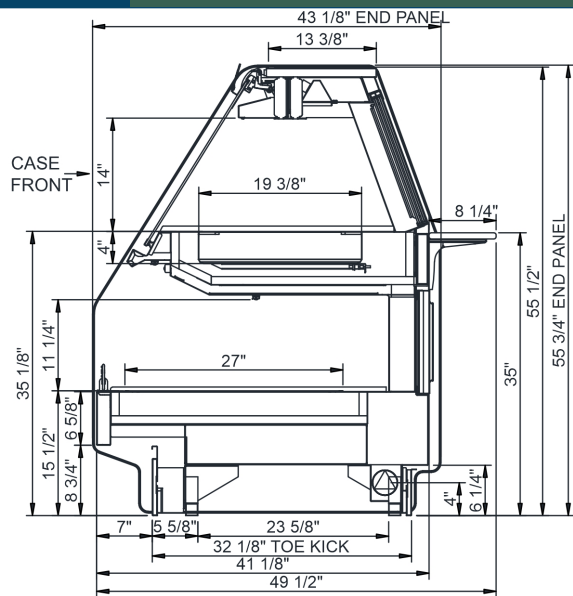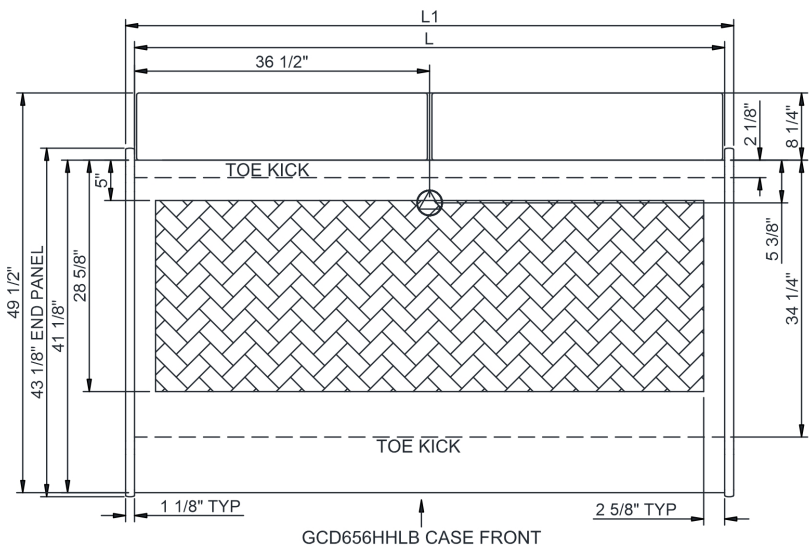

NOTE: ALL DIMENSIONS APPROXIMATE

- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
- LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

- REFRIGERATION LINE CONNECTION.
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

- SELF-CONTAINED CASE SERVICE ACCESS AREA.
- DRY CASE SERVICE ACCESS AREA.