

Technical Information

Fusion - GCD Hot Over Hot Combination Case

Structural Concepts®

DELIVERING FRESH. ALWAYS.™

DIMENSIONS / SHIPPING				
Model	L"	L1"	L2"	Est Wt (lbs)
GCD656HHLB	73.125	75.375	0.000	1,375
GCD856HHLB	97.500	99.750	0.000	1,400

ELECTRICAL															
Model	System Circuit Volts			Ph	Frq	Rated Load Amps	Min Cir Amps	Max OCP Amps	Watts	Wires	NEMA Plug	Amps Lights	Amps Fans	Amps Anti-Sweats	Amps Misc/Refrig/Heat
GCD656HHLB	Heat (N/A)	Circuit #1	208	1	60	21.95	30	30	4,501	2+G	Leads Multiple	0.71	N/A	9.44	11.80
	Heat (N/A)	Circuit #1	240	1	60	25.28	40	40	5,967	2+G	Leads Multiple	0.71	N/A	10.92	13.65
	Heat (N/A)	Circuit #1	208	3	60	16.60	30	30	4,501	3+G	Leads Multiple	0.71	N/A	9.44	11.80
	Heat (N/A)	Circuit #1	240	3	60	19.08	30	30	5,967	3+G	Leads Multiple	0.71	N/A	10.92	13.65
GCD856HHLB	Heat (N/A)	Circuit #1	208	1	60	36.21	50	50	7,628	2+G	Leads Multiple	0.86	N/A	N/A	35.35
	Heat (N/A)	Circuit #1	240	1	60	41.71	60	60	10,070	2+G	Leads Multiple	0.86	N/A	N/A	40.85
	Heat (N/A)	Circuit #1	208	3	60	27.86	40	40	7,628	3+G	Leads Multiple	0.86	N/A	N/A	35.35
	Heat (N/A)	Circuit #1	240	3	60	32.17	50	50	10,070	3+G	Leads Multiple	0.86	N/A	N/A	40.85

REFRIGERATION														
Model	Zone	Section	System	Envt	REMOTE REFRIGERATION					GLYCOL / R744 REFRIGERATION				
					SST (°F)	Conv. Rack BTUH	Para. Rack BTUH	Defrost Interval (Hrs)	Defrost Duration	Total GPM	Pressure Drop (psi)	Concent (%)	Liquid Temp (°F)	

INTENDED ENVIRONMENT		
WARMEST AVERAGE PRODUCT TEMP & INTENDED USE OF ZONES		
Zone	Temp (°F)	Intended Use
1	160	Packaged heated product
2	160	Unpackaged heated product

IMPORTANT NOTES
1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle.
2) 52" minimum door entry clearance required (without shipping skid).
3) Units must be shimmed during installation to ensure the unit is level and plumb.

REGULATORY	
All Models	ETL Listed to UL 197 ETL Listed to CAN/CSA 22.2 No. 109 ETL Sanitation to NSF/ANSI 4




Technical Information

Fusion - GCD Hot Over Hot Combination Case

Structural Concepts®

DELIVERING FRESH. ALWAYS.™

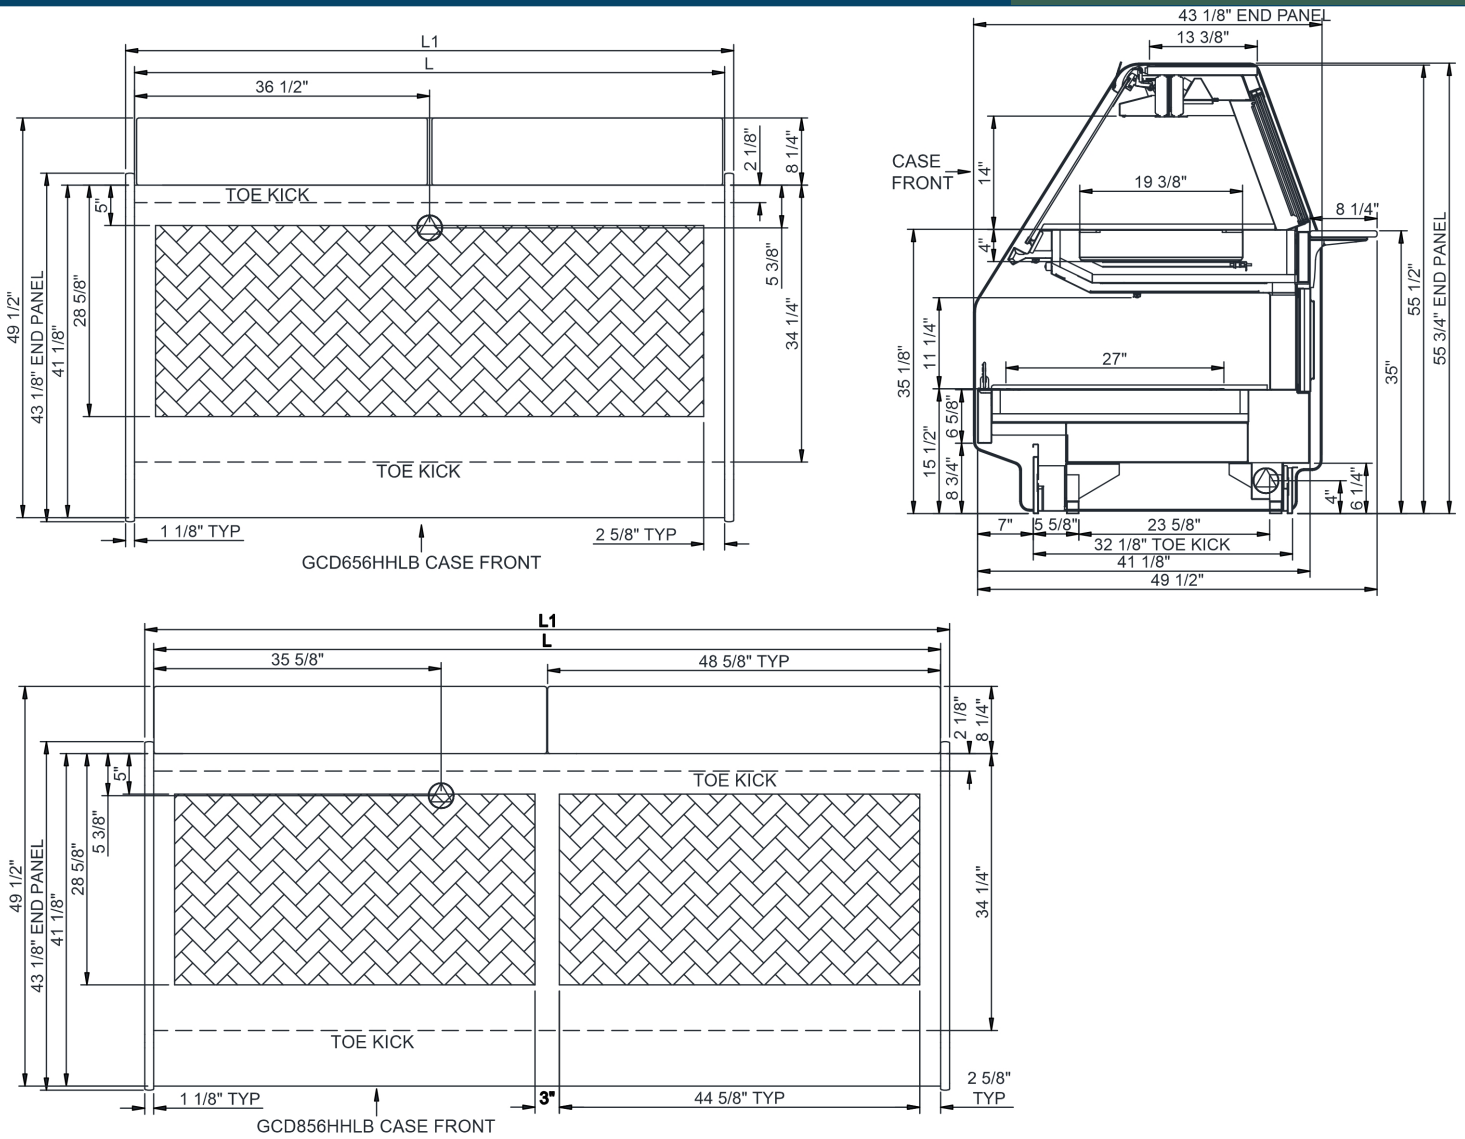

NOTE: ALL DIMENSIONS APPROXIMATE

-  ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).

 LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).
-  REFRIGERATION LINE CONNECTION.

 REMOTE FLOOR SINK & UTILITIES ACCESS AREA.
-  SELF-CONTAINED CASE SERVICE ACCESS AREA.

 DRY CASE SERVICE ACCESS AREA.