

Fusion

GHSSV 56"H Refrigerated Self-Service Case


Structural Concepts®

DELIVERING FRESH. ALWAYS.™

- **GHSSV456RLB** 51"L x 43"D x 55-5/8"H
- **GHSSV556RLB** 62-7/8"L x 43"D x 55-5/8"H
- **GHSSV656RLB** 75-3/8"L x 43"D x 55-5/8"H
- **GHSSV856RLB** 99-3/4"L x 43"D x 55-5/8"H
- **GHSSV1256RLB** 148-1/2"L x 43"D x 55-5/8"H

Included

- Remote DX refrigeration
- LED top & shelf lights
- One year parts & labor warranty
- Stainless steel rear exterior
- Warmest average product temperature of 40°F or less

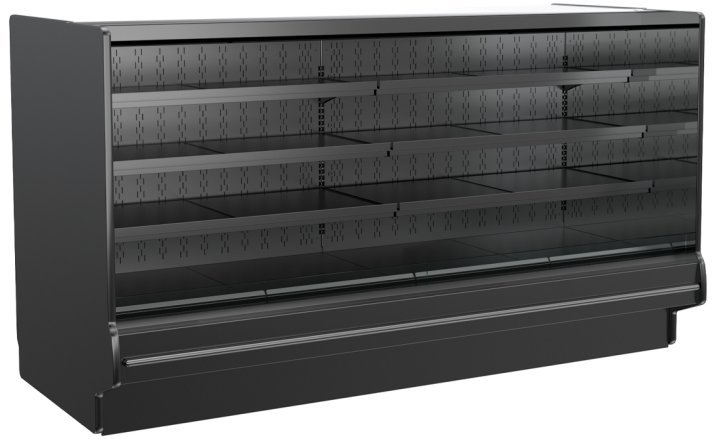

GHSSV856RLB


Specify	Standard Features	Additional Options
EXTERIOR COLOR	• Laminate (stock colors)	• Laminate (non-stock colors) • Powder coated (stock/non-stock colors) • Powder coated Silversan Black • Stainless steel
INTERIOR COLOR	• Powder coated Silversan Black	• Stainless steel
LOWER FRONT PANEL COLOR	• Powder coated Silversan Black	• Powder coated (stock/non-stock colors) • Stainless steel
BASE SUPPORT	• Rail system for shims	
BUMPER FRONT	• 1" Boston bumper (specify color)	• 1" Stainless steel plate rail bumper
END PANELS	• Full w/stainless steel mirror interior	• Cutaway w/glass • None (specify per line-up)
PRICE TAG MOLDING	• None	• 1" Price tag molding (black or silver) • Universal price tag molding (clear w/ open top)
REAR DOORS	• None (solid back panel)	• Solid rear swinging door(s) w/lock
SHELVING	• 18" & 22" & 24" Solid shelving	• 18" & 20" & 22" & 24" Glass shelving • 18" & 20" & 22" & 24" Solid shelving • 18" & 22" & 24" Glass shelving
LIGHTS	• LED 3500K w/ frosted lens	• LED 4000K w/ frosted lens
ELECTRICAL CONNECTION	• Electrical leads (remote)	
REFRIGERATION	¹ • Remote DX refrigeration	¹ • Remote w/thermostat, solenoid & TXV
SENSOR	• None	• CPC discharge air sensor (remote)
ACCESSORIES		• Drain strainer • Night curtain, retractable, non-locking

Std Notes: 1 - Read important notes for remote options


Option Notes: 1 - Read important notes for remote options

Intended Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.		
Zone	Intended Product To Be Displayed	Warmest Avg Prod Temp ° F
1	Packaged refrigerated products-Prechilled to Warmest Avg Prod Temp.	40

PLAN VIEW

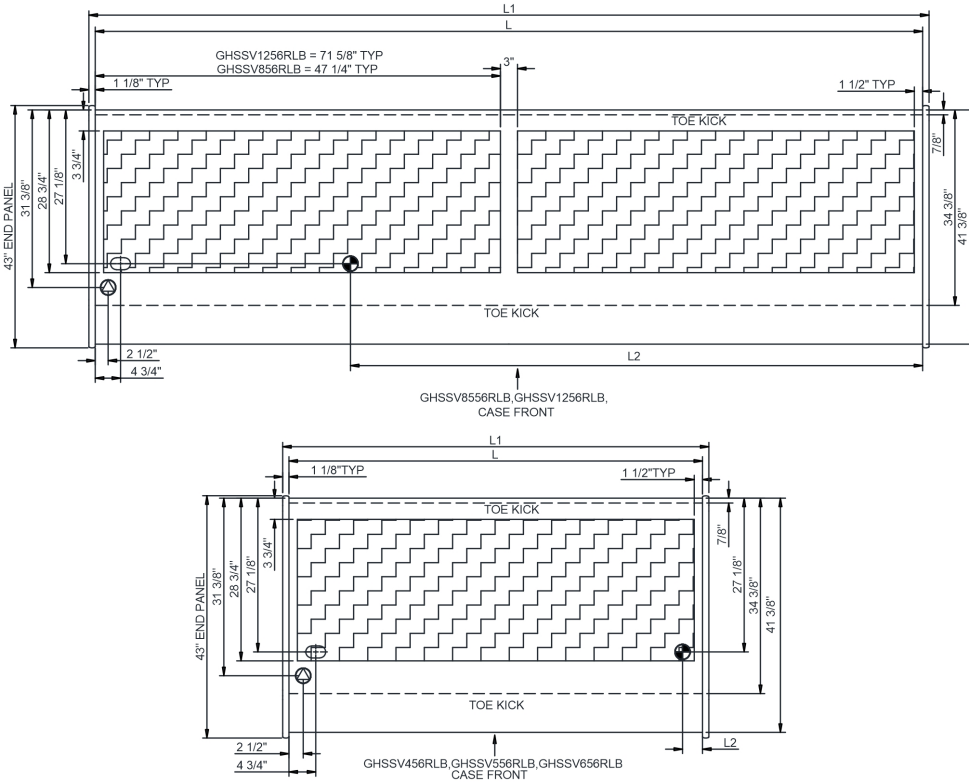

SIDE VIEW

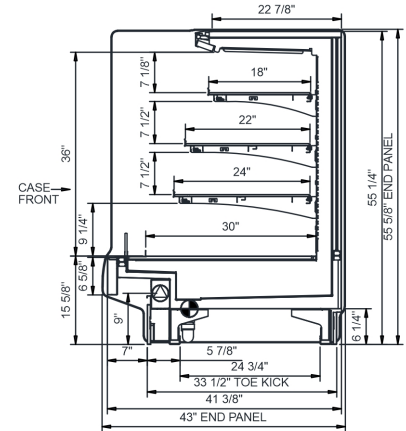

NOTE: ALL DIMENSIONS APPROXIMATE

- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6\"/>
- REFRIGERATION LINE CONNECTION.
- SELF-CONTAINED CASE SERVICE ACCESS AREA.
- LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4\"/>
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.
- DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications																
Model	L"	L1"	L2"	System Circuit Volts		Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack BTUH	Para. Rack BTUH	Est Wt	
				Remote (DX)	Circuit #1											
GHSSV456RLB	48.75	51.00	3.50	Remote (DX)	Circuit #1	110-120	1	60	1.48	88	2+G	Leads Multiple	20.00	4320	4000	650
				Remote (R744 TRANSCRIT)	Circuit #1	110-120	1	60	2.83	61	2+G	Leads Multiple		4320	4000	
GHSSV556RLB	60.63	62.88	3.50	Remote (DX)	Circuit #1	110-120	1	60	2.62	218	2+G	Leads Multiple	24.00	7646	7080	875
				Remote (R744 TRANSCRIT)	Circuit #1	110-120	1	60	3.29	149	2+G	Leads Multiple		7646	7080	
GHSSV656RLB	73.13	75.38	3.50	Remote (DX)	Circuit #1	110-120	1	60	2.70	192	2+G	Leads Multiple	20.00	8165	7560	1,075
				Remote (GLYCOL 35%)	Circuit #1	110-120	1	60	2.62	182	2+G	Leads Multiple	20.00	8165	7560	
GHSSV856RLB	97.50	99.75	3.50	Remote (DX)	Circuit #1	110-120	1	60	3.66	210	2+G	Leads Multiple	20.00	10454	9680	1,375
				Remote (GLYCOL 35%)	Circuit #1	110-120	1	60	3.75	162	2+G	Leads Multiple	-	10454	9680	
GHSSV1256RLB	146.25	148.50	101.13	Remote (DX)	Circuit #1	110-120	1	60	4.45	315	2+G	Leads Multiple	20.00	14515	13440	2,500
				Remote (GLYCOL 35%)	Circuit #1	110-120	1	60	5.21	432	2+G	Leads Multiple	20.00	14515	13440	

*** Does not include electric defrost on freezer models.

Regulatory Approvals:

All Models
 Accordance with AHRI Std 1200
 ETL Listed to UL 471
 ETL Listed to CAN/CSA 22.2 No. 120
 ETL Sanitation to NSF/ANSI 7



In Accordance with
AHRI Std 1200

DOE 2017
 Energy Efficiency
 Compliant

Important Notes:

- 1) REMOTE REFRIGERATION NOTE: Condensing unit not included, floor drain required.
- 2) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle.
- 3) 45" minimum door entry clearance required (without shipping skid).
- 4) Units must be shimmed during installation to ensure the unit is level and plumb.

⚠ WARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.