

Fusion

GHSSCD 37"H Refrigerated Combination Case

Structural Concepts®

DELIVERING FRESH. ALWAYS.™

(Lengths do not include 1-1/8" end panels)

- **GHSSCD436RLB** 48-3/4"L x 59-1/4"D x 37-5/8"H
- **GHSSCD536RLB** 60-5/8"L x 59-1/4"D x 37-5/8"H
- **GHSSCD636RLB** 73-1/8"L x 59-1/4"D x 37-5/8"H
- **GHSSCD836RLB** 97-1/2"L x 59-1/4"D x 37-5/8"H
- **GHSSCD1236RLB** 146-1/4"L x 59-1/4"D x 37-5/8"H

Included

- 16" Solid shelf
- Integrated average product temperature of 40°F or less
- LED top & shelf lights
- One year parts & labor warranty
- Remote DX refrigeration
- Stainless steel rear exterior



GHSSCD836RLB

Specify	Standard Features	Additional Options
EXTERIOR COLOR	<ul style="list-style-type: none"> Laminate (stock colors) 	<ul style="list-style-type: none"> Laminate (non-stock colors) Powder coated (stock/non-stock colors) Powder coated Silversan Black Stainless steel
INTERIOR COLOR	<ul style="list-style-type: none"> Powder coated Silversan Black 	<ul style="list-style-type: none"> Stainless steel
LOWER FRONT PANEL COLOR	<ul style="list-style-type: none"> Powder coated Silversan Black 	<ul style="list-style-type: none"> Powder coated (stock/non-stock colors) Stainless steel
BASE SUPPORT	<ul style="list-style-type: none"> Rail system for shims 	
BUMPER FRONT	<ul style="list-style-type: none"> 1" Boston bumper (specify color) 	<ul style="list-style-type: none"> 1" Stainless steel plate rail bumper
END PANELS	<ul style="list-style-type: none"> Full w/stainless steel mirror interior 	<ul style="list-style-type: none"> Cutaway w/glass None (specify per line-up)
REAR STORAGE	<ul style="list-style-type: none"> Non-refrigerated rear storage w/ sliding doors 	<ul style="list-style-type: none"> Non-refrigerated cake decorator storage Refrigerated rear storage w/ sliding doors
WORK SURFACE	<ul style="list-style-type: none"> Stainless steel 	
PRICE TAG MOLDING	<ul style="list-style-type: none"> None 	<ul style="list-style-type: none"> 1" Price tag molding (black or silver) Universal price tag molding (clear w/ open top)
SNEEZE GUARD	<ul style="list-style-type: none"> Clear glass w/ stainless steel ADM posts 	
LIGHTS	<ul style="list-style-type: none"> LED 3500K w/ frosted lens 	<ul style="list-style-type: none"> LED 4000K w/ frosted lens
ELECTRICAL CONNECTION	<ul style="list-style-type: none"> Electrical leads (remote) 	
REFRIGERATION	<ul style="list-style-type: none"> Remote DX refrigeration 	<ul style="list-style-type: none"> Remote w/thermostat, solenoid & TXV
SENSOR	<ul style="list-style-type: none"> None 	<ul style="list-style-type: none"> CPC discharge air sensor (remote)
ACCESSORIES		<ul style="list-style-type: none"> Night curtain, retractable, non-locking Removable wire security cover, locking

Fusion

GHSSCD 37"H Refrigerated Combination Case


Structural Concepts®

DELIVERING FRESH. ALWAYS.™


Intended Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.

Zone	Intended Product To Be Displayed	Warmest Avg Prod Temp ° F
1	Packaged refrigerated products	40

PLAN VIEW

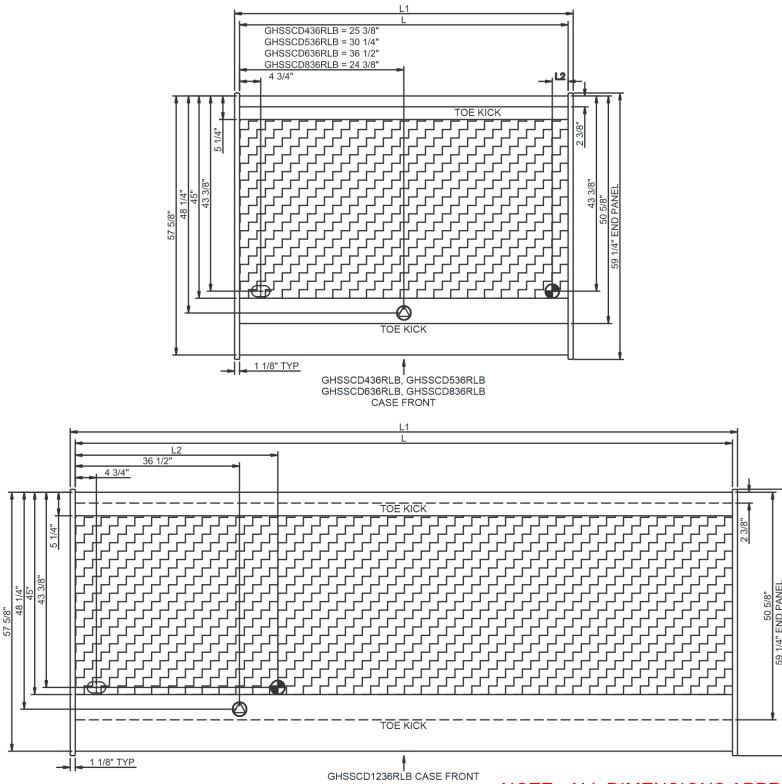

SIDE VIEW

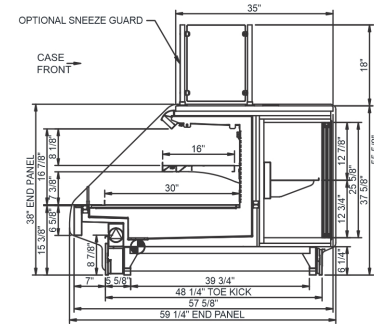

NOTE: ALL DIMENSIONS APPROXIMATE

- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6\"/>
- LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4\"/>

- REFRIGERATION LINE CONNECTION.
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

- SELF-CONTAINED CASE SERVICE ACCESS AREA.
- DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications

Model Technical Specifications																
Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack RTU _{UH}	Para. Rack RTU _{UH}	Est W _t
GHSSCD436RLB	48.75	51.00	3.50	Remote (DX)	Circuit #1	110-120	1	60	1.19	62	2+G	Leads Multiple	20.00	3110	2880	500
GHSSCD536RLB	60.63	62.88	3.50	Remote (DX)	Circuit #1	110-120	1	60	1.55	93	2+G	Leads Multiple	20.00	3499	3240	600
GHSSCD636RLB	73.13	75.38	3.50	Remote (R404A)	Circuit #1	110-120	1	60	1.61	105	2+G	Leads Multiple	20.00	3888	3600	700
GHSSCD836RLB	97.50	99.75	3.50	Remote (DX)	Circuit #1	110-120	1	60	1.68	123	2+G	Leads Multiple	20.00	5832	5400	950
GHSSCD1236RLB	146.25	148.50	45.13	Remote (DX)	Circuit #1	110-120	1	60	2.18	186	2+G	Leads Multiple	24.00	7906	7320	1,400

*** Does not include electric defrost on freezer models.

Regulatory Approvals:

All Models
 Accordance with AHRI Std 1200
 ETL Listed to UL 471
 ETL Listed to CAN/CSA 22.2 No. 120
 ETL Sanitation to NSF/ANSI 7



In Accordance with
AHRI Std 1200

DOE 2017
 Energy Efficiency
 Compliant

Important Notes:

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle.
- 2) 62" minimum door entry clearance required (without shipping skid).
- 3) Units must be shimmed during installation to ensure the unit is level and plumb.

⚠ WARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.