

Fusion

GJDSS Refrigerated Self-Service Case

Structural Concepts®

DELIVERING FRESH. ALWAYS.™

- **GJDSS4RLB** 51"L x 18-5/8"D x 23"H
- **GJDSS5RLB** 62-7/8"L x 18-5/8"D x 23"H
- **GJDSS6RLB** 75-3/8"L x 18-5/8"D x 23"H
- **GJDSS8RLB** 99-3/4"L x 18-5/8"D x 23"H
- **GJDSS12RLB** 148-1/2"L x 18-5/8"D x 23"H

Included

- LED top light
- One year parts & labor warranty
- Remote DX refrigeration
- Stainless steel rear exterior
- Use with GM remote service models
- Warmest average product temperature of 40°F or less



GJDSS12RLB


Specify	Standard Features	Additional Options
EXTERIOR COLOR	• Laminate (stock colors)	• Laminate (non-stock colors) • Powder coated (stock/non-stock colors) • Powder coated Silversan Black • Stainless steel
INTERIOR COLOR	• Powder coated Silversan Black	• Stainless steel
LOWER FRONT PANEL COLOR	• Powder coated Silversan Black	• Powder coated (stock/non-stock colors) • Stainless steel
BASE SUPPORT	• Rail system for shims	
BUMPER FRONT	• 1" Boston bumper (specify color)	• 1" Stainless steel plate rail bumper
END PANELS	• Full w/stainless steel mirror interior	• Cutaway w/glass
PRICE TAG MOLDING	• None	• 1" Price tag molding (black or silver) • Universal price tag molding (clear w/ open top)
LIGHTS	• LED 3500K w/ frosted lens	• LED 4000K w/ frosted lens
ELECTRICAL CONNECTION	• Electrical leads (remote)	
REFRIGERATION	• Remote DX refrigeration	• Remote w/thermostat, solenoid & TXV
SENSOR	• None	• CPC discharge air sensor (remote)
ACCESSORIES		• Drain strainer

Intended Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.

Zone	Intended Product To Be Displayed	Warmest Avg Prod Temp ° F
1	Packaged refrigerated products	40

PLAN VIEW

SIDE VIEW

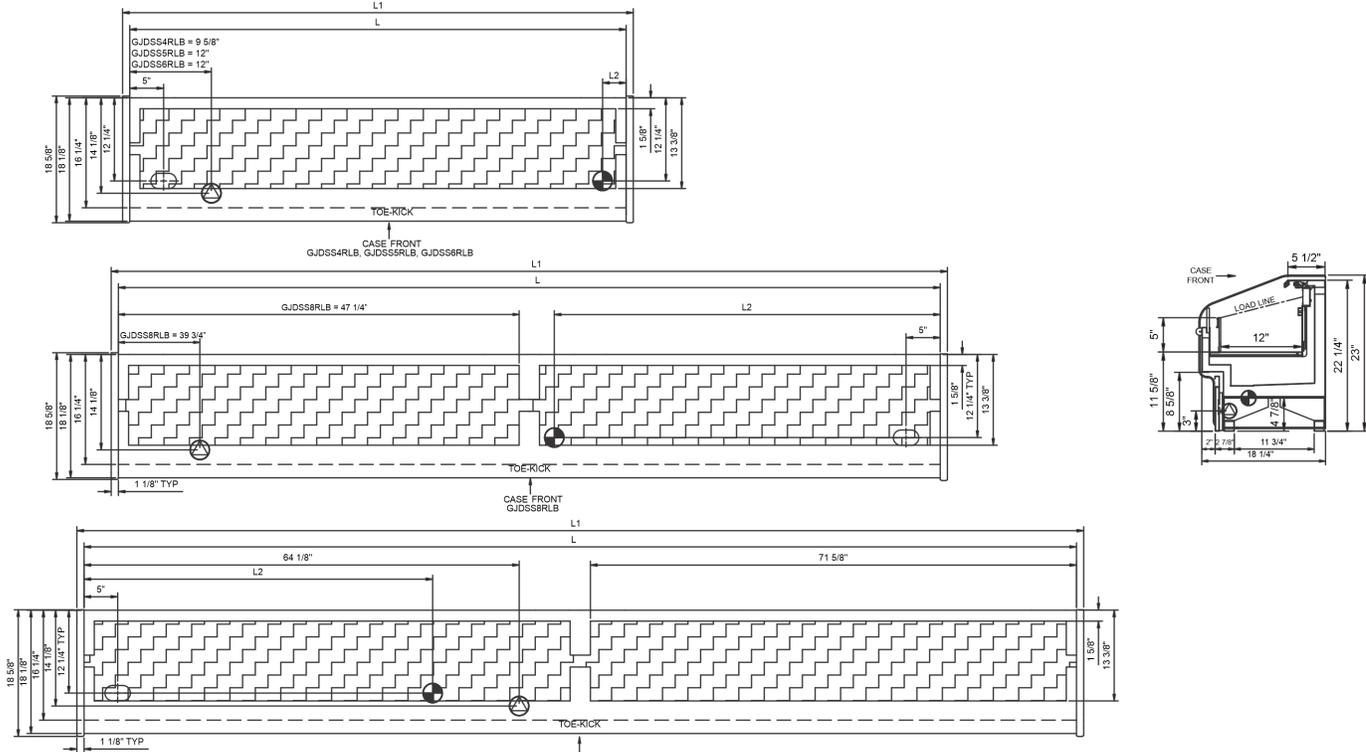

NOTE: ALL DIMENSIONS APPROXIMATE

-  **ELECTRICAL JUNCTION BOX**
(SUPPLIED WITH 6" LEADS OR POWER CORD).
-  **REFRIGERATION LINE CONNECTION.**
-  **SELF-CONTAINED CASE SERVICE ACCESS AREA.**
-  **LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY**
(SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).
-  **REMOTE FLOOR SINK & UTILITIES ACCESS AREA.**
-  **DRY CASE SERVICE ACCESS AREA.**

Model Technical Specifications

Model	L"	L1"	L2"	System Circuit Volts		Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack BTUH	Para. Rack BTUH	Est Wt	
				Remote (DX)	Circuit #1											
GJDSS4RLB	48.75	51.00	3.50	Remote (DX)	Circuit #1	110-120	1	60	1.58	34	2+G	Leads Single	20.00	1080	1000	400
GJDSS5RLB	60.63	62.88	3.50	Remote (DX)	Circuit #1	110-120	1	60	1.63	43	2+G	Leads Single	20.00	1231	1140	450
GJDSS6RLB	73.13	75.38	3.50	Remote (DX)	Circuit #1	110-120	1	60	1.69	53	2+G	Leads Multiple	20.00	1382	1280	500
GJDSS8RLB	97.50	99.75	3.50	Remote (DX)	Circuit #1	110-120	1	60	1.76	66	2+G	Leads Multiple	20.00	2160	2000	625
				Remote (GLYCOL 35%)	Circuit #1	110-120	1	60	1.76	68	2+G	Leads Multiple	20.00	2160	2000	
GJDSS12RLB	146.25	148.50	51.38	Remote (DX)	Circuit #1	110-120	1	60	1.95	99	2+G	Leads Multiple	20.00	3197	2960	990
				Remote (R744 TRANSCRIT)	Circuit #1	110-120	1	60	1.95	99	2+G	Leads Multiple	20.00	3197	2960	

*** Does not include electric defrost on freezer models.

Regulatory Approvals:

All Models
 Accordance with AHRI Std 1200
 ETL Listed to UL 471
 ETL Listed to CAN/CSA 22.2 No. 120
 ETL Sanitation to NSF/ANSI 7



In Accordance with
AHRI Std 1200

DOE 2017
Energy Efficiency
Compliant

Important Notes:

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle.
- 2) Units must be shimmed during installation to ensure the unit is level and plumb.

⚠ WARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.