

# Fusion

GLDSV 52"H Refrigerated Service Case

**Structural Concepts®**

DELIVERING FRESH. ALWAYS.™

(Lengths do not include 1-1/8" end panels)

- **GLDSV3R** 36-3/4"L x 47-7/8"D x 51-5/8"H
- **GLDSV4R** 48-3/4"L x 47-7/8"D x 51-5/8"H
- **GLDSV5R** 60-5/8"L x 47-7/8"D x 51-5/8"H
- **GLDSV6R** 73-1/8"L x 47-7/8"D x 51-5/8"H
- **GLDSV8R** 97-1/2"L x 47-7/8"D x 51-5/8"H

## Included

- Integrated average product temperature of 40°F or less
- LED top light
- One year parts & labor; 5 year compressor warranty
- Stainless steel rear exterior
- Vertical, UV bonded lift-up front glass w/o lock



**GLDSV4R**

Specify	Standard Features	Additional Options
<b>EXTERIOR COLOR</b>	• Laminate (stock colors)	• Laminate (non-stock colors) • Powder coated (stock/non-stock colors) • Powder coated Silversan Black • Stainless steel
<b>INTERIOR COLOR</b>	• Powder coated Silversan Black	• Stainless steel
<b>LOWER FRONT PANEL COLOR</b>	• Powder coated Silversan Black	• Powder coated (stock/non-stock colors) • Stainless steel
<b>BASE SUPPORT</b>	• Casters w/ levelers (self-cont.)	• Rail system for shims (remote)
<b>BUMPER FRONT</b>	• 1" Boston bumper (specify color)	• 1" Stainless steel plate rail bumper
<b>DISPLAY</b>	• None	• 2"H Full depth display riser(s)
<b>END PANELS</b>	• Full w/stainless steel mirror interior	• Cutaway w/glass • None (specify per line-up)
<b>REAR LEDGE</b>	• Black Sanalite®	• Stainless steel
<b>SCALE STAND</b>	• None	• Scale stand w/ receptacle & CAT5 (specify location) • Scale stand w/ receptacle (specify location)
<b>PRICE TAG MOLDING</b>	• None	• 1" Price tag molding (black or silver) • Universal price tag molding (clear w/ open top)
<b>REAR DOORS</b>	• Acrylic rear sliding doors w/o lock	
<b>LIGHTS</b>	• LED 3500K w/ frosted lens	• LED 4000K w/ frosted lens
<b>ELECTRICAL CONNECTION</b>	• 6' Straight blade power cord (self-cont.)	• 6' Locking power cord (self-cont.) • Electrical leads (remote)
<b>REFRIGERATION</b>	• Breeze self-contained refrigeration	• Remote DX refrigeration • Remote w/thermostat, solenoid & TXV
<b>SENSOR</b>	• None	• CPC discharge air sensor (remote)
<b>MISCELLANEOUS</b>		• Front glass lock • Rear door lock
<b>ACCESSORIES</b>		• Clean Sweep® coil cleaner (self-cont.) • Drain strainer • Stainless steel condiment rail system


**Option Notes:** 1 - Separate circuit required

**Intended Environment:** Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.

Zone	Intended Product To Be Displayed	Warmest Avg Prod Temp ° F
1	Unpackaged refrigerated products	38-40

PLAN VIEW

SIDE VIEW

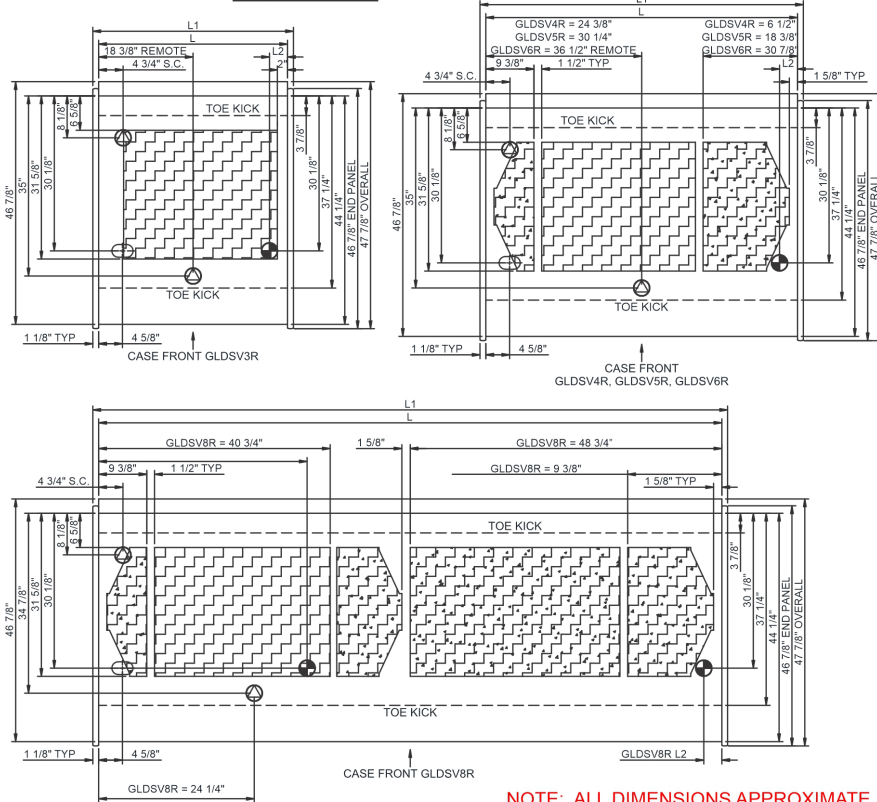

⊕ ELECTRICAL JUNCTION BOX  
(SUPPLIED WITH 6" LEADS OR POWER CORD).  
⊖ LOCATION OF DRAIN TUBE FOR REMOTE REF.  
ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

⊕ REFRIGERATION LINE CONNECTION.  
⊖ REMOTE FLOOR SINK & UTILITIES  
ACCESS AREA.

⊕ SELF-CONTAINED CASE SERVICE ACCESS AREA.  
⊖ DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications																
Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack BTU/H	Para. Rack BTU/H	Est Wt
GLDSV3R	36.75	39.00	3.50	Remote (DX)	Circuit #1	110-120	1	60	1.70	22	2+G	Leads Multiple	20.00	929	860	950
				Self-Contained (R513A)	Circuit #1	110-120	1	60	6.20	562	2+G	5-15P or L5-15P	N/A	N/A	N/A	
GLDSV4R	48.75	51.00	3.50	Remote (DX)	Circuit #1	110-120	1	60	1.53	106	2+G	Leads Multiple	20.00	1179	1092	1,050
				Remote (GLYCOL 35%)	Circuit #1	110-120	1	60	1.53	106	2+G	Leads Multiple	20.00	1179	1092	
				Self-Contained (R513A)	Circuit #1	110-120	1	60	10.06	758	2+G	5-20P or L5-20P	N/A	N/A	N/A	
GLDSV5R	60.63	62.88	3.50	Remote (DX)	Circuit #1	110-120	1	60	2.02	84	2+G	Leads Multiple	20.00	1568	1452	1,150
				Self-Contained (R513A)	Circuit #1	110-120	1	60	14.62	1,008	2+G	5-20P or L5-20P	N/A	N/A	N/A	
GLDSV6R	73.13	75.38	3.50	Remote (DX)	Circuit #1	110-120	1	60	2.29	82	2+G	Leads Multiple	20.00	1771	1640	1,250
				Remote (GLYCOL 35%)	Circuit #1	110-120	1	60	2.29	82	2+G	Leads Multiple	-	1771	1640	
				Self-Contained (R513A)	Circuit #1	110-120	1	60	14.91	1,045	2+G	5-20P or L5-20P	N/A	N/A	N/A	
GLDSV8R	97.50	99.75	3.50	Remote (DX)	Circuit #1	110-120	1	60	2.29	216	2+G	Leads Multiple	20.00	2268	2100	1,750
				Remote (GLYCOL 35%)	Circuit #1	110-120	1	60	2.29	216	2+G	Leads Multiple	20.00	2268	2100	
				Self-Contained (R449A)	Circuit #1	110-120	1	60	16.00	1,440	2+G	5-20P or L5-20P	N/A	N/A	N/A	

\*\*\* Does not include electric defrost on freezer models.

## Regulatory Approvals:

All Models  
 Accordance with AHRI Std 1200  
 ETL Listed to UL 471  
 ETL Listed to CAN/CSA 22.2 No. 120  
 ETL Sanitation to NSF/ANSI 7



In Accordance with  
**AHRI Std 1200**

**DOE 2017**  
 Energy Efficiency  
 Compliant

## Important Notes:

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle.
- 2) 50" minimum door entry clearance required (without shipping skid).
- 3) Units must be shimmed during installation to ensure the unit is level and plumb.

**⚠ WARNING:** This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).