

• CSC3223 30-7/8"L x 21-7/8"D x 38-3/8"H



- Included**
- 6' Straight blade power cord
 - Black interior
 - Black trim
 - Glass end
 - Glass swinging front doors
 - Holds (4) 18" x 26" trays
 - LED 3500K side lights
 - Light switch in base
 - NOTE: Trays not supplied with unit.
 - One year parts & labor warranty
 - Tray support non-lighted shelves, (trays not included)



Specify	Standard Features	Additional Options
BASE	• 8"H base w/bag area - Gray	• 2"H solid base w/o bag area - Black • 2"H solid base w/o bag area - Gray • 8"H base w/bag area - Black
FRONT DOOR GRAPHICS	• None	• Front door graphics (customer supplied)
HEADER GRAPHICS	• None	• Header sign graphics (customer supplied) • Header sign, plain
REAR DOORS	• None (solid back panel)	1 • Clear glass rear swinging doors w/o lock • Mirror back panel
MISCELLANEOUS		• Second year parts & labor warranty

Option Notes: 1 - Increases depth of case to 23-5/8"D



Intended Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.

Zone	Intended Product To Be Displayed	Warmest Avg Prod Temp ° F
1	Unpackaged non-refrigerated products	Ambient

PLAN VIEW



SIDE VIEW

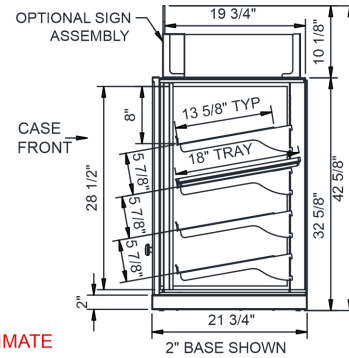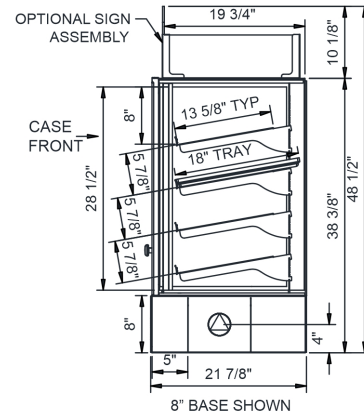

NOTE: ALL DIMENSIONS APPROXIMATE

⊗ ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
⊙ LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

⊕ REFRIGERATION LINE CONNECTION.
⊞ REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

⊞ SELF-CONTAINED CASE SERVICE ACCESS AREA.
⊞ DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications																
Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack RTU/H	Para. Rack RTU/H	Est Wt
CSC3223	N/A	30.88	.00	Ambient/Lights (N/A)	Circuit #1	110-120	1	60	0.70	6	2+G	5-15P	N/A	N/A	N/A	250

*** Does not include electric defrost on freezer models.

Regulatory Approvals:

All Models ETL Listed to UL 65
ETL Sanitation to NSF/ANSI 2



DOE 2017
Energy Efficiency
Compliant

Important Notes:

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) 24 1/8" Minimum door entry clearance required (Without shipping skid).

⚠ WARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Placement of Case

Consider where the display case will be positioned relative to walls, ceilings, HVAC vents, windows, and other equipment discharging warm air.

The 5' - 10' - 15' Rule

Stay 5' away from an exterior window

Direct sunlight increases the heat load on the front of the display resulting in the refrigeration system having to work harder and possible condensation on the case.

With service display cases that have a glass front, air blowing on the front glass causes condensation to develop.

Remain 10' away from HVAC ceiling vents

Air blowing on the front of the display interrupts the air curtain and causes product temperatures to increase.

Position the display 15' away from exterior doors

Air drafts from the front exterior doors interrupt the air curtain, allowing warm air to penetrate the inside of the display, affecting product temperature.

Minimum 4" clearance to walls & ceilings.

Refer to spec sheets & design guide for further information.

