

Fusion

Ambient Inline Packaging Counter

Structural Concepts®

DELIVERING FRESH. ALWAYS.™

• MD2278SO

24-1/4"L x 29-1/4"D x 78-1/2"H

Included

- LED top & shelf lights
- One year parts & labor warranty
- Shelving removable and adjustable on 1" centers
- Stainless steel rear exterior
- Tissue box holder
- Trash chute with pull out front door




MD2278SO


Specify	Standard Features	Additional Options
EXTERIOR COLOR	• Powder coated Silversan Black	• Powder coated (stock/non-stock colors)
INTERIOR COLOR	• Powder coated Silversan Black	• Stainless steel
LOWER FRONT PANEL COLOR	• Powder coated Silversan Black	• Powder coated (stock/non-stock colors) • Stainless steel
BASE	• Base w/storage for packaging supplies	
BASE SUPPORT	• Rail system for shims	
BUMPER FRONT	• 1" Boston bumper (specify color)	• 1" Stainless steel plate rail bumper
END PANELS	• Full w/stainless steel mirror interior	• None (specify per line-up)
SHELVING	• (4) Lighted solid shelves	
LIGHTS	• LED 3500K w/ frosted lens	
ELECTRICAL CONNECTION	• Leads	
MISCELLANEOUS		• Second year parts & labor warranty

Intended Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.	
Zone 1	Intended Product To Be Displayed Warmest Avg Prod Temp ° F

PLAN VIEW

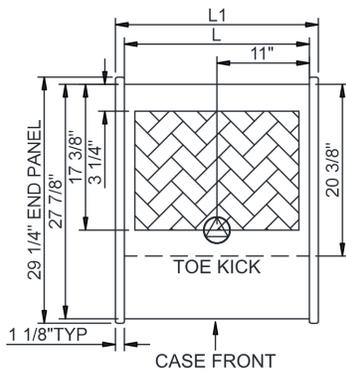

SIDE VIEW

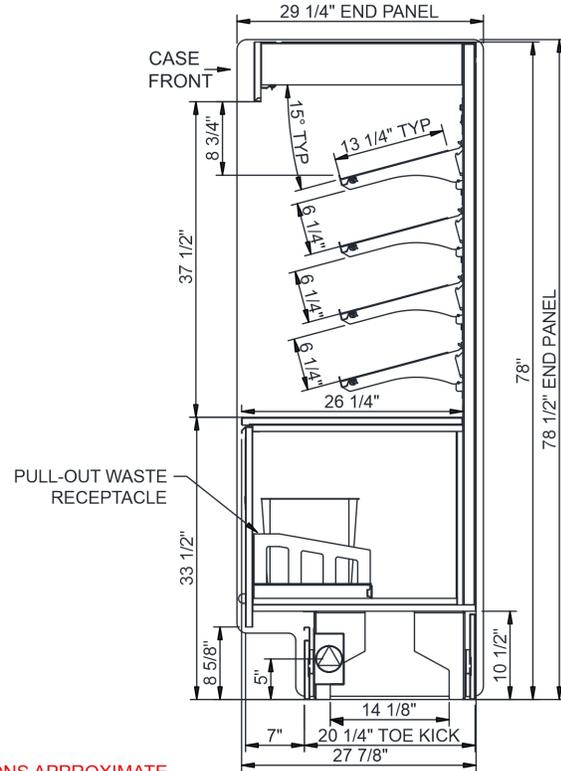

NOTE: ALL DIMENSIONS APPROXIMATE

-  **ELECTRICAL JUNCTION BOX**
(SUPPLIED WITH 6" LEADS OR POWER CORD).
-  **LOCATION OF DRAIN TUBE FOR REMOTE REF.**
ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

-  **REFRIGERATION LINE CONNECTION.**
-  **REMOTE FLOOR SINK & UTILITIES**
ACCESS AREA.

-  **SELF-CONTAINED CASE SERVICE ACCESS AREA.**
-  **DRY CASE SERVICE ACCESS AREA.**

Model Technical Specifications																		
Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack BTUH	Para. Rack BTUH	Est Wt		
MD2278SO	22.00	24.25	.00	Ambient/Lights (N/A)			Circuit #1	110-120	1	60	0.70	13	2+G	Leads Single	N/A	N/A	N/A	600

*** Does not include electric defrost on freezer models.

Regulatory Approvals:

All Models	ETL Listed to UL 65 ETL Sanitation to NSF/ANSI 2
------------	---



Important Notes:

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle.
- ⚠ WARNING:** This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.