

# Fusion

Self-Service Doored Reach-In Front - 72"H

Structural Concepts®

DELIVERING FRESH. ALWAYS.™

(Lengths do not include 1-1/8" end panels)

- MD472DR 48"L x 37-1/8"D x 72-1/2"H
- MD672DR 72"L x 37-1/8"D x 72-1/2"H

## Included

- Glass swinging front doors
- Integrated average product temperature of 40°F or less
- LED top & shelf lights
- MD472DR - 2 Doors
- MD672DR - 3 Doors
- One year parts & labor warranty
- Remote DX refrigeration
- Stainless steel rear exterior




MD672DR

Specify	Standard Features	Additional Options
<b>EXTERIOR COLOR</b>	• Powder coated Silversan Black	• Powder coated (stock/non-stock colors)
<b>INTERIOR COLOR</b>	• Powder coated Silversan Black	• Stainless steel
<b>LOWER FRONT PANEL COLOR</b>	• Powder coated Silversan Black	• Powder coated (stock/non-stock colors) • Stainless steel
<b>BASE SUPPORT</b>	• Rail system for shims	
<b>BUMPER FRONT</b>	• 1" Boston bumper (specify color)	• 1" Stainless steel plate rail bumper
<b>END PANELS</b>	• Full w/stainless steel mirror interior	• Cutaway w/glass • None (specify per line-up)
<b>FRONT DOORS</b>	• Left hand hinge (customer facing)	• Right hand hinge (customer facing)
<b>HEADER</b>	• Flat header	
<b>PRICE TAG MOLDING</b>	• None	• Universal price tag molding (clear w/ open top)
<b>REAR DOORS</b>	• None (solid back panel)	• Solid rear swinging door(s) w/lock
<b>RISERS</b>	• None	• 2"H Full depth display riser(s) (matches interior)
<b>SHELVING</b>	• (4) Lighted clear glass shelves	• (5) Lighted clear glass shelves
<b>LIGHTS</b>	• LED 3500K w/ frosted lens	
<b>ELECTRICAL CONNECTION</b>	• Electrical leads (remote)	
<b>REFRIGERATION</b>	• Remote DX refrigeration	• Remote w/thermostat, solenoid & TXV
<b>SENSOR</b>	• None	• CPC discharge air sensor (remote)
<b>MISCELLANEOUS</b>		• Second year parts & labor warranty


<b>Intended Environment:</b> Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.		
<b>Zone</b>	<b>Intended Product To Be Displayed</b>	<b>Warmest Avg Prod Temp ° F</b>
1	Packaged / unpackaged refrigerated products	40

## PLAN VIEW

## SIDE VIEW

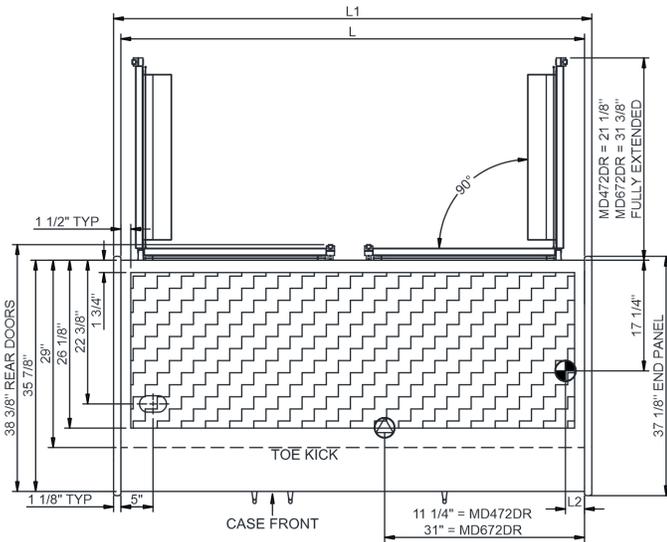

MODEL	WD x HT x QTY
MD472DR	17" x 47 3/4" x 2
MD672DR	27 1/8" x 47 3/4" x 2

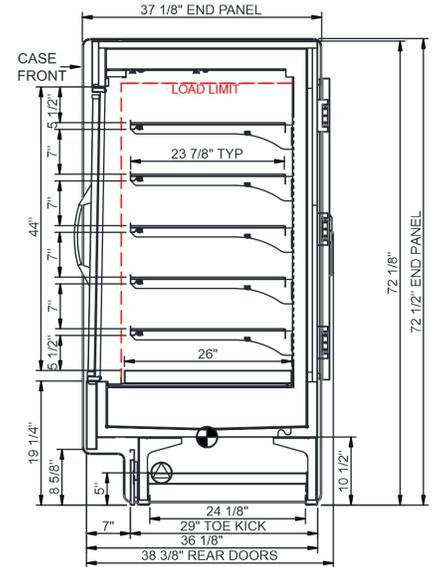

NOTE: ALL DIMENSIONS APPROXIMATE

- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
- LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

- REFRIGERATION LINE CONNECTION.
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

- SELF-CONTAINED CASE SERVICE ACCESS AREA.
- DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications																
Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack RTUH	Para. Rack RTUH	Est Wt
MD472DR	48.00	50.25	3.00	Remote (DX)	Circuit #1	110-120	1	60	2.00	100	2+G	Leads Multiple	26.00	1469	1360	1,050
				Remote (GLYCOL 35%)	Circuit #1	110-120	1	60	2.00	100	2+G	Leads Multiple	26.00	1469	1360	
				Remote (R744 TRANSCRIT)	Circuit #1	110-120	1	60	2.00	100	2+G	Leads Multiple	26.00	1469	1360	
MD672DR	72.00	74.25	3.00	Remote (DX)	Circuit #1	110-120	1	60	2.00	135	2+G	Leads Multiple	28.00	2246	2080	1,400
				Remote (GLYCOL 35%)	Circuit #1	110-120	1	60	2.00	135	2+G	Leads Multiple	20.00	2246	2080	

\*\*\* Does not include electric defrost on freezer models.

### Regulatory Approvals:

All Models  
 Accordance with AHRI Std 1200  
 ETL Listed to UL 471  
 ETL Listed to CAN/CSA 22.2 No. 120  
 ETL Sanitation to NSF/ANSI 7



In Accordance with  
**AHRI Std 1200**

**DOE 2017**  
 Energy Efficiency  
 Compliant

### Important Notes:

1) Units must be shimmed during installation to ensure the unit is level and plumb.

**⚠ WARNING:** This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).