

Fusion

Self-Service Doored Reach-In Front - 72"H

Structural Concepts®

DELIVERING FRESH. ALWAYS.™

- MD472DR 50-1/4"L x 37-1/8"D x 72-1/2"H
- MD672DR 74-1/4"L x 37-1/8"D x 72-1/2"H

Included

- Glass swinging front doors
- LED top & shelf lights
- MD472DR - 2 Doors
- MD672DR - 3 Doors
- One year parts & labor warranty
- Remote DX refrigeration
- Stainless steel rear exterior
- Warmest average product temperature of 40°F or less



MD672DR

| Specify | Standard Features | Additional Options |
|-------------------------|------------------------------------------|---------------------------------------------------------------|
| EXTERIOR COLOR | • Powder coated Silversan Black | • Powder coated (stock/non-stock colors) |
| INTERIOR COLOR | • Powder coated Silversan Black | • Stainless steel |
| LOWER FRONT PANEL COLOR | • Powder coated Silversan Black | • Powder coated (stock/non-stock colors) • Stainless steel |
| BASE SUPPORT | • Rail system for shims | |
| BUMPER FRONT | • 1" Boston bumper (specify color) | • 1" Stainless steel plate rail bumper |
| END PANELS | • Full w/stainless steel mirror interior | • Cutaway w/glass • None (specify per line-up) |
| FRONT DOORS | • Left hand hinge (customer facing) | • Right hand hinge (customer facing) |
| HEADER | • Flat header | |
| PRICE TAG MOLDING | • None | • Universal price tag molding (clear w/ open top) |
| REAR DOORS | • None (solid back panel) | • Solid rear swinging door(s) w/lock |
| RISERS | • None | • 2"H Full depth display riser(s) (matches interior) |
| SHELVING | • (4) Lighted clear glass shelves | • (5) Lighted clear glass shelves |
| LIGHTS | • LED 3500K w/ frosted lens | |
| ELECTRICAL CONNECTION | • Electrical leads (remote) | |
| REFRIGERATION | • Remote DX refrigeration | • Remote w/thermostat, solenoid & TXV |
| SENSOR | • None | • CPC discharge air sensor (remote) |
| MISCELLANEOUS | | • Second year parts & labor warranty |

Fusion

Self-Service Doored Reach-In Front - 72"H

Structural Concepts®


DELIVERING FRESH. ALWAYS.™

Intended Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.


| Zone | Intended Product To Be Displayed | Warmest Avg Prod Temp ° F |
|------|---------------------------------------------|---------------------------|
| 1 | Packaged / unpackaged refrigerated products | 40 |

PLAN VIEW

SIDE VIEW

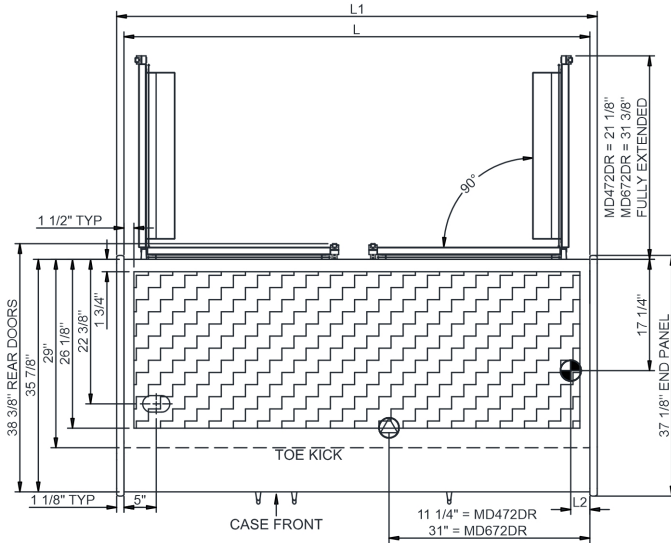

| MODEL | WD x HT x QTY |
|---------|-----------------------|
| MD472DR | 17" x 47 3/4" x 2 |
| MD672DR | 27 1/8" x 47 3/4" x 2 |

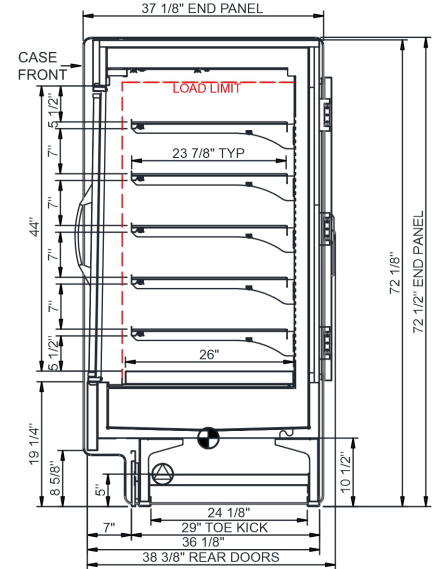

NOTE: ALL DIMENSIONS APPROXIMATE

⊗ ELECTRICAL JUNCTION BOX
(SUPPLIED WITH 6" LEADS OR POWER CORD).
⊙ LOCATION OF DRAIN TUBE FOR REMOTE REF.
ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

⊕ REFRIGERATION LINE CONNECTION.
⊞ REMOTE FLOOR SINK & UTILITIES
ACCESS AREA.

⊞ SELF-CONTAINED CASE SERVICE ACCESS AREA.
⊞ DRY CASE SERVICE ACCESS AREA.

| Model Technical Specifications | | | | | | | | | | | | | | |
|--------------------------------|-------|-------|------|-------------------------|------------|---------|-----|------|-------------|-------|-------|----------------|-------|---------------------|
| Model | L" | L1" | L2" | System Circuit Volts | | | Phs | Freq | Amps *** | Watts | Wires | NEMA Plug | SST | Conv. Rack BTU/H |
| MD472DR | 48.00 | 50.25 | 3.00 | Remote (DX) | Circuit #1 | 110-120 | 1 | 60 | 2.00 | 100 | 2+G | Leads Multiple | 26.00 | 1469 |
| | | | | Remote (GLYCOL 35%) | Circuit #1 | 110-120 | 1 | 60 | 2.00 | 100 | 2+G | Leads Multiple | 26.00 | 1469 |
| | | | | Remote (R744 TRANSCRIT) | Circuit #1 | 110-120 | 1 | 60 | 2.00 | 100 | 2+G | Leads Multiple | | 1469 |
| MD672DR | 72.00 | 74.25 | 3.00 | Remote (DX) | Circuit #1 | 110-120 | 1 | 60 | 2.00 | 135 | 2+G | Leads Multiple | 28.00 | 2246 |
| | | | | Remote (GLYCOL 35%) | Circuit #1 | 110-120 | 1 | 60 | 2.00 | 135 | 2+G | Leads Multiple | 20.00 | 2246 |
| | | | | | | | | | | | | | | 2080 |
| | | | | | | | | | | | | | | 1,050 |
| | | | | | | | | | | | | | | 1,400 |

*** Does not include electric defrost on freezer models.

Regulatory Approvals:

All Models
 Accordance with AHRI Std 1200
 ETL Listed to UL 471
 ETL Listed to CAN/CSA 22.2 No. 120
 ETL Sanitation to NSF/ANSI 7



In Accordance with
AHRI Std 1200

DOE 2017
 Energy Efficiency
 Compliant

Important Notes:

1) Units must be shimmed during installation to ensure the unit is level and plumb.

⚠ WARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.