

# Technical Information

Fusion - Self-Service Refrigerated Open Reach-In - 78"H

Structural Concepts®

DELIVERING FRESH. ALWAYS.™

## DIMENSIONS / SHIPPING

Model	L"	L1"	L2"	Est Wt (lbs)
MD478R	48.000	50.250	3.000	N/A
MD678R	72.000	74.250	3.000	N/A

## ELECTRICAL

Model	System Circuit Volts			Ph	Frq	Rated Load Amps	Min Cir Amps	Max OCP Amps	Watts	Wires	NEMA Plug	Amps Lights	Amps Fans	Amps Anti-Sweats	Amps Misc/Refrig/Heat
MD478R	Remote (DX)	Circuit #1	110-120	1	60	2.26	15	15	132	2+G	Leads Multiple	1.40	0.60	0.18	0.08
MD678R	Remote (DX)	Circuit #1	110-120	1	60	2.64	15	15	147	2+G	Leads Multiple	1.40	0.90	0.26	0.08

## REFRIGERATION

Model	Zone	Section	System	Envr	REMOTE REFRIGERATION					GLYCOL / R744 REFRIGERATION			
					SST (°F)	Conv. Rack BTUH	Para. Rack BTUH	Defrost Interval (Hrs)	Defrost Duration	Total GPM	Pressure Drop (psi)	Concent (%)	Liquid Temp (°F)
MD478R	All	Main	Remote-DX	Type I	20	5,184	4,800	4.00	25.00	N/A	N/A	N/A	N/A
MD678R	All	Main	Remote-DX	Type I	20	9,072	8,400	4.00	30.00	N/A	N/A	N/A	N/A

## INTENDED ENVIRONMENT

Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise under Envt above.

## IMPORTANT NOTES

1) Units must be shimmed during installation to ensure the unit is level and plumb.

## WARMEST AVERAGE PRODUCT TEMP & INTENDED USE OF ZONES

Zone	Temp (°F)	Intended Use
1	40	Packaged / unpackaged refrigerated products

## REGULATORY


All Models	Accordance with AHRI Std 1200 ETL Listed to UL 471 ETL Listed to CAN/CSA 22.2 No. 120 ETL Sanitation to NSF/ANSI 7
------------	-----------------------------------------------------------------------------------------------------------------------------






In Accordance with  
**AHRI Std 1200**

Technical Information

Fusion - Self-Service Refrigerated Open Reach-In - 78"H

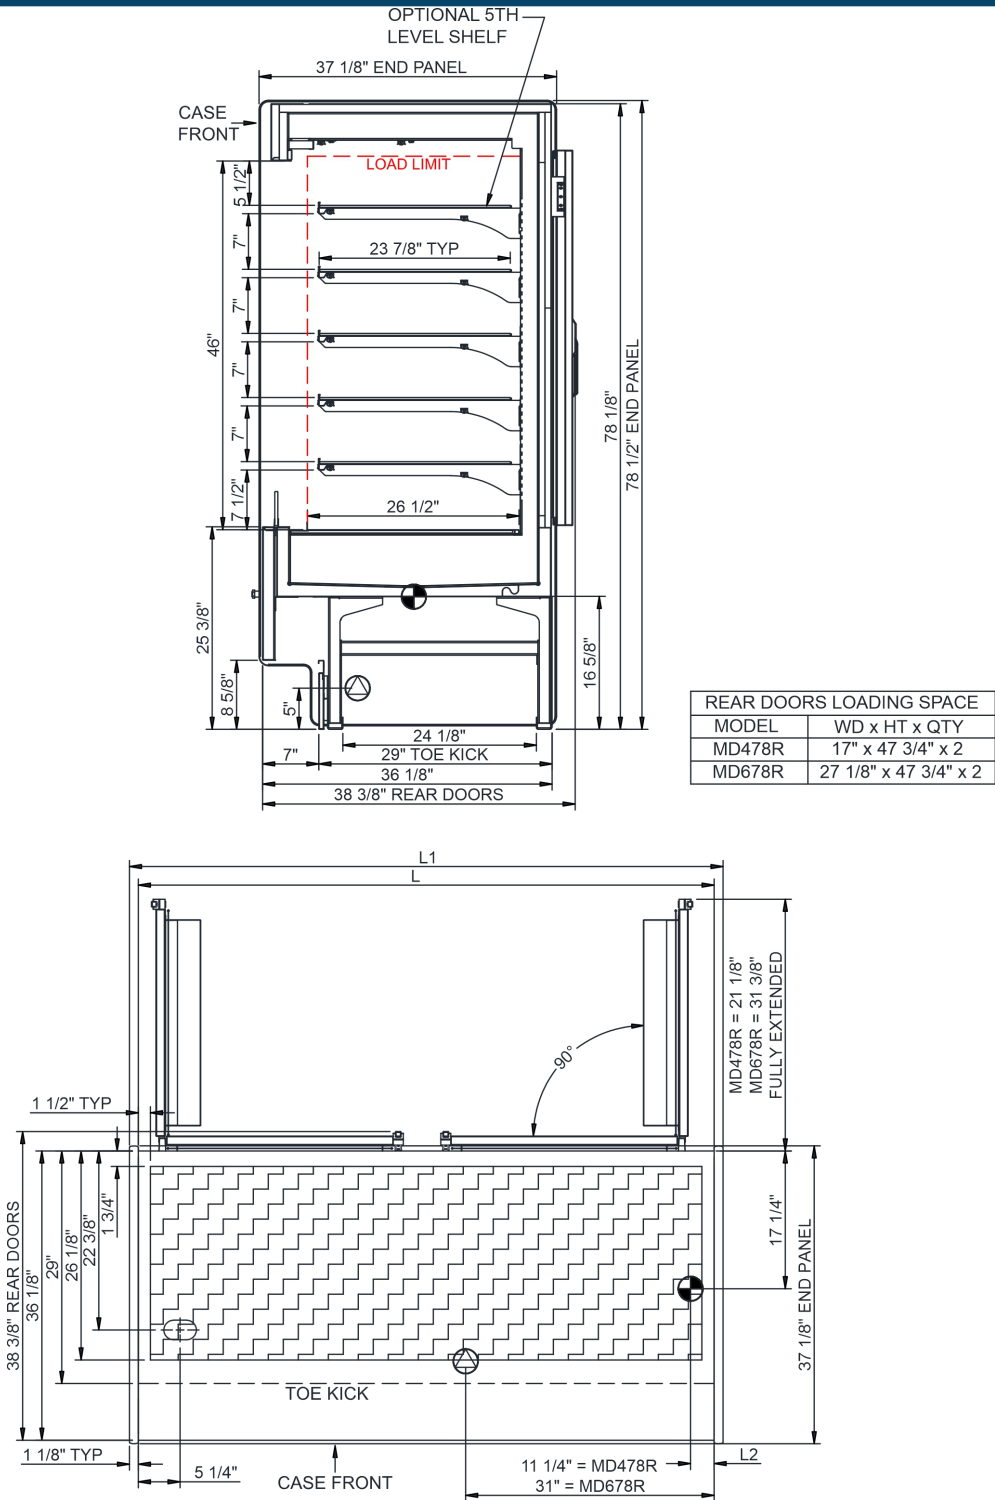

NOTE: ALL DIMENSIONS APPROXIMATE

-  ELECTRICAL JUNCTION BOX  
(SUPPLIED WITH 6" LEADS OR POWER CORD).
-  REFRIGERATION LINE CONNECTION.
-  SELF-CONTAINED CASE SERVICE ACCESS AREA.
-  LOCATION OF DRAIN TUBE FOR REMOTE REF.  
ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).
-  REMOTE FLOOR SINK & UTILITIES  
ACCESS AREA.
-  DRY CASE SERVICE ACCESS AREA.