

Technical Information

Fusion - Self-Service Doored Reach-In Front - 84"H

Structural Concepts®

DELIVERING FRESH. ALWAYS.™

DIMENSIONS / SHIPPING

Model	L"	L1"	L2"	Est Wt (lbs)
MD484DR	48.000	50.250	3.000	N/A
MD684DR	72.000	74.250	3.000	N/A

ELECTRICAL

Model	System Circuit Volts			Ph	Frq	Rated Load Amps	Min Cir Amps	Max OCP Amps	Watts	Wires	NEMA Plug	Amps Lights	Amps Fans	Amps Anti-Sweats	Amps Misc/Refrig/Heat
MD484DR	Remote (DX)	Circuit #1	110-120	1	60	2.08	15	15	122	2+G	Leads Multiple	1.40	0.60		0.08
	Remote (GLYCOL)	Circuit #1	110-120	1	60	2.00	15	15	112	2+G	Leads Multiple	1.40	0.60		N/A
	Remote (R744 T)	Circuit #1	110-120	1	60	2.08	15	15	122	2+G	Leads Multiple	1.40	0.60		0.08
MD684DR	Remote (GLYCOL)	Circuit #1	110-120	1	60	1.70	15	15	125	2+G	Leads Multiple	1.40	0.30		N/A
	Remote (DX)	Circuit #1	110-120	1	60	2.02	15	15	167	2+G	Leads Multiple	1.40	0.62		N/A
	Remote (R744 T)	Circuit #1	110-120	1	60	2.02	15	15	167	2+G	Leads Multiple	1.40	0.62		N/A

REFRIGERATION

Model	Zone	Section	System	Envt	REMOTE REFRIGERATION					GLYCOL / R744 REFRIGERATION			
					SST (°F)	Conv. Rack BTUH	Para. Rack BTUH	Defrost Interval (Hrs)	Defrost Duration	Total GPM	Pressure Drop (psi)	Concent (%)	Liquid Temp (°F)
MD484DR	All	Main	Remote-DX	Type I	26	1,771	1,640	4.00	30.00	N/A	N/A	N/A	N/A
	All	Main	Remote-Glycol	Type I	N/A	1,771	1,640	4.00	45.00	0.25	0.38	35%	20.00
	All	Main	Remote-R744 TRANSCRITICAL	Type I	26	1,771	1,640	4.00	30.00	N/A	N/A	N/A	N/A
MD684DR	All	Refrigerator	Remote-Glycol	Type I	N/A	2,851	2,640	4.00	45.00	1.20	2.00	35%	20.00
	All	Refrigerator	Remote-DX	Type I	0	2,851	2,640	4.00	45.00	N/A	N/A	N/A	N/A
	All	Refrigerator	Remote-R744 TRANSCRITICAL	Type I	0	2,851	2,640	4.00	45.00	N/A	N/A	N/A	N/A

INTENDED ENVIRONMENT

Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise under Envt above.

IMPORTANT NOTES

1) Units must be shimmed during installation to ensure the unit is level and plumb.

WARMEST AVERAGE PRODUCT TEMP & INTENDED USE OF ZONES

Zone	Temp (°F)	Intended Use
1	40	Packaged / unpackaged refrigerated products

REGULATORY


All Models	Accordance with AHRI Std 1200 ETL Listed to UL 471 ETL Listed to CAN/CSA 22.2 No. 120 ETL Sanitation to NSF/ANSI 7
------------	---



In Accordance with
AHRI Std 1200

Technical Information

Fusion - Self-Service Doored Reach-In Front - 84"H

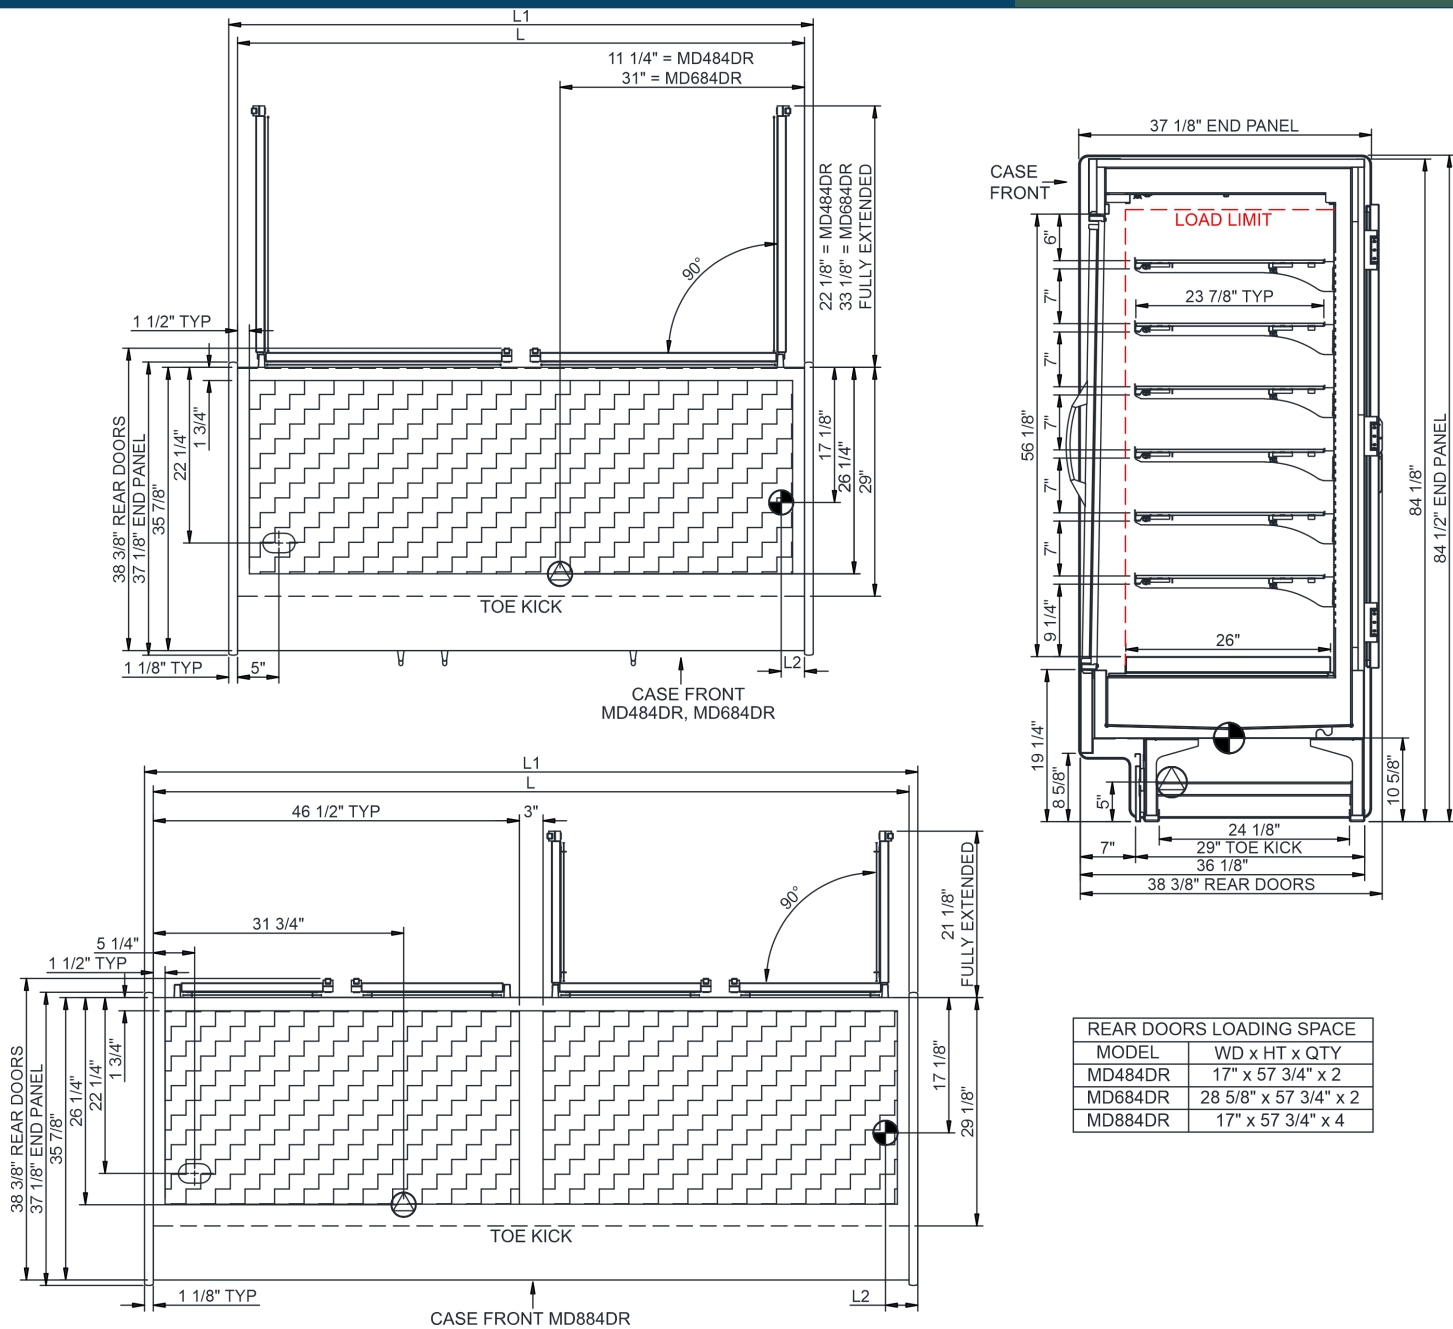

NOTE: ALL DIMENSIONS APPROXIMATE

- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
- REFRIGERATION LINE CONNECTION.
- SELF-CONTAINED CASE SERVICE ACCESS AREA.
- LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.
- DRY CASE SERVICE ACCESS AREA.