Technical Information

Fusion - Self-Service Refrigerated Open Reach-In - 85"H

Structural Concepts®
DELIVERING FRESH. ALWAYS.™

DIMENSIONS / SHIPPING

Model	L"	L1"	L2"	Est Wt (lbs)
MD485R	48.000	50.250	3.000	1,300
MD685R	72.000	74.250	3.000	1,650

ELECTRICAL

Model	System Circuit Volts			Ph	Frq	Rated Load Amps	Min Cir Amps	Max OCP Amps	Watts	Wires	NEMA Plug	Amps Lights	Amps Fans	Amps Anti-Sweats	Amps Misc/Refrig/ Heat
MD485R	Remote (DX)-Type I Env	Circuit #1	110-120	1	60	2.65	15	15	159	2+G	Leads Multiple	1.12	1.35	0.18	N/A
	Remote (DX - A)-Type I Env	Circuit #1	110-120	1	60	3.35	15	15	159	2+G	Leads Multiple	1.12	1.35	0.18	0.70
	Self-Contained (R290)	Circuit #1	208-240	1	60	16.00	20	20	2,864	2+G	6-20P or L6-20P	0.61	0.48	3.50	13.00
	Self-Contained (R290)	Circuit #1	208-240	1	60	16.00	20	20	2,864	2+G	6-20P or L6-20P	N/A	0.48	3.50	13.61
MD685R	Remote (DX)	Circuit #1	110-120	1	60	2.81	15	15	202	2+G	Leads Multiple	1.12	1.35	0.26	0.08
	Remote (DX - A)	Circuit #1	110-120	1	60	3.51	15	15	202	2+G	Leads Multiple	1.12	1.35	0.26	0.78
	Self-Contained (R290)	Circuit #1	208-240	1	60	24.00	30	30	3,863	2+G	6-30P or L6-30P	N/A	0.66	3.55	20.11
	Self-Contained (R290)-Type I Env	Circuit #1	208-240	1	60	24.00	30	30	3,840	2+G	6-30P or L6-30P	N/A	0.72	3.55	20.11

REFRIGERATION

Model	Zone	Section	System	Envt	REMOTE REFRIGERATION					GLYCOL / R744 REFRIGERATION			
					SST (°F)	Conv. Rack BTUH	Para. Rack BTUH	Defrost Interval (Hrs)	Defrost Duratio n	Total GPM	Pressure Drop (psi)	Concent (%)	Liquid Temp (°F)
MD485R	All	Main	Self-Contained-R290	Type I	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	All	Main	Remote-DX-Type I Env	Type I	20	7,456	6,904	4.00	25.00	N/A	N/A	N/A	N/A
	All	Main	Remote-DX - A2L-Type I Env	Type I	20	7,456	6,904	4.00	25.00	N/A	N/A	N/A	N/A
MD685R	All	Main	Self-Contained-R290	Type I	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	All	Main	Remote-DX	Type I	20	11,184	10,356	4.00	30.00	N/A	N/A	N/A	N/A
	All	Main	Remote-DX - A2L	Type I	20	11,184	10,356	4.00	30.00	N/A	N/A	N/A	N/A

INTENDED ENVIRONMENT

Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise under Envt above.

WARMEST AVERAGE PRODUCT TEMP & INTENDED USE OF ZONES

Zone	Temp (°F)	Intended Use
1	40	Packaged / unpackaged refrigerated products-Prechilled to Warmest Avg Prod Temp.

IMPORTANT NOTES

1) Units must be shimmed during installation to ensure the unit is level and plumb.
2) Keep unit at least 15' from exterior doors, overhead HVAC vents, or any air curtain disruption.
3) Performance issues (product temperatures, water on floor, etc.) caused by adverse conditions are not covered by warranty.

REGULATORY


All Models	Accordance with AHRI Std 1200 ETL Listed to UL 471 & UL 60335-2-89 ETL Listed to CAN/CSA 22.2 No. 120 ETL Sanitation to NSF/ANSI 7

In Accordance with AHRI Std 1200


Technical Information

Fusion - Self-Service Refrigerated Open Reach-In - 85"H

Structural Concepts®
DELIVERING FRESH. ALWAYS.™

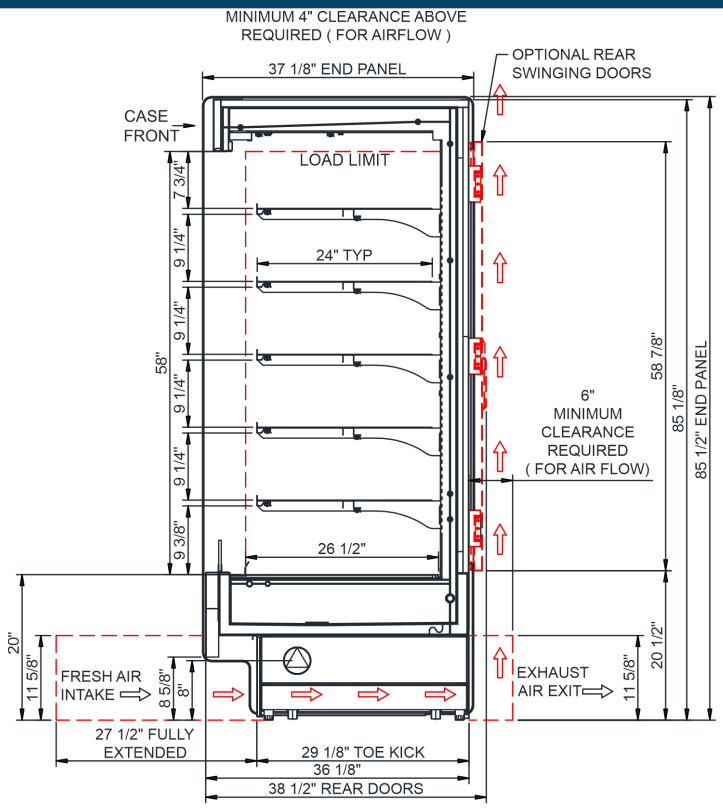

REAR DOORS OPENING	
MODEL	WD x HT x QTY
MD485R	17" x 57 3/4" x 2
MD685R	28 5/8" x 57 3/4" x 2

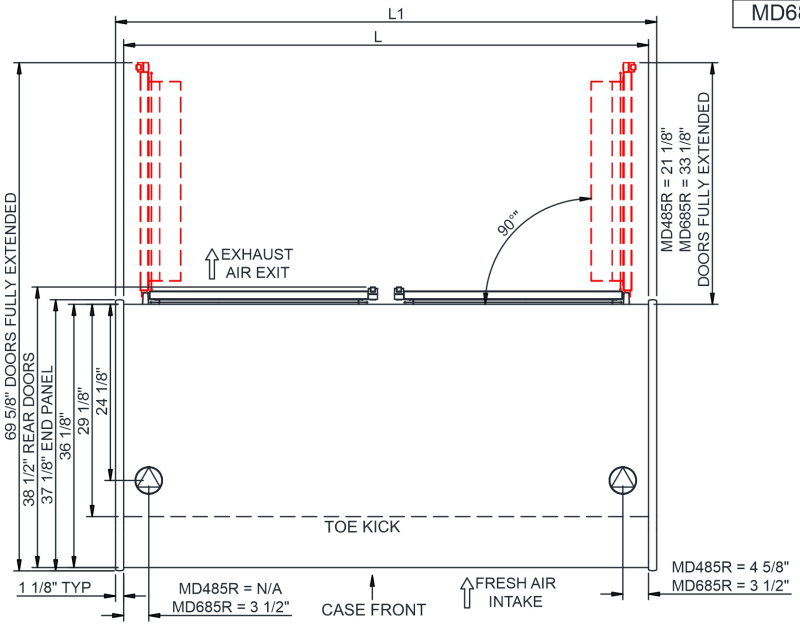

NOTE:
1. SELF-CONTAINED REFRIGERATION ACCESS ONLY BY PULLING OUT CONDENSER DRAWER.

NOTE: ALL DIMENSIONS APPROXIMATE

ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH $\frac{3}{4}$" OR $1\frac{1}{2}$" PVC TUBE).
REFRIGERATION LINE CONNECTION.
REMOTE FLOOR SINK & UTILITIES ACCESS AREA.
SELF-CONTAINED CASE SERVICE ACCESS AREA.
DRY CASE SERVICE ACCESS AREA.