

# Fusion

Self-Service Refrigerated Open Reach-In - 84"H

Structural Concepts®  
DELIVERING FRESH. ALWAYS.™

• MD884R 98-1/4"L x 37-1/8"D x 84-1/2"H

### Included

- LED top & shelf lights
- One year parts & labor warranty
- Open reach-in front
- Remote DX refrigeration
- Solid rear swinging door(s) w/lock
- Stainless steel rear exterior
- Warmest average product temperature of 40°F or less



MD884R

| Specify                 | Standard Features                        | Additional Options  |
|-------------------------|--|---|
| EXTERIOR COLOR          | • Powder coated Silversan Black          | • Powder coated (stock/non-stock colors)                      |
| INTERIOR COLOR          | • Powder coated Silversan Black          | • Stainless steel   |
| LOWER FRONT PANEL COLOR | • Powder coated Silversan Black          | • Powder coated (stock/non-stock colors)<br>• Stainless steel |
| BASE SUPPORT            | • Rail system for shims                  |   |
| BUMPER FRONT            | • 1" Boston bumper (specify color)       | • 1" Stainless steel plate rail bumper                        |
| END PANELS              | • Full w/stainless steel mirror interior | • Cutaway w/glass<br>• None (specify per line-up)             |
| HEADER                  | • Flat header                            |   |
| PRICE TAG MOLDING       | • None                                   | • Universal price tag molding (clear w/ open top)             |
| REAR DOORS              | • Solid rear swinging door(s) w/lock     |   |
| SHELVING                | • (6) Lighted clear glass shelves        |   |
| LIGHTS                  | • LED 3500K w/ frosted lens              |   |
| ELECTRICAL CONNECTION   | • Electrical leads (remote)              |   |
| REFRIGERATION           | • Remote DX refrigeration                | • Remote w/thermostat, solenoid & TXV                         |
| SENSOR                  | • None                                   | • CPC discharge air sensor (remote)                           |
| MISCELLANEOUS           |  | • Second year parts & labor warranty                          |

# Fusion

Self-Service Refrigerated Open Reach-In - 84"H


Structural Concepts®

DELIVERING FRESH. ALWAYS.™


**Intended Environment:** Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.

| Zone | Intended Product To Be Displayed            | Warmest Avg Prod Temp ° F |
|------|---|---------------------------|
| 1    | Packaged / unpackaged refrigerated products | 40                        |

PLAN VIEW

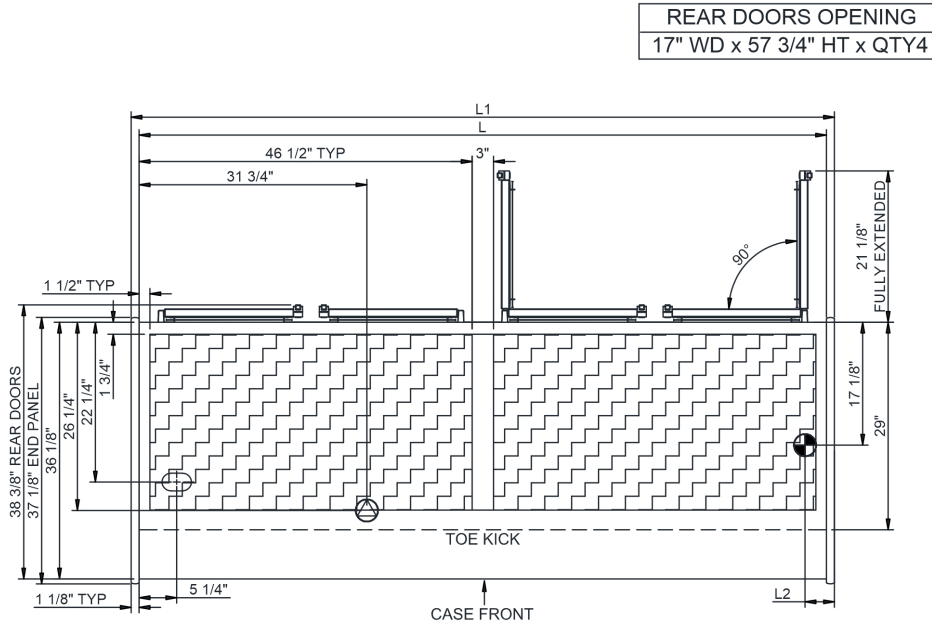

SIDE VIEW

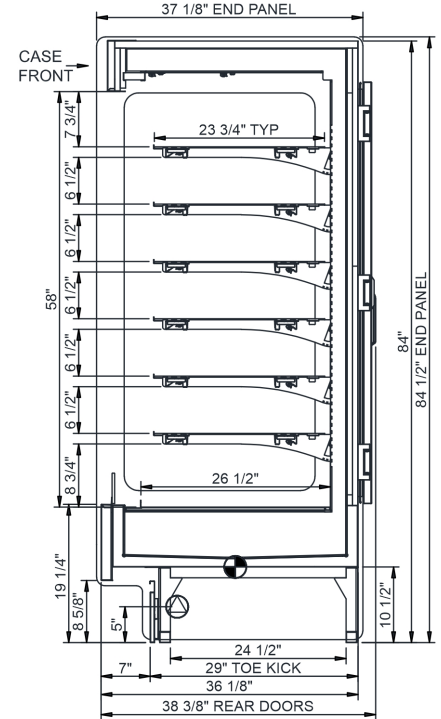

NOTE: ALL DIMENSIONS APPROXIMATE

- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6\"/>

- REFRIGERATION LINE CONNECTION.
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

- SELF-CONTAINED CASE SERVICE ACCESS AREA.
- DRY CASE SERVICE ACCESS AREA.

| Model Technical Specifications |       |       |      |                      |            |         |      |          |       |       |           |              |                  |
|--------------------------------|-------|-------|------|----------------------|------------|---------|------|----------|-------|-------|-----------|--------------|------------------|
| Model                          | L"    | L1"   | L2"  | System Circuit Volts |            | Phs     | Freq | Amps *** | Watts | Wires | NEMA Plug | SST          | Conv. Rack BTU/H |
| MD884R                         | 96.00 | 98.25 | 4.13 | Remote (DX)          | Circuit #1 | 110-120 | 1    | 60       | 4.44  | 269   | 2+G       | Leads Single | 20.00            |
|                                |       |       |      |                      |            |         |      |          |       |       |           |              | 13824            |
|                                |       |       |      |                      |            |         |      |          |       |       |           |              | 12800            |
|                                |       |       |      |                      |            |         |      |          |       |       |           |              | 1,750            |

\*\*\* Does not include electric defrost on freezer models.

## Regulatory Approvals:

All Models  
 Accordance with AHRI Std 1200  
 ETL Listed to UL 471  
 ETL Listed to CAN/CSA 22.2 No. 120  
 ETL Sanitation to NSF/ANSI 7



In Accordance with  
**AHRI Std 1200**

**DOE 2017**  
 Energy Efficiency  
 Compliant

## Important Notes:

1) Units must be shimmed during installation to ensure the unit is level and plumb.

**⚠ WARNING:** This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).