

- C3Z3667

36"L x 41-7/8"D x 67-5/8"H
- C3Z4867

48"L x 41-7/8"D x 67-5/8"H

Included

- Breeze self-contained refrigeration
- Compressor air intake from rear and out front panel at toe kick. Front panel cannot be blocked.
- Full end panel w/mirror interior
- LED 3500K top & shelf lights
- Middle service area w/baffle
- Non-refrigerated upper display
- One year parts & labor; 5 year compressor warranty
- Rear wrapping board
- Self-service refrigerated lower display w/17" solid shelf
- Warmest average product temperature of 40°F or less



C3Z3667



Specify	Standard Features	Additional Options
EXTERIOR COLOR	<div><div>• Laminate (stock colors)</div></div>	<div><div>• Laminate (non-stock colors)</div><div>• Stainless steel</div></div>
INTERIOR COLOR	<div><div>• Powder coated Silversan Black</div></div>	<div><div>• Stainless steel</div></div>
BASE SUPPORT	<div><div>• Levelers</div></div>	<div><div>• 6"H legs</div><div>• Casters</div></div>
REAR DOORS	<div><div>• Clear glass rear sliding doors w/o lock</div></div>	<div><div>• Reflective glass rear sliding doors w/o lock</div></div>
ELECTRICAL CONNECTION	<div><div>• 6' Straight blade power cord (self-cont.)</div></div>	<div><div>• 6' Locking power cord (self-cont.)</div></div>
MISCELLANEOUS		<div><div>• Rear door lock (for both sets of doors)</div><div>• Second year parts &amp; labor warranty (excludes compressor)</div></div>
ACCESSORIES		<div><div>• Display steps (n/a w/shelf)</div><div>• Night curtain, retractable, non-locking</div><div>• Removable wire security cover, locking</div></div>

**Intended Environment:** Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.

Zone	Intended Product To Be Displayed	Warmest Avg Prod Temp ° F
1	Packaged / unpackaged refrigerated products	40

PLAN VIEW

SIDE VIEW

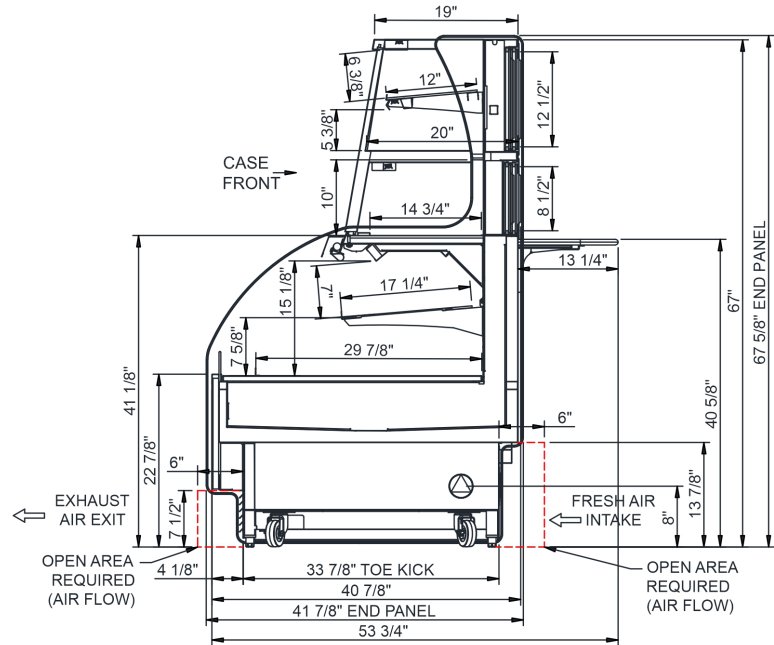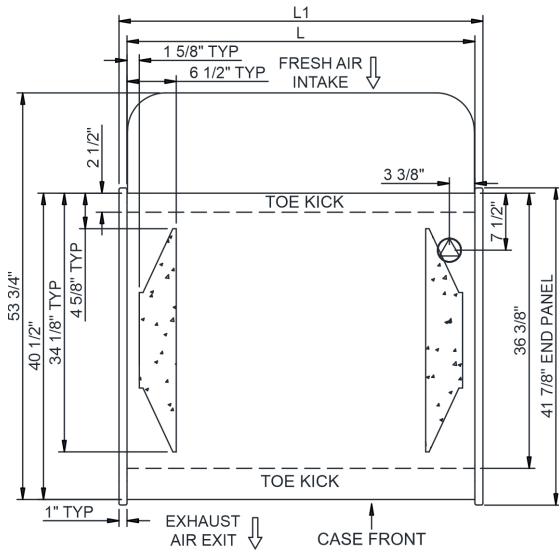

**NOTE: ALL DIMENSIONS APPROXIMATE**

⊕ ELECTRICAL JUNCTION BOX  
(SUPPLIED WITH 6\"

⊕ REFRIGERATION LINE CONNECTION.  
⊕ REMOTE FLOOR SINK & UTILITIES  
ACCESS AREA.

⊕ SELF-CONTAINED CASE SERVICE ACCESS AREA.  
⊕ DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications																
Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack BTU/H	Para. Rack BTU/H	Est Wt
C3Z3667	34.00	36.00	7.00	Self-Contained (R290)	Circuit #1	110-120	1	60	14.30	1,481	2+G	5-20P or L5-20P	N/A	N/A	N/A	900
C3Z4867	46.00	48.00	13.00	Self-Contained (R290)	Circuit #1	110-120	1	60	15.24	1,536	2+G	5-20P or L5-20P	N/A	N/A	N/A	1,000

\*\*\* Does not include electric defrost on freezer models.

Regulatory Approvals:	
All Models	Accordance with AHRI Std 1200 ETL Listed to UL 471 ETL Listed to CAN/CSA 22.2 No. 120 ETL Sanitation to NSF/ANSI 7



In Accordance with  
**AHRI Std 1200**

**DOE 2017**  
Energy Efficiency  
Compliant

### Important Notes:

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) 43" minimum door entry clearance required (without shipping skid).
- 3) Units are supplied with levelers. They must be adjusted during installation to ensure the unit is level and plumb. Dimensions reflect levelers extended 1 1/4". 4) Compressor air ventilation is out the front panel. Front panel cannot be blocked.

**⚠ WARNING:** This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).