

- **FB8SS-6H**
  - **FB10SS-8H**
- 95"L x 43"D x 55-1/2"H

125"L x 43"D x 55-1/2"H

Included

- Clear sneeze guard glass w/ stainless steel posts
- Holds full size 6"D pans (pans not included)
- One year parts & labor warranty
- Open rear storage
- Wells with individual temperature controls



FB8SS-6H

Specify	Standard Features	Additional Options
EXTERIOR COLOR	<ul style="list-style-type: none"><li>• Laminate (stock colors)</li></ul>	<ul style="list-style-type: none"><li>• Laminate (non-stock colors)</li><li>• Powder coated (stock/non-stock colors)</li><li>• Powder coated Silversan Black</li><li>• Stainless steel</li></ul>
LOWER FRONT PANEL COLOR	<ul style="list-style-type: none"><li>• Powder coated Silversan Black</li></ul>	<ul style="list-style-type: none"><li>• Powder coated (stock/non-stock colors)</li><li>• Stainless steel</li></ul>
LOWER FRONT PANEL HEIGHT	<ul style="list-style-type: none"><li>• 15-5/8" Lower front panel height</li></ul>	<ul style="list-style-type: none"><li>• 8-5/8" Lower front panel height</li></ul>
BASE SUPPORT	<ul style="list-style-type: none"><li>• Rail system for shims</li></ul>	
BUMPER FRONT	<ul style="list-style-type: none"><li>• None</li></ul>	<ul style="list-style-type: none"><li>• 1" Boston bumper (specify color)</li><li><sup>1</sup> • 1" Stainless steel plate rail bumper</li></ul>
COUNTERTOP SURFACE	<ul style="list-style-type: none"><li>• Stainless steel</li></ul>	<ul style="list-style-type: none"><li>• 3 cm. Quartz</li></ul>
REAR STORAGE	<ul style="list-style-type: none"><li>• Open rear storage</li></ul>	
SNEEZE GUARD	<ul style="list-style-type: none"><li>• Clear lift-up sneeze guard glass w/ stainless steel posts</li></ul>	
ELECTRICAL CONNECTION	<ul style="list-style-type: none"><li>• Electrical leads</li></ul>	
HEATED WELLS	<ul style="list-style-type: none"><li><sup>1</sup> • Steam heat with manual fill system</li></ul>	<ul style="list-style-type: none"><li>• Dry heat (no water required)</li><li><sup>2</sup> • Steam heat with autofill system</li></ul>
MISCELLANEOUS		<ul style="list-style-type: none"><li>• Second year parts &amp; labor warranty</li></ul>

Std Notes: 1 - Floor drain required

Option Notes: 1 - 8ft; 10ft;  
2 - Floor drain required

# Grocerant

Heated Self-Service Food Bar 43"D

Structural Concepts®



DELIVERING FRESH. ALWAYS.™

**Intended Environment:** Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.

Zone	Intended Product To Be Displayed	Warmest Avg Prod Temp ° F
1	Unpackaged heated product	160

PLAN VIEW

SIDE VIEW

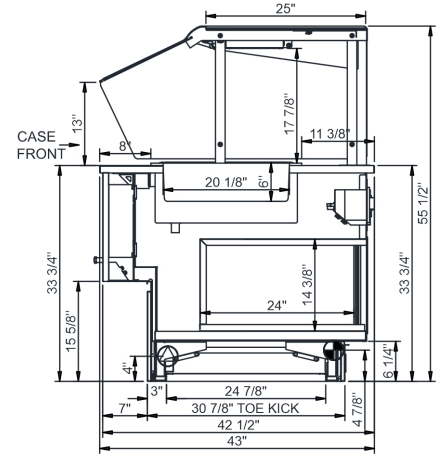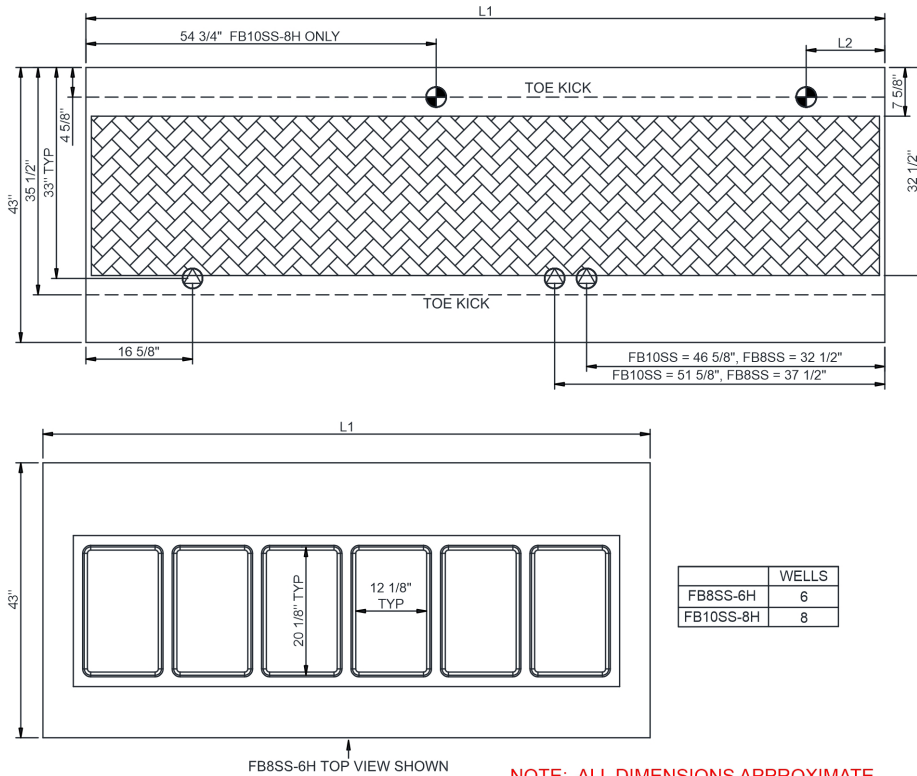

- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
- LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

- REFRIGERATION LINE CONNECTION.
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

- SELF-CONTAINED CASE SERVICE ACCESS AREA.
- DRY CASE SERVICE ACCESS AREA.

NOTE: ALL DIMENSIONS APPROXIMATE

Model Technical Specifications																
Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack BTUH	Para. Rack BTUH	Est Wt
FB8SS-6H	N/A	95.00	12.25	Heat (N/A)	Circuit #1	208	1	60	34.67	7,211	2+G	Leads Multiple	N/A	N/A	N/A	1,300
				Heat (N/A)	Circuit #3	208	1	60	22.56	4,450	2+G	Leads Multiple	N/A	N/A	N/A	
				Heat (N/A)	Circuit #1	208	1	60	5.80	1,207	2+G	Leads Multiple	N/A	N/A	N/A	
				Heat (N/A)	Circuit #2	208	1	60	5.80	1,207	2+G	Leads Multiple	N/A	N/A	N/A	
FB10SS-8H	N/A	125.00	12.25	Heat (N/A)	Circuit #1	208	1	60	23.06	4,797	2+G	Leads Multiple	N/A	N/A	N/A	1,500
				Heat (N/A)	Circuit #2	208	1	60	23.06	4,797	2+G	Leads Multiple	N/A	N/A	N/A	
				Heat (N/A)	Circuit #3	208	1	60	29.84	5,943	2+G	Leads Multiple	N/A	N/A	N/A	
				Heat (N/A)	Circuit #1	208	1	60	8.70	1,810	2+G	Leads Multiple	N/A	N/A	N/A	
				Heat (N/A)	Circuit #2	208	1	60	8.70	1,810	2+G	Leads Multiple	N/A	N/A	N/A	

\*\*\* Does not include electric defrost on freezer models.

## Regulatory Approvals:

All Models ETL Listed to UL 197  
ETL Listed to CAN/CSA 22.2 No. 109  
ETL Sanitation to NSF/ANSI 4



DOE 2017  
Energy Efficiency  
Compliant

## Important Notes:

- ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle.
- Units must be shimmed during installation to ensure the unit is level and plumb.
- Floor drain required for steam wells.
- Auto fill options use 1/2" water line.
- Manual fill and Auto fill options use 3/4" drain line.

**⚠ WARNING:** This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).