


• FSE663R 49-3/8"L x 73-3/8"D x 63-3/8"H

Included

- Remote DX refrigeration
- Electrical leads
- Full end panel w/mirror interior
- LED 4000K top light(s)
- Price tag molding (matches interior color)
- Removable deck pans provide complete access to evaporator coil & refrigeration connections
- Warmest average product temperature of 40°F or less

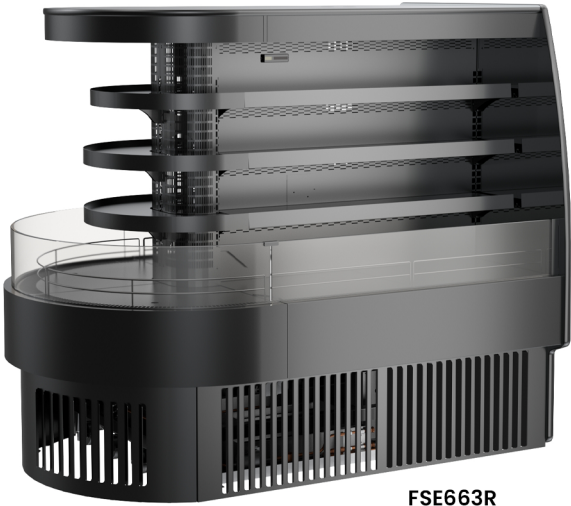


Specify	Standard Features	Additional Options
EXTERIOR COLOR	<ul style="list-style-type: none"><li>• Laminate (stock colors)</li></ul>	<ul style="list-style-type: none"><li>• Laminate (non-stock colors)</li><li>• Stainless steel</li></ul>
INTERIOR COLOR	<ul style="list-style-type: none"><li>• Powder coated Silversan Black</li></ul>	<ul style="list-style-type: none"><li>• Stainless steel</li></ul>
LOWER FRONT PANEL COLOR	<ul style="list-style-type: none"><li>• Powder coated Silversan Black</li></ul>	<ul style="list-style-type: none"><li>• Stainless steel (must choose stainless exterior)</li></ul>
BASE SUPPORT	<ul style="list-style-type: none"><li>• Levelers</li></ul>	
SHELVING	<ul style="list-style-type: none"><li>• Non-adjustable metal shelves, non-lighted</li></ul>	<ul style="list-style-type: none"><li>• Non-adjustable metal shelves, lighted (LED 4000K)</li></ul>
ELECTRICAL CONNECTION	<ul style="list-style-type: none"><li>• Electrical leads (remote)</li></ul>	
REFRIGERATION	<ul style="list-style-type: none"><li>• Remote w/thermostat, solenoid &amp; TXV</li></ul>	<ul style="list-style-type: none"><li>• Note: Remote doesn't incl Conds unit. Floor drain reqd.</li><li>• Remote w/thermostat, solenoid &amp; TXV</li></ul>
MISCELLANEOUS		<ul style="list-style-type: none"><li>• Second year parts &amp; labor warranty</li></ul>


**Intended Environment:** Type II - Designed to operate in ambient conditions of 80°F and 55% relative humidity unless noted otherwise in system information below.

Zone	Intended Product To Be Displayed	Warmest Avg Prod Temp ° F
1	Packaged refrigerated products	40


PLAN VIEW

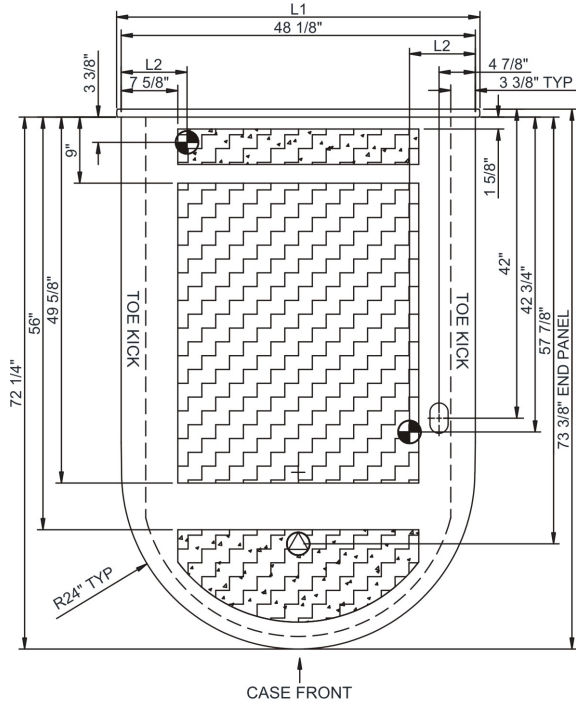

SIDE VIEW

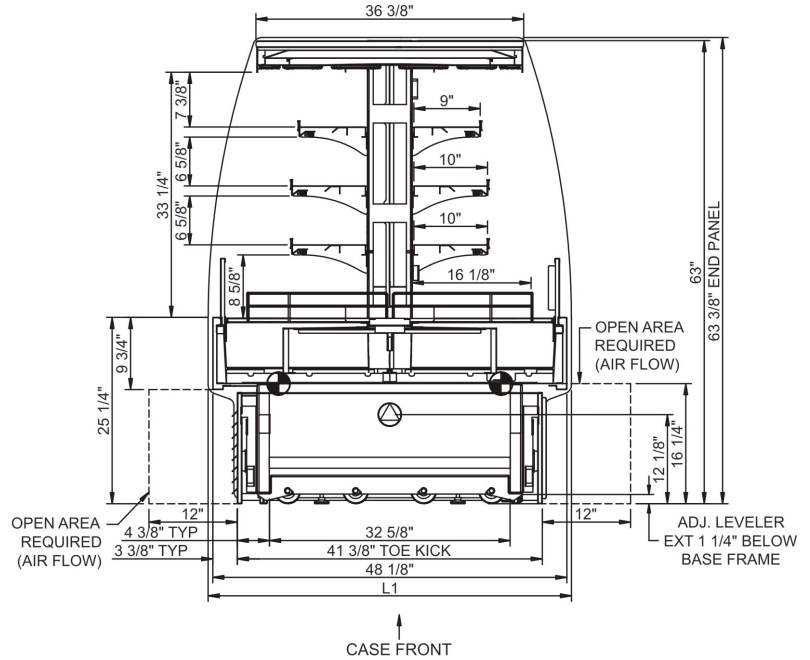

NOTE: ALL DIMENSIONS APPROXIMATE

 ELECTRICAL JUNCTION BOX  
(SUPPLIED WITH 6\"/>

 REFRIGERATION LINE CONNECTION.  
 REMOTE FLOOR SINK & UTILITIES  
ACCESS AREA.

 SELF-CONTAINED CASE SERVICE ACCESS AREA.  
 DRY CASE SERVICE ACCESS AREA.

## Model Technical Specifications

Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack BTU/H	Para. Rack BTU/H	Est Wt
FSE663R	N/A	49.38	9.00	Remote (DX)	Circuit #1	110-120	1	60	7.77	434	2+G	Leads Multiple	20.00	13997	12960	1,550

\*\*\* Does not include electric defrost on freezer models.

## Regulatory Approvals:

All Models  
Accordance with AHRI Std 1200  
ETL Listed to UL 471  
ETL Listed to CAN/CSA 22.2 No. 120  
ETL Sanitation to NSF/ANSI 7



In Accordance with  
AHRI Std 1200

DOE 2017  
Energy Efficiency  
Compliant

## Important Notes:

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) Compressor air side intake and side discharge
- 3) 50" minimum door entry clearance required (without shipping skid).
- 4) Performance issues (product temperatures, water on floor, etc.) caused by adverse conditions are not covered by warranty.
- 5) Keep unit at least 15' from exterior doors, overhead HVAC vents, or any air curtain disruption.
- 6) End panels must be tightly joined or kept at least 6" away from any structure to prevent condensation.
- 7) Do not expose unit to direct sunlight or any heat source (ovens, fryers, etc.).

**⚠ WARNING:** This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).