

• **BD3632DSIS** 36-3/8"L x 32-1/4"D x 82-5/8"H

- Included**
- NOTE: Must be paired w/ a standalone unit equipped w/ E-Box (Max (1) satellite unit per standalone unit)
 - (5) Display levels with (4) trays on each level
 - Clear glass swinging door w/ left hinge (self-closing)
 - LED 4000K top & shelf lights
 - One piece formed ABS plastic tub
 - One year parts & labor warranty
 - Shelving removable and adjustable on 1" centers




BD3632DSIS

Specify	Standard Features	Additional Options
EXTERIOR COLOR	• Powder coated Silversan Black	
INTERIOR COLOR	• Powder coated Silversan Black	
BASE SUPPORT	• Casters w/ levelers	• Seismic levelers
END PANELS	• Full w/stainless steel mirror interior	
FRONT DOORS	• Clear glass swinging door w/ left hinge (self-closing)	
SHELVING	• Metal shelves (5), lighted (LED)	
LIGHTS	• LED 4000K top & shelf lights	
E-BOX LOCATION	• None	
ELECTRICAL CONNECTION	• 6' GFCI straight blade power cord (base exit)	• 6' GFCI locking blade power cord (base exit)
MISCELLANEOUS		• Second year parts & labor warranty

Intended Environment: Type II - Designed to operate in ambient conditions of 80°F and 55% relative humidity unless noted otherwise in system information below.


Zone	Intended Product To Be Displayed	Warmest Avg Prod Temp ° F
1	Packaged non-refrigerated products	Ambient

PLAN VIEW

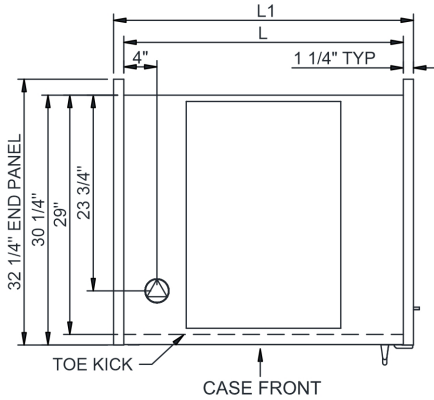


NOTE:

1. SHELF TRAY DIMENSIONS: 7 1/4" W X 18 1/4" D

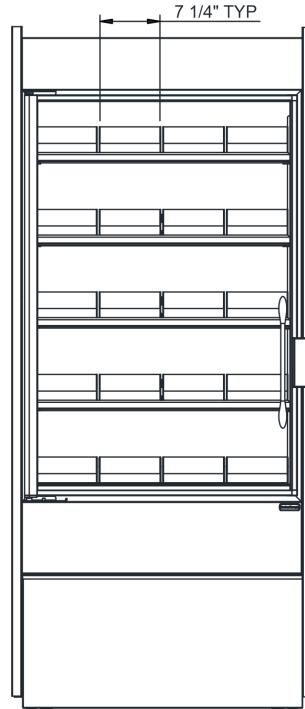

FRONT VIEW

SIDE VIEW

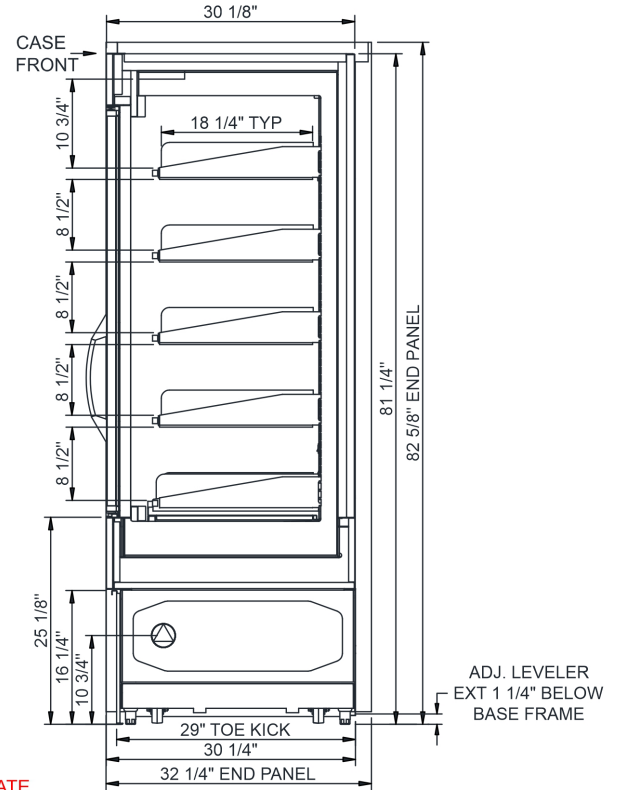

NOTE: ALL DIMENSIONS APPROXIMATE

- ⊗ ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
 ⊙ LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

- ⊕ REFRIGERATION LINE CONNECTION.
 Ⓜ REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

- ⊞ SELF-CONTAINED CASE SERVICE ACCESS AREA.
 ⊞ DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications

Model Technical Specifications																
Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack RTU/H	Para. Rack RTU/H	Est Wt
BD3632DSIS	33.88	36.38	.00	Ambient/Lights (N/A)	Circuit #1	110-120	1	60	1.70	68	2+G	5-15P or L5-15P	N/A	N/A	N/A	680

*** Does not include electric defrost on freezer models.

Regulatory Approvals:

All Models	ETL Listed to UL 751 ETL Listed to CAN/CSA 22.2 No. 128 ETL Sanitation to NSF/ANSI 25
------------	---



Important Notes:

- 1) Must be paired w/ a standalone unit equipped w/ E-Box (Max (1) satellite unit per standalone unit).

⚠ WARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.