Technical Information

ARM - Dry Autonomous Retail Merchandiser - XL

Structural Concepts®
DELIVERING FRESH. ALWAYS.™

DIMENSIONS / SHIPPING

Model	L"	L1"	L2"	Est Wt (lbs)
BD3632DIS	N/A	45.375	0.000	1,180

ELECTRICAL

Model	System Circuit Volts			Ph	Frq	Rated Load Amps	Min Cir Amps	Max OCP Amps	Watts	Wires	NEMA Plug	Amps Lights	Amps Fans	Amps Anti-Sweats	Amps Misc/Refrig/ Heat
BD3632DIS	Ambient/Lights (N/A)	Circuit #1	110-120	1	60	1.70	15	15	68	2+G	5-15P or L5-15P	N/A	N/A	N/A	1.70

REFRIGERATION

Model	Zone	Section	System	Envt	REMOTE REFRIGERATION					GLYCOL / R744 REFRIGERATION			
					SST (°F)	Conv. Rack BTUH	Para. Rack BTUH	Defrost Interval (Hrs)	Defrost Duration	Total GPM	Pressure Drop (psi)	Concent (%)	Liquid Temp (°F)
BD3632DIS	All	Ambient	Ambient/Lights-N/A	Type II	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

INTENDED ENVIRONMENT

Type II - Designed to operate in ambient conditions of 80°F and 55% relative humidity unless noted otherwise under Envt above.

WARMEST AVERAGE PRODUCT TEMP & INTENDED USE OF ZONES

Zone	Temp (°F)	Intended Use
1		Packaged non-refrigerated products

IMPORTANT NOTES

1) ARM Form required at time of PO for this standalone unit w/ E-Box.
2) Temperatures inside display will be at least 10(d) warmer than outside ambient environment. Products prone to melting should be avoided.


REGULATORY

All Models	ETL Listed to UL 751 ETL Listed to CAN/CSA 22.2 No. 128 ETL Sanitation to NSF/ANSI 25


Technical Information


ARM - Dry Autonomous Retail Merchandiser - XL

Structural Concepts®
DELIVERING FRESH. ALWAYS.™

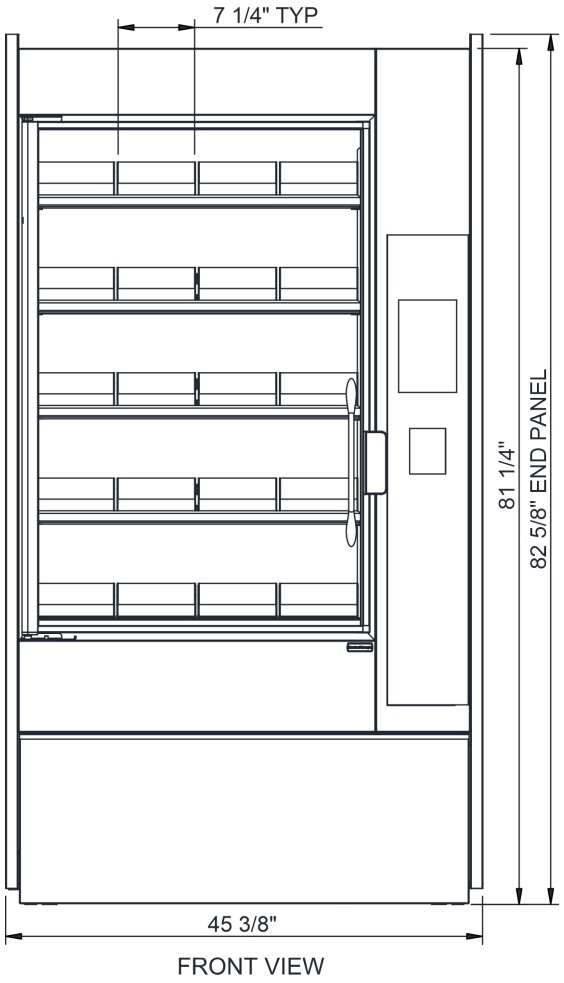

FRONT VIEW

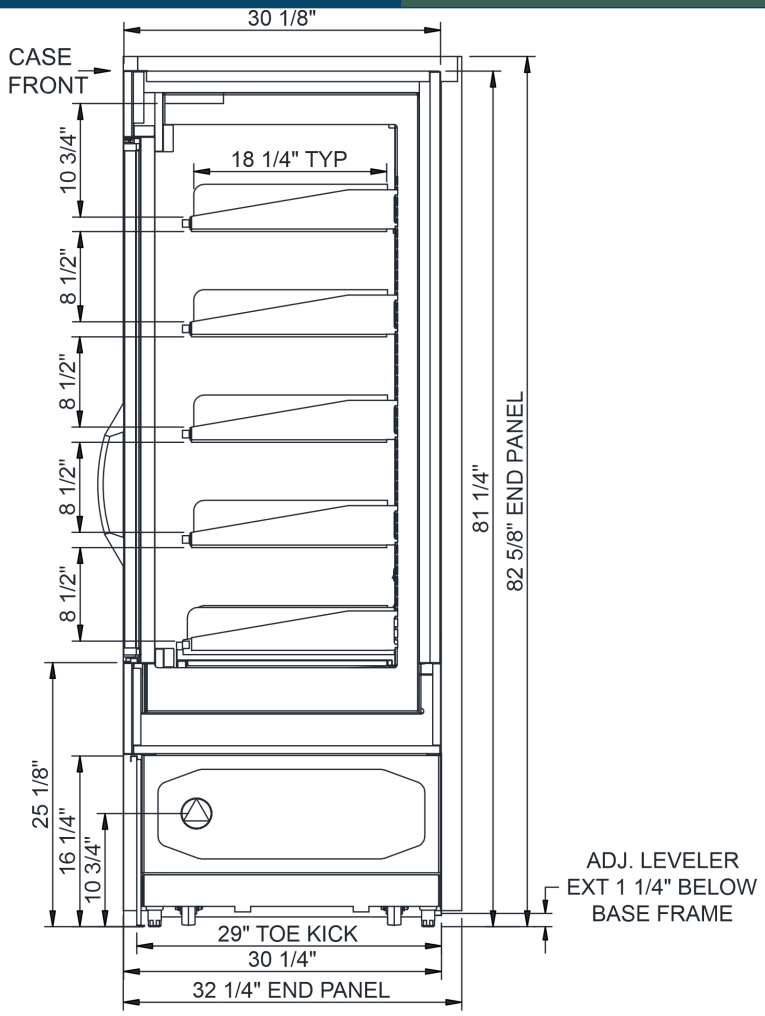

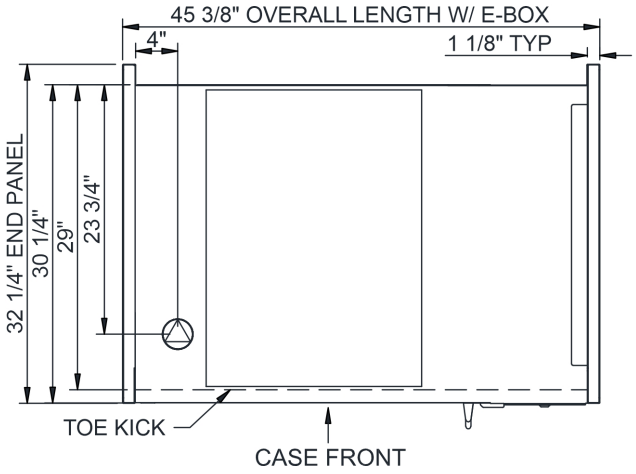

NOTE:
1. SHELF TRAY DIMENSIONS: 7 1/4" W X 18 1/4" D

NOTE: ALL DIMENSIONS APPROXIMATE

- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
- LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH $\frac{3}{4}$" OR $1\frac{1}{2}$" PVC TUBE).
- REFRIGERATION LINE CONNECTION.
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.
- SELF-CONTAINED CASE SERVICE ACCESS AREA.
- DRY CASE SERVICE ACCESS AREA.