

- B37D

35-5/8"L x 34-1/4"D x 82-1/4"H
- B47D

47-5/8"L x 34-1/4"D x 82-1/4"H

Included

- Casters (non-locking) w/ levelers
- One piece formed ABS plastic tub
- One year parts & labor warranty
- Rear wall spacer (removable to fit through door opening)
- Top light (LED 4000K)



B37D


Specify	Standard Features	Additional Options
EXTERIOR COLOR	<ul style="list-style-type: none">• Powder coated Silversan Black	<ul style="list-style-type: none">• Laminate (stock/non-stock colors)• Powder coated (stock/non-stock colors)• Stainless steel
INTERIOR COLOR	<ul style="list-style-type: none">• Powder coated Silversan Black	<ul style="list-style-type: none">• Stainless steel
LOWER FRONT PANEL COLOR	<ul style="list-style-type: none">• Powder coated Silversan Black	<ul style="list-style-type: none">• Stainless steel (must choose stainless exterior)
REAR EXTERIOR COLOR	<ul style="list-style-type: none">• Powder coated Silversan Black	<ul style="list-style-type: none">• Stainless steel
BASE SUPPORT	<ul style="list-style-type: none">• Casters (non-locking) w/ levelers	
END PANELS	<ul style="list-style-type: none">• Full w/stainless steel mirror interior	<ul style="list-style-type: none">• Cutaway w/ glass• None (synchronized defrost required)
COVER/CURTAIN	<ul style="list-style-type: none">• None	<ul style="list-style-type: none">1 • Night curtain, retractable, non-locking• Removable solid security cover, locking• Roll-down security cover, locking
PRICE TAG MOLDING	<ul style="list-style-type: none">• None	<ul style="list-style-type: none">• Universal price tag molding (clear w/ open top)
REAR DOORS	<ul style="list-style-type: none">• None (solid back panel)	<ul style="list-style-type: none">• Rear loading hinged doors, locking
SHELVING	<ul style="list-style-type: none">• Metal shelves (4), non-lighted	<ul style="list-style-type: none">• Metal shelves (4), lighted (LED 4000K)
ELECTRICAL CONNECTION	<ul style="list-style-type: none">• 6' Straight blade power cord	
MISCELLANEOUS		<ul style="list-style-type: none">• Second year parts & labor warranty

Option Notes: 1 - One cover/curtain type per model


Intended Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.

Zone	Intended Product To Be Displayed	Warmest Avg Prod Temp ° F
1	Packaged non-refrigerated products	Ambient

PLAN VIEW

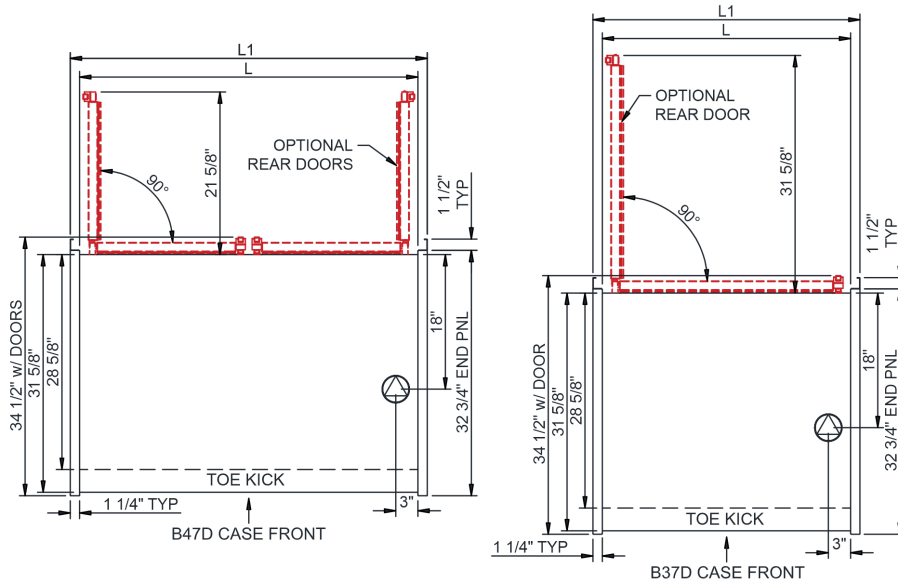

SIDE VIEW

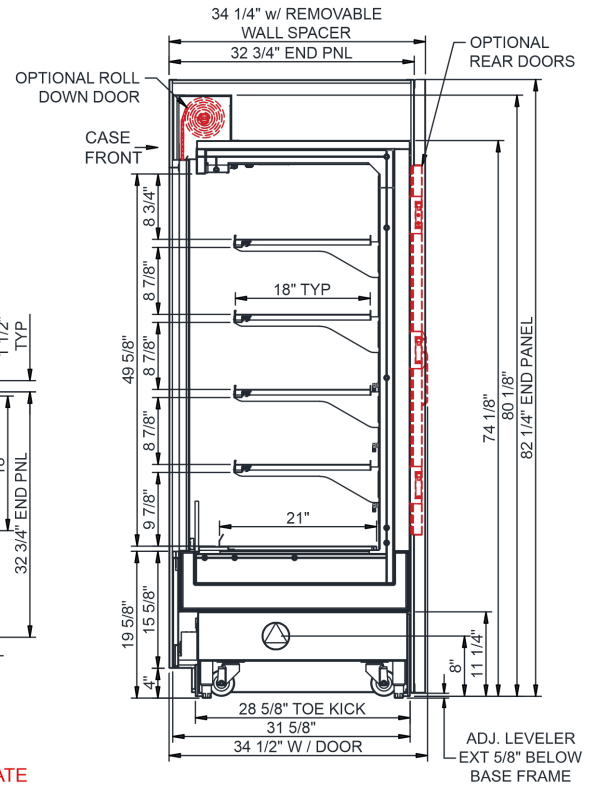

NOTE: ALL DIMENSIONS APPROXIMATE

⊕ ELECTRICAL JUNCTION BOX
(SUPPLIED WITH 6" LEADS OR POWER CORD).
⦿ LOCATION OF DRAIN TUBE FOR REMOTE REF.
ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

⊕ REFRIGERATION LINE CONNECTION.
⦿ REMOTE FLOOR SINK & UTILITIES
ACCESS AREA.

⦿ SELF-CONTAINED CASE SERVICE ACCESS AREA.
⦿ DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications																
Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack BTU/H	Para. Rack BTU/H	Est Wt
B37D	33.13	35.63	.00	Ambient/Lights (N/A)	Circuit #1	110-120	1	60	1.12	46	2+G	5-15P or L5-15P	N/A	N/A	N/A	650
B47D	45.13	47.63	.00	Ambient/Lights (N/A)	Circuit #1	110-120	1	60	1.12	65	2+G	5-15P or L5-15P	N/A	N/A	N/A	750

*** Does not include electric defrost on freezer models.

Regulatory Approvals:

None



Important Notes:

- 1) Performance issues (product temperatures, water on floor, etc.) caused by adverse conditions are not covered by warranty.
- 2) Do not expose unit to direct sunlight or any heat source (ovens, fryers, etc.).
- 3) If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle.

⚠ WARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.