

- MI44RF

52-1/4"L x 45-3/4"D x 40-5/8"H
- MI46RF

75"L x 45-3/4"D x 40-5/8"H
- MI48RF

97-3/4"L x 45-3/4"D x 40-5/8"H

Included

- Breeze self-contained refrigeration
- Adjustable wire rack deck
- Casters
- One year parts & labor; 5 year compressor warranty
- Removable deck pans provide complete access to evaporator coil & refrigeration connections
- Straight insulated glass ends
- Warmest average product temperature adjustable from 0°F to 40°F.  
Low temp for frozen (excluding ice cream) (0°F), Medium temp for raw meat (38°F), Medium temp for produce/deli (40°F)




MI46RF

Specify	Standard Features	Additional Options
EXTERIOR COLOR	<div><div>• Powder coated Silversan Black</div></div>	<div><div>• Laminate (non-stock colors)</div><div>• Laminate (stock colors)</div><div>• Powder coated (stock colors, specify RAL#)</div><div>• Stainless steel</div></div>
INTERIOR COLOR	<div><div>• Powder coated Silversan Black</div></div>	<div><div>• Powder coated Designer White</div><div>• Stainless steel</div></div>
BASE	<div><div>• Powder coated Silversan Black</div></div>	<div><div>• Stainless steel (must choose stainless exterior)</div></div>
BUMPER	<div><div>• 1" bumper, double strip (specify color)</div></div>	
ELECTRICAL CONNECTION	<div><div>• 6' 90° Straight blade power cord (self-cont.)</div></div>	<div><div>• 6' Locking power cord (self-cont.)</div></div>
EVAPORATOR COIL	<div><div>• Non-coated evaporator coil</div></div>	<div><div>• E-Coated evaporator coil</div></div>
THERMOMETER	<div><div>• Digital fahrenheit thermometer</div></div>	<div><div>• Digital celsius thermometer</div></div>
MISCELLANEOUS		<div><div>• Second year parts &amp; labor warranty (excludes compressor)</div></div>


**Intended Environment:** Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.

Zone	Intended Product To Be Displayed	Warmest Avg Prod Temp ° F
1	Packaged frozen (0°) Packaged raw meat (38°) Packaged produce/deli (40°)	0-38-40

**PLAN VIEW**

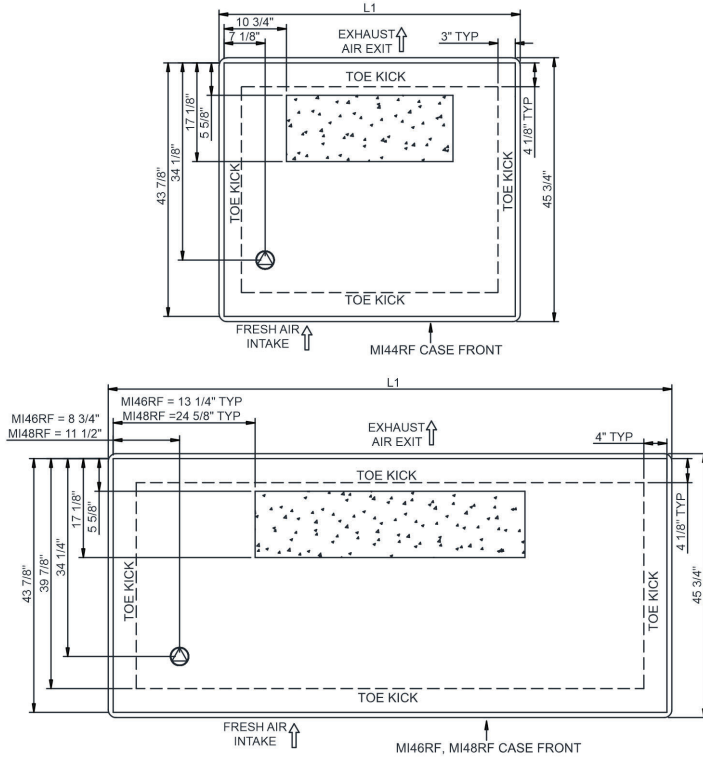

**SIDE VIEW**

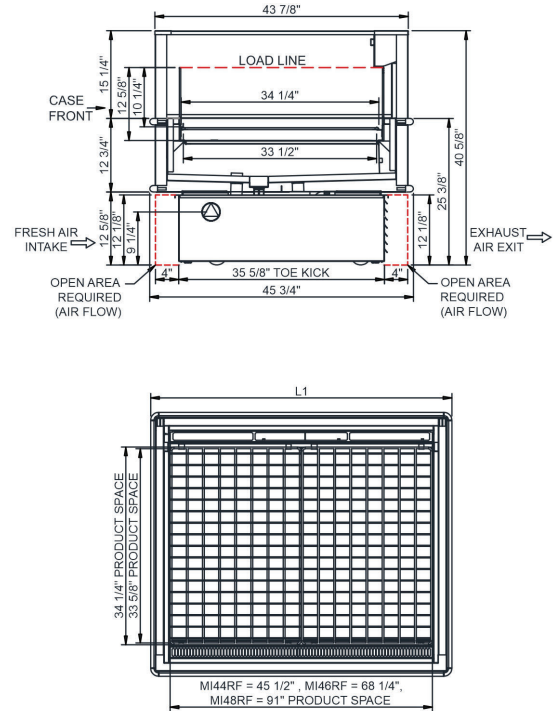

**NOTE: ALL DIMENSIONS APPROXIMATE**

- ELECTRICAL JUNCTION BOX**  
(SUPPLIED WITH 6" LEADS OR POWER CORD).
- LOCATION OF DRAIN TUBE FOR REMOTE REF.**  
ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

- REFRIGERATION LINE CONNECTION.**
- REMOTE FLOOR SINK & UTILITIES**  
ACCESS AREA.

- SELF-CONTAINED CASE SERVICE ACCESS AREA.**
- DRY CASE SERVICE ACCESS AREA.**

**Model Technical Specifications**

Model	L"	L1"	L2"	System Circuit Volts	Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack BTUH	Para. Rack BTUH	Est Wt
MI44RF	N/A	52.25	.00	Self-Contained (R290)			CONTACT FACTORY				N/A	N/A	N/A	900
MI46RF	N/A	75.00	.00	Self-Contained (R290)			CONTACT FACTORY				N/A	N/A	N/A	1,150
MI48RF	N/A	97.75	.00	Self-Contained (R290)			CONTACT FACTORY				N/A	N/A	N/A	1,500

\*\*\* Does not include electric defrost on freezer models.

**Regulatory Approvals:**

All Models  
 Accordance with AHRI Std 1200  
 ETL Listed to UL 471  
 ETL Listed to CAN/CSA 22.2 No. 120  
 ETL Sanitation to NSF/ANSI 7



In Accordance with  
**AHRI Std 1200**

**DOE 2017**  
Energy Efficiency  
Compliant

**Important Notes:**

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) Maximum load height is 8-1/4" up from deck.
- 3) Compressor air side intake and side discharge. All louvered panels cannot be blocked

**⚠ WARNING:** This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).