

Technical Information

Oasis - Refrigerated Self-Service Multi-Purpose Island - 3' Case Depth - Disc'd Group

DIMENSIONS / SHIPPING				
Model	L"	L1"	L2"	Est Wt (lbs)
MI32R	N/A	26.125	7.000	N/A

ELECTRICAL															
Model	System Circuit Volts			Ph	Frq	Rated Load Amps	Min Cir Amps	Max OCP Amps	Watts	Wires	NEMA Plug	Amps Lights	Amps Fans	Amps Anti-Sweats	Amps Misc/Refrig/Heat
M32R	Self-Contained (R513A)	Circuit #1	110-120	1	60	11.04	15	15	1,014	N/A	5-15P or L5-15P	N/A	0.60	0.24	10.20

REFRIGERATION													
Model	Zone	Section	System	Envt	REMOTE REFRIGERATION					GLYCOL / R744 REFRIGERATION			
					SST (°F)	Conv. Rack BTUH	Para. Rack BTUH	Defrost Interval (Hrs)	Defrost Duration	Total GPM	Pressure Drop (psi)	Concent (%)	Liquid Temp (°F)
M132R	All	Main	Self-Contained-R513A	Type I	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

INTENDED ENVIRONMENT		
Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise under Envt above.		
WARMEST AVERAGE PRODUCT TEMP & INTENDED USE OF ZONES		
Zone	Temp (°F)	Intended Use
1	38-40	Packaged raw meat (38°) Packaged produce/deli (40°)

REGULATORY	
All Models	Accordance with AHRI Std 1200 ETL Listed to UL 471 ETL Listed to CAN/CSA 22.2 No. 120 ETL Sanitation to NSF/ANSI 7

IMPORTANT NOTES													
1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle													
2) Maximum load height is 8-1/4" up from deck.													
3) Compressor air side intake and side discharge. All louvered panels cannot be blocked.													







In Accordance with
AHRI Std 1200

Technical Information

Oasis - Refrigerated Self-Service Multi-Purpose Island - 3' Case Depth - Disc'd Group

Structural Concepts®

DELIVERING FRESH. ALWAYS.™

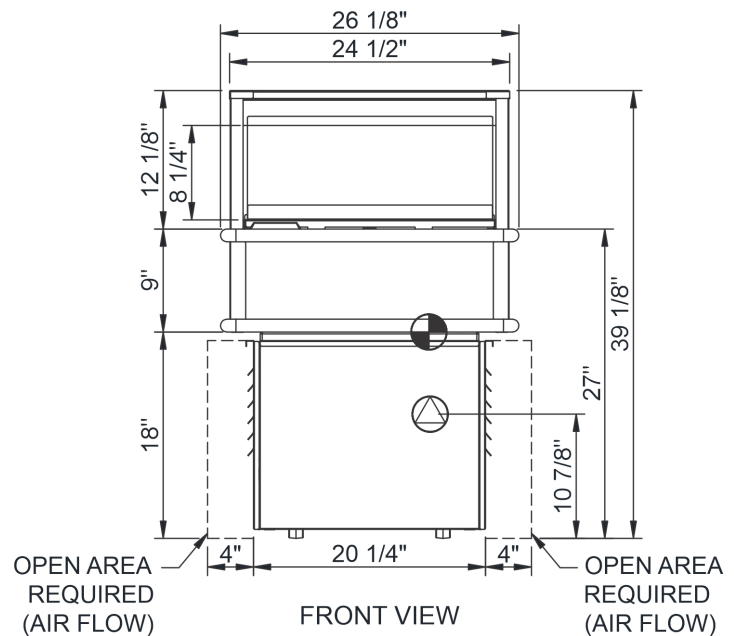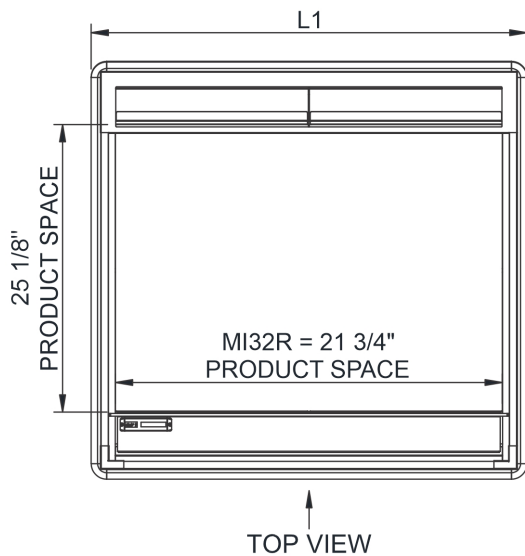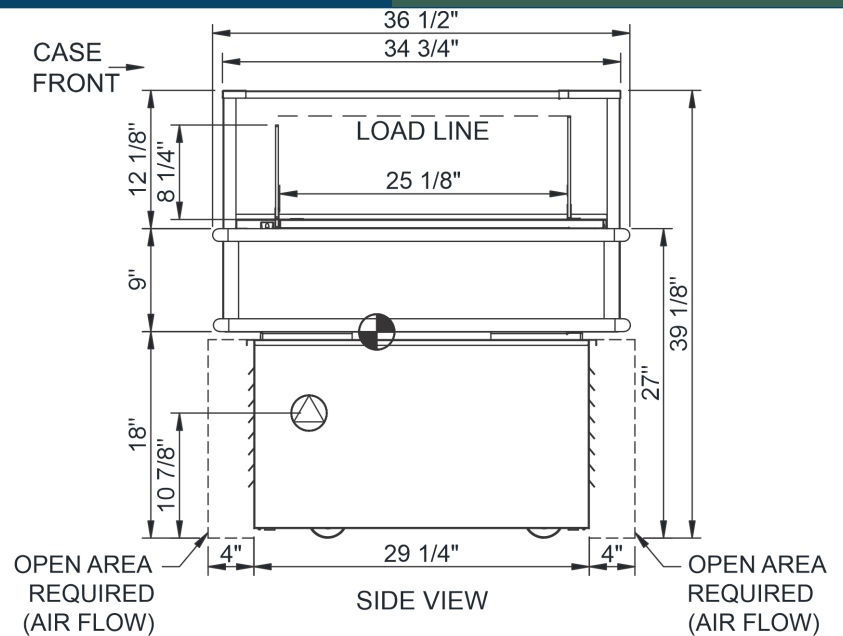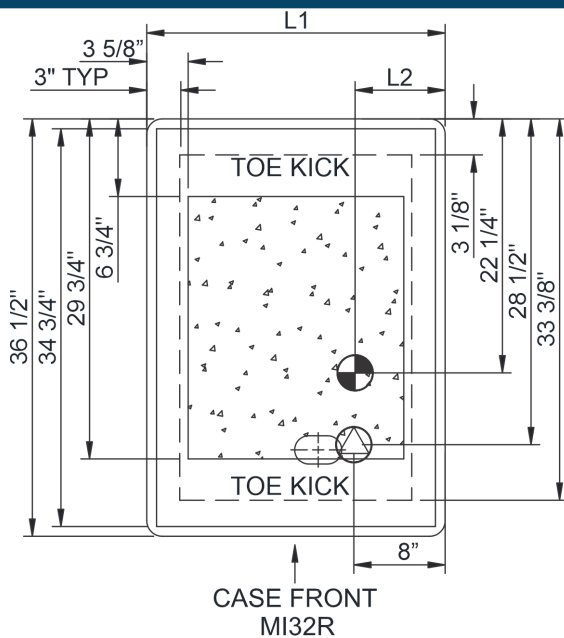

NOTE: ALL DIMENSIONS APPROXIMATE

