

# Oasis

Refrigerated Self-Service Multi-Purpose Island - 4' Case Depth

**Structural Concepts®**  
DELIVERING FRESH. ALWAYS.™

- **MI44R** 50-1/8"L x 48-1/2"D x 39-1/8"H
- **MI46R** 74-1/8"L x 48-1/2"D x 39-1/8"H
- **MI48R** 98-1/8"L x 48-1/2"D x 39-1/8"H

## Included

- Breeze self-contained refrigeration
- Casters (locking)
- One piece formed ABS plastic tub
- One year parts & labor; 5 year compressor warranty
- Solid metal deck
- Straight insulated glass ends
- Warmest average product temperature adjustable from 38°F to 40°F






Specify	Standard Features	Additional Options
<b>EXTERIOR COLOR</b>	• Powder coated Silversan Black	• Laminate (non-stock colors) • Laminate (stock colors) • Powder coated (stock colors, specify RAL#) • Stainless steel
<b>INTERIOR COLOR</b>	• Powder coated Silversan Black	• Stainless steel
<b>LOWER PANEL COLOR</b>	• Powder coated Silversan Black	• Stainless steel (must choose stainless exterior)
<b>BASE SUPPORT</b>	• Enclosed base with locking casters	
<b>BUMPER</b>	• 1" bumper, double strip (black)	
<b>ELECTRICAL CONNECTION</b>	• 6' 90° Straight blade power cord (self-cont.)	• 6' Locking power cord (self-cont.)
<b>CLEAN SWEEP</b>	• None	• Clean Sweep® automatic condenser coil cleaner
<b>REFRIGERATION</b>	• Breeze self-contained refrigeration	
<b>THERMOMETER</b>	• Digital fahrenheit thermometer	• Digital celsius thermometer
<b>MISCELLANEOUS</b>		• Second year parts & labor warranty (excludes compressor)
<b>ACCESSORIES</b>		• Electrical drop cord cover (matches exterior color)

**Intended Environment:** Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.

Zone	Intended Product To Be Displayed	Warmest Avg Prod Temp ° F
1	Packaged raw meat (38°) Packaged produce/deli (40°)	38-40

PLAN VIEW

SIDE VIEW

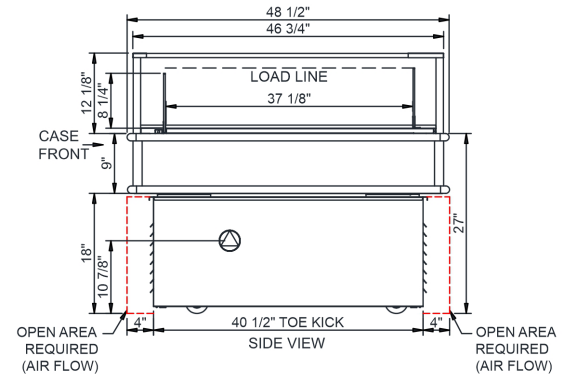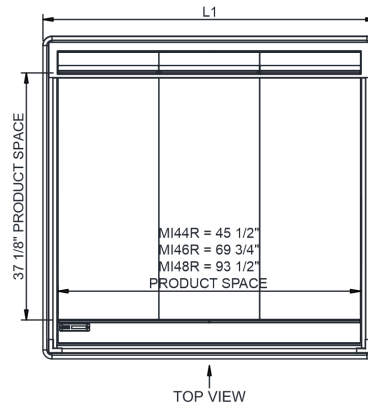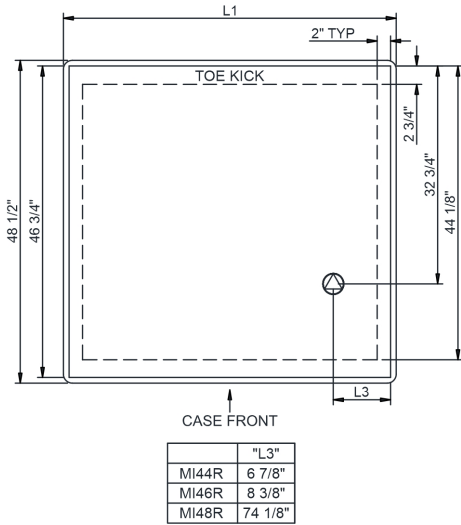

NOTE: ALL DIMENSIONS APPROXIMATE

ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).  
 LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

REFRIGERATION LINE CONNECTION.  
 REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

SELF-CONTAINED CASE SERVICE ACCESS AREA.  
 DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications																
Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack BTUH	Para. Rack BTUH	Est Wt
MI44R	N/A	50.13	.00	Self-Contained (R290)	Circuit #1	110-120	1	60	14.28	1,514	2+G	5-20P or L5-20P	N/A	N/A	N/A	850
MI46R	N/A	74.13	.00	Self-Contained (R290)	Circuit #1	208-240	1	60	16.00	2,795	2+G	6-20P or L6-20P	N/A	N/A	N/A	1,100
MI48R	N/A	98.13	.00	Self-Contained (R290)	Circuit #1	208-240	1	60	16.00	2,817	2+G	6-20P or L6-20P	N/A	N/A	N/A	1,200

\*\*\* Does not include electric defrost on freezer models.

### Regulatory Approvals:

All Models  
 Accordance with AHRI Std 1200  
 ETL Listed to UL 471 & UL 60335-2-89  
 ETL Listed to CAN/CSA 22.2 No. 120  
 ETL Sanitation to NSF/ANSI 7



In Accordance with  
**AHRI Std 1200**

**DOE 2017**  
 Energy Efficiency  
 Compliant

### Important Notes:

- 1) Performance issues (product temperatures, water on floor, etc.) caused by adverse conditions are not covered by warranty.
- 2) Maximum load height is 8-1/4" up from deck.
- 3) Compressor air side intake and side discharge. All louvered panels cannot be blocked.
- 4) Do not expose unit to direct sunlight or any heat source (ovens, fryers, etc.).
- 5) Keep unit at least 15' from exterior doors, 10' from overhead HVAC vents, 5' from exterior windows.
- 6) If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle.

**⚠ WARNING:** This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).