Technical Information

Reveal® - Refrigerated Service Slide In Counter Case

Structural Concepts®
DELIVERING FRESH. ALWAYS.™

DIMENSIONS / SHIPPING

Model	L"	L1"	L2"	Est Wt (lbs)
NE3627RSV	N/A	35.750	7.500	750
NE4827RSV	N/A	47.750	7.500	850
NE6027RSV	N/A	59.750	7.500	950
NE7227RSV	N/A	71.750	7.500	1,050

ELECTRICAL

Model	System Circuit Volts			Ph	Frq	Rated Load Amps	Min Cir Amps	Max OCP Amps	Watts	Wires	NEMA Plug	Amps Lights	Amps Fans	Amps Anti-Sweats	Amps Misc/Refrig/ Heat
NE3627RSV	Remote (DX)	Circuit #1	110-120	1	60	1.08	15	15	35	2+G	Leads Single	0.70	0.30		0.08
	Remote (DX)	Circuit #1	110-120	1	60	1.08	15	15	35	2+G	Leads Single	0.70	0.30		0.08
	Self-Contained (R290)	Circuit #1	110-120	1	60	10.73	15	15	959	2+G	5-15P or L5-15P	N/A	0.45	3.96	6.32
NE4827RSV	Remote (DX)	Circuit #1	110-120	1	60	1.08	15	15	39	2+G	Leads Single	0.70	0.30		0.08
	Remote (DX)	Circuit #1	110-120	1	60	1.08	15	15	39	2+G	Leads Single	0.70	0.30		0.08
	Self-Contained (R290)	Circuit #1	110-120	1	60	11.18	15	15	987	2+G	5-15P or L5-15P	N/A	0.90	3.96	6.32
NE6027RSV	Remote (DX)	Circuit #1	110-120	1	60	1.38	15	15	58	2+G	Leads Single	0.70	0.60		0.08
	Remote (DX)	Circuit #1	110-120	1	60	1.38	15	15	58	2+G	Leads Single	0.70	0.60		0.08
	Self-Contained (R290)	Circuit #1	110-120	1	60	11.18	15	15	994	2+G	5-15P or L5-15P	N/A	0.90	3.96	6.32
NE7227RSV	Remote (DX)	Circuit #1	110-120	1	60	1.38	15	15	62	2+G	Leads Single	0.70	0.60		0.08
	Remote (DX)	Circuit #1	110-120	1	60	1.38	15	15	62	2+G	Leads Single	0.70	0.60		0.08
	Self-Contained (R290)	Circuit #1	110-120	1	60	15.48	20	20	1,529	2+G	5-20P or L5-20P	N/A	0.90	3.96	10.62

REFRIGERATION

Model	Zone	Section	System	Envt	REMOTE REFRIGERATION					GLYCOL / R744 REFRIGERATION			
					SST (°F)	Conv. Rack BTUH	Para. Rack BTUH	Defrost Interval (Hrs)	Defrost Duration	Total GPM	Pressure Drop (psi)	Concent (%)	Liquid Temp (°F)
NE3627RSV	All	Refrigerator	Remote-DX	Type II	24	1,015	940	4.00	30.00	N/A	N/A	N/A	N/A
	All	Refrigerator	Remote-DX	Type I	24	907	840	4.00	30.00	N/A	N/A	N/A	N/A
	All	Main	Self-Contained-R290	Type II	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
NE4827RSV	All	Refrigerator	Remote-DX	Type II	24	1,318	1,220	4.00	30.00	N/A	N/A	N/A	N/A
	All	Refrigerator	Remote-DX	Type I	24	1,166	1,080	4.00	30.00	N/A	N/A	N/A	N/A
	All	Main	Self-Contained-R290	Type II	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
NE6027RSV	All	Refrigerator	Remote-DX	Type II	20	1,620	1,500	4.00	25.00	N/A	N/A	N/A	N/A
	All	Refrigerator	Remote-DX	Type I	20	1,447	1,340	4.00	25.00	N/A	N/A	N/A	N/A
	All	Main	Self-Contained-R290	Type II	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
NE7227RSV	All	Refrigerator	Remote-DX	Type II	20	1,922	1,780	4.00	25.00	N/A	N/A	N/A	N/A
	All	Refrigerator	Remote-DX	Type I	20	1,706	1,580	4.00	25.00	N/A	N/A	N/A	N/A
	All	Main	Self-Contained-R290	Type II	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

INTENDED ENVIRONMENT

Type II - Designed to operate in ambient conditions of 80°F and 55% relative humidity unless noted otherwise under Envt above.

WARMEST AVERAGE PRODUCT TEMP & INTENDED USE OF ZONES

Zone	Temp (°F)	Intended Use
1	40	Unpackaged refrigerated products-Prechilled to Warmest Avg Prod Temp.

IMPORTANT NOTES

1) REMOTE REFRIGERATION NOTE: Condensing unit not included, floor drain required.
2) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
3) Back side of counter must be open or vented the full length of the unit to allow proper ventilation for the refrigeration system.
4) A vent in the front of the counter recommended to help dissipate compressor heat.
5) Rear Access - Counter must be configured to allow air to be drawn in the rear and discharged out the front.
6) Front Access - Counter must be configured to allow air to be drawn in the front and discharged out the rear.
7) 19.25" minimum space required beneath counter surface.
8) Glass warranty only applicable to first point of delivery.

REGULATORY	
All Models	Accordance with AHRI Std 1200 ETL Listed to UL 471 ETL Listed to CAN/CSA 22.2 No. 120 ETL Sanitation to NSF/ANSI 7

In Accordance with
AHRI Std 1200

NOTE: ALL DIMENSIONS APPROXIMATE

ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).

LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH $\frac{3}{4}$" OR $1\frac{1}{2}$" PVC TUBE).

REFRIGERATION LINE CONNECTION.

REMOTE FLOOR SINK & UTILITIES ACCESS AREA.


SELF-CONTAINED CASE SERVICE ACCESS AREA.

DRY CASE SERVICE ACCESS AREA.


Technical Information

Reveal® - Refrigerated Service Slide In Counter Case

Structural Concepts®
DELIVERING FRESH. ALWAYS.™

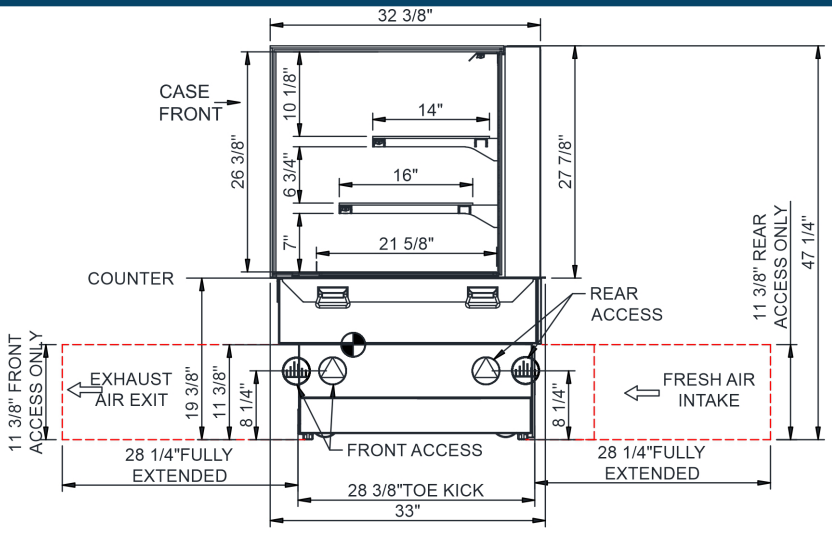


NOTES:
1. 11 3/8" TALL, FULL WIDTH OF CASE OPENING IN CABINET OR COUNTER IS REQUIRED TO PULL OUT REFRIGERATION SYSTEM.
2. SEE DESIGN GUIDE FOR CUTOUT SIZE IN CABINET FOR CASE TO DROP INTO.
3. BACK OF COUNTER / CABINET MUST BE VENTED PROPERLY FOR ADEQUATE AIRFLOW TO CONDENSER.
4. **REPRESENTS REAR PULLOUT REFRIGERATION. AIR FLOW INTAKE AND EXIT DETAILS ARE REVERSED WITH FRONT PULLOUT REFRIGERATION OPTION.
5. SELF-CONTAINED ACCESS ONLY BY PULLING OUT CONDENSER UNIT.
6. SEE "COUNTER INSTALLATION GUIDE" FOR AIR FLOW REQUIREMENTS.

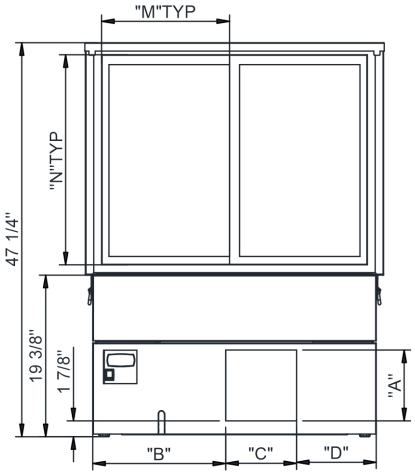

REAR VIEW

	"A"	"B"	"C"	"D"
NE3627RSV	8 1/2"	16"	8 1/2"	9 5/8"
NE4827RSV	8 1/2"	28"	8 1/2"	9 5/8"
NE6027RSV	8 1/2"	40"	8 1/2"	9 5/8"
NE7227RSV	8 1/2"	52"	8 1/2"	9 5/8"

	"M"	"N"
NR3647RSV	15 3/8"	25 1/4"
NR4847RSV	21 3/8"	25 1/4"
NR6047RSV	27 3/8"	25 1/4"
NR7247RSV	33 3/8"	25 1/4"

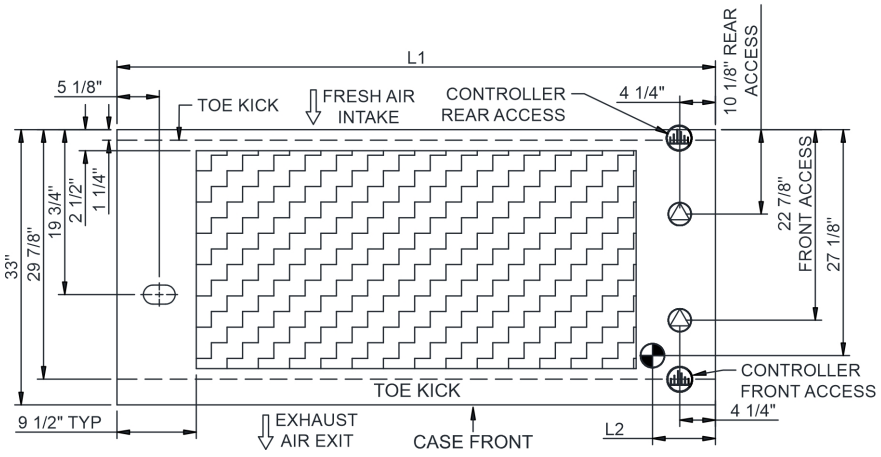

NOTE: ALL DIMENSIONS APPROXIMATE

- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
- LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).
- REFRIGERATION LINE CONNECTION.
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.
- SELF-CONTAINED CASE SERVICE ACCESS AREA.
- DRY CASE SERVICE ACCESS AREA.