

Technical Information

Allure - FR Straight Open Upright Case

Structural Concepts®

DELIVERING FRESH. ALWAYS.™

| DIMENSIONS / SHIPPING | | | | |
|-----------------------|--------|--------|-------|--------------|
| Model | L" | L1" | L2" | Est Wt (lbs) |
| FR6 | 71.750 | 74.000 | 8.000 | N/A |
| FR8 | 90.750 | 93.000 | 8.000 | N/A |

| ELECTRICAL | | | | | | | | | | | | | | | |
|------------|----------------------|------------|---------|----|-----|-----------------|--------------|--------------|-------|-------|----------------|-------------|-----------|------------------|-----------------------|
| Model | System Circuit Volts | | | Ph | Frq | Rated Load Amps | Min Cir Amps | Max OCP Amps | Watts | Wires | NEMA Plug | Amps Lights | Amps Fans | Amps Anti-Sweats | Amps Misc/Refrig/Heat |
| FR6 | Remote (DX) | Circuit #1 | 110-120 | 1 | 60 | 2.14 | 15 | 15 | 136 | 2+G | Leads Multiple | 0.70 | 0.90 | 0.54 | N/A |
| FR8 | Remote (DX) | Circuit #1 | 110-120 | 1 | 60 | 2.96 | 15 | 15 | 123 | 2+G | Leads Single | 1.40 | 1.20 | 0.36 | N/A |

| REFRIGERATION | | | | | | | | | | | | | |
|---------------|------|--------------|-----------|--------|----------------------|-----------------|-----------------|------------------------|------------------|-----------------------------|---------------------|-------------|------------------|
| Model | Zone | Section | System | Envt | REMOTE REFRIGERATION | | | | | GLYCOL / R744 REFRIGERATION | | | |
| | | | | | SST (°F) | Conv. Rack BTUH | Para. Rack BTUH | Defrost Interval (Hrs) | Defrost Duration | Total GPM | Pressure Drop (psi) | Concent (%) | Liquid Temp (°F) |
| FR6 | All | Refrigerator | Remote-DX | Type I | 26 | 10,368 | 9,600 | 4.00 | 30.00 | N/A | N/A | N/A | N/A |
| FR8 | All | Refrigerator | Remote-DX | Type I | 26 | 14,170 | 13,120 | 3.00 | 25.00 | N/A | N/A | N/A | N/A |

| INTENDED ENVIRONMENT | | |
|--|-----------|-----------------|
| Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise under Envt above. | | |
| WARMEST AVERAGE PRODUCT TEMP & INTENDED USE OF ZONES | | |
| Zone | Temp (°F) | Intended Use |
| 1 | 40 | Floral products |

| IMPORTANT NOTES |
|---|
| 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle. |
| 2) Top electrical access. |
| 3) Keep unit at least 15' from exterior doors, 10' from overhead HVAC vents, 5' from exterior windows. |
| 4) Units must be shimmed during installation to ensure the unit is level and plumb. |
| 5) Performance issues (product temperatures, water on floor, etc) caused by adverse conditions are not covered by warranty. |

| REGULATORY | |
|------------|---|
| All Models | Accordance with AHRI Std 1200 ETL Listed to UL 471 ETL Listed to CAN/CSA 22.2 No. 120 ETL Sanitation to NSF/ANSI 7 |



In Accordance with
AHRI Std 1200



Technical Information

Allure - FR Straight Open Upright Case

Structural Concepts®

DELIVERING FRESH. ALWAYS.™

NOTE: 8" CLEARANCE ABOVE TOP OF CASE NEEDED FOR REMOTE ACCESS

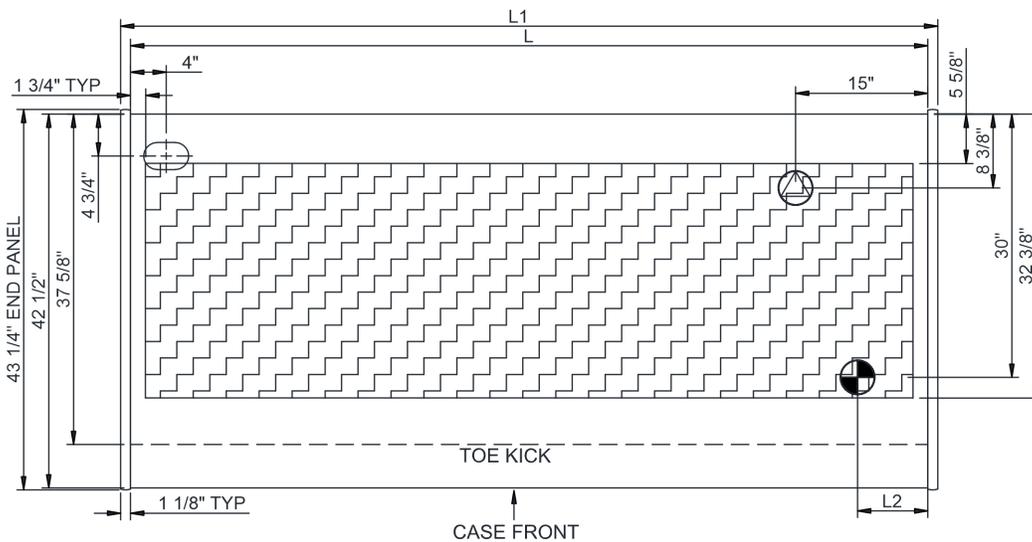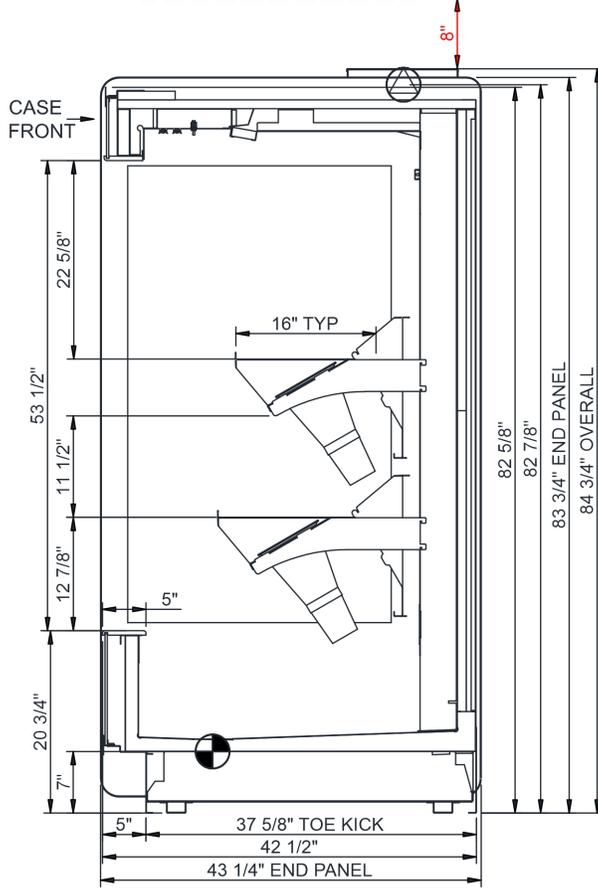

NOTE: ALL DIMENSIONS APPROXIMATE

-  ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
-  REFRIGERATION LINE CONNECTION.
-  SELF-CONTAINED CASE SERVICE ACCESS AREA.
-  LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).
-  REMOTE FLOOR SINK & UTILITIES ACCESS AREA.
-  DRY CASE SERVICE ACCESS AREA.