

Oasis

Refrigerated Self-Service Dual Sided Case Self-Contained

Structural Concepts®

DELIVERING FRESH. ALWAYS.™

- **FSC460R** 47"L x 50-3/8"D x 60-5/8"H
- **FSC660R** 75-3/8"L x 50-3/8"D x 60-5/8"H

Included


- Breeze self-contained refrigeration
- 6' Power cord
- Casters w/ levelers
- E-Coated evaporator coil
- LED 3500K top light(s)
- NOTE: Electrical specs reflect highest Amp draw using lighted shelves option
- One year parts & labor; 5 year compressor warranty
- Price tag molding (matches interior color)
- Removable deck pans provide complete access to evaporator coil & refrigeration connections




Specify	Standard Features	Additional Options
EXTERIOR COLOR	• Laminate (stock colors)	• Laminate (non-stock colors) • Stainless steel
INTERIOR COLOR	• Powder coated Silversan Black	• Stainless steel
LOWER FRONT PANEL COLOR	• Powder coated Silversan Black	• Stainless steel (must choose stainless exterior)
END PANELS	• Full w/stainless steel mirror interior	• Cutaway w/glass
VINYL GRAPHICS	• None	• Full wrap graphic set
SHELVING	• Non-adjustable metal shelves, non-lighted	• Non-adjustable metal shelves, lighted (LED 3500K)
ELECTRICAL CONNECTION	• 6' Straight blade power cord (self-cont.)	• 6' Locking power cord (self-cont.)
REFRIGERATION	• Breeze self-contained refrigeration	
MISCELLANEOUS		• (2) Roll-down security cover, locking (inc. ht. to 69-1/2") • Second year parts & labor warranty
ACCESSORIES		• (2) Night curtain, retractable, non-locking (inc. ht. to 69-1/2") • (2) Removable solid security cover, locking

Intended Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.		
Zone	Intended Product To Be Displayed	Warmest Avg Prod Temp ° F
1	Packaged refrigerated products	40

PLAN VIEW

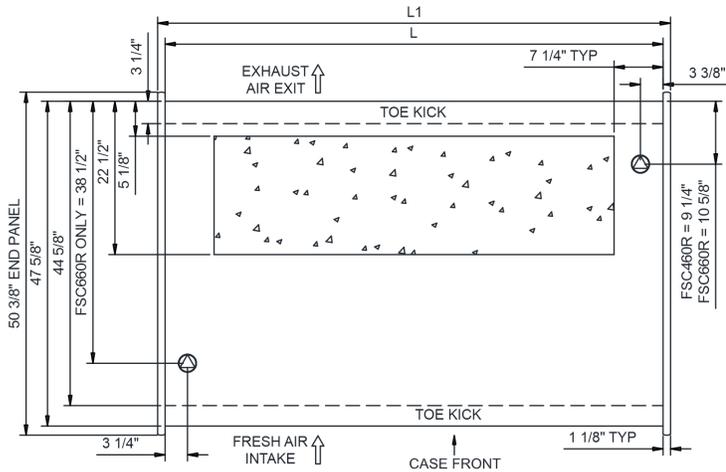

SIDE VIEW

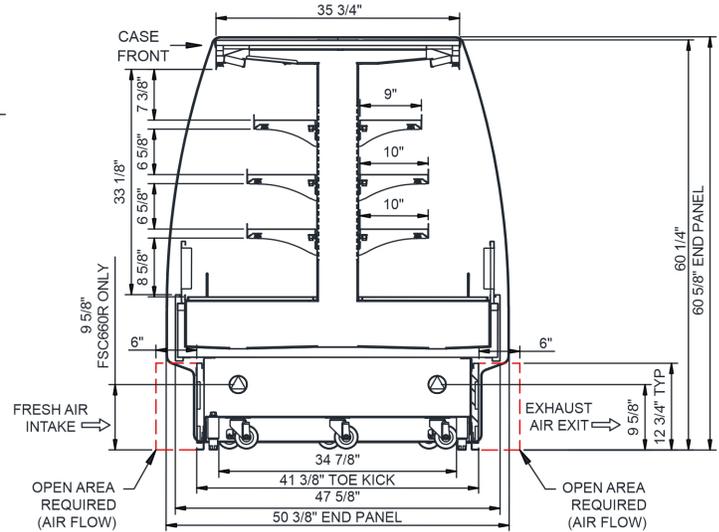

NOTE: ALL DIMENSIONS APPROXIMATE

- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
- LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

- REFRIGERATION LINE CONNECTION.
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

- SELF-CONTAINED CASE SERVICE ACCESS AREA.
- DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications																	
Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack BTUH	Para. Rack BTUH	Est Wt	
FSC460R	44.75	47.00	.00	Self-Contained (R290)			Circuit #1	208-240	1	50-60	15.19	2,868	2+G	6-20P or L6-20P	N/A	N/A	1,300
FSC660R	73.13	75.38	.00	Self-Contained (R290)			Circuit #1	208-240	1	50-60	24.00	4,867	2+G	6-30P or L6-30P	N/A	N/A	1,900

*** Does not include electric defrost on freezer models.

Regulatory Approvals:

All Models
 Accordance with AHRI Std 1200
 ETL Listed to UL 60335-2-89
 ETL Sanitation to NSF/ANSI 7



Important Notes:

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) Electrical specs reflect highest Amp draw using lighted shelves option .
- 3) Compressor air intake in one side & out other side. All louvered panels cannot be blocked.

⚠ WARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.