

# Fusion

GMDS 52"H Refrigerated Service Case Self-Contained

**Structural Concepts®**

DELIVERING FRESH. ALWAYS.™

- **GMDS4R** 51"L x 42-3/4"D x 51-5/8"H
- **GMDS5R** 62-7/8"L x 42-3/4"D x 51-5/8"H
- **GMDS6R** 75-3/8"L x 42-3/4"D x 51-5/8"H

## Included

- Breeze self-contained refrigeration
- Curved lift-up front glass
- LED top & shelf lights
- One year parts & labor; 5 year compressor warranty
- Stainless steel rear exterior
- Warmest average product temperature of 40°F or less



**GMDS4R**

Specify	Standard Features	Additional Options
<b>EXTERIOR COLOR</b>	• Laminate (stock colors)	• Laminate (non-stock colors) • Powder coated (stock/non-stock colors) • Powder coated Silversan Black • Stainless steel
<b>INTERIOR COLOR</b>	• Powder coated Silversan Black	• Stainless steel
<b>LOWER FRONT PANEL COLOR</b>	• Powder coated Silversan Black	• Powder coated (stock/non-stock colors) • Stainless steel
<b>BASE SUPPORT</b>	• Casters w/ levelers (self-cont.)	• 6"H legs (self-cont.)
<b>BUMPER FRONT</b>	• 1" Boston bumper (specify color)	• 1" Stainless steel plate rail bumper
<b>END PANELS</b>	• Full w/stainless steel mirror interior	• Cutaway w/glass • None (specify per line-up)
<b>FRONT GLASS</b>	• Curved	• Flat angled
<b>SCALE STAND</b>	• None	1. • Scale stand w/ receptacle & CAT5 (specify location) • Scale stand w/ receptacle (specify location)
<b>PRICE TAG MOLDING</b>	• None	• 1" Price tag molding (black or silver) • Universal price tag molding (clear w/ open top)
<b>REAR DOORS</b>	• Clear glass rear sliding doors	• Reflective glass rear sliding doors
<b>SHELVING</b>	• 16" Solid shelf	• 12" & 16" Solid shelving
<b>LIGHTS</b>	• LED 3500K w/ frosted lens	• LED 4000K w/ frosted lens • LED nose light
<b>ELECTRICAL CONNECTION</b>	• 6' Straight blade power cord (self-cont.)	• 6' Locking power cord (self-cont.)
<b>REFRIGERATION</b>	• Breeze self-contained refrigeration	
<b>HEAT TREATED CRATING</b>		• International heat treated crating
<b>MISCELLANEOUS</b>		• Front glass lock • Rear door lock
<b>ACCESSORIES</b>		• 2"H Full depth display risers (n/a w/shelf) • Angled display steps (n/a w/shelf) • Clean Sweep® coil cleaner (self-cont.) • Drain strainer • Rear wrapping board, white Sanalite®

**Option Notes:** 1 - Separate circuit required

# Fusion

GMDS 52"H Refrigerated Service Case Self-Contained


Structural Concepts®

DELIVERING FRESH. ALWAYS.™


**Intended Environment:** Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.

Zone	Intended Product To Be Displayed	Warmest Avg Prod Temp ° F
1	Unpackaged refrigerated products	40

PLAN VIEW

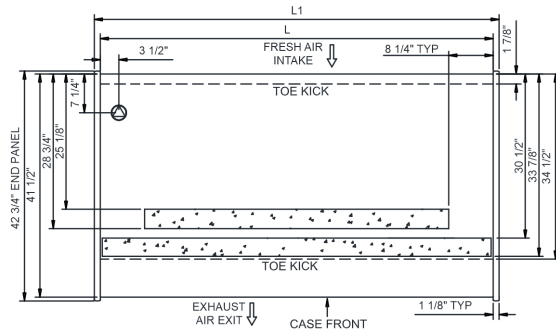

SIDE VIEW

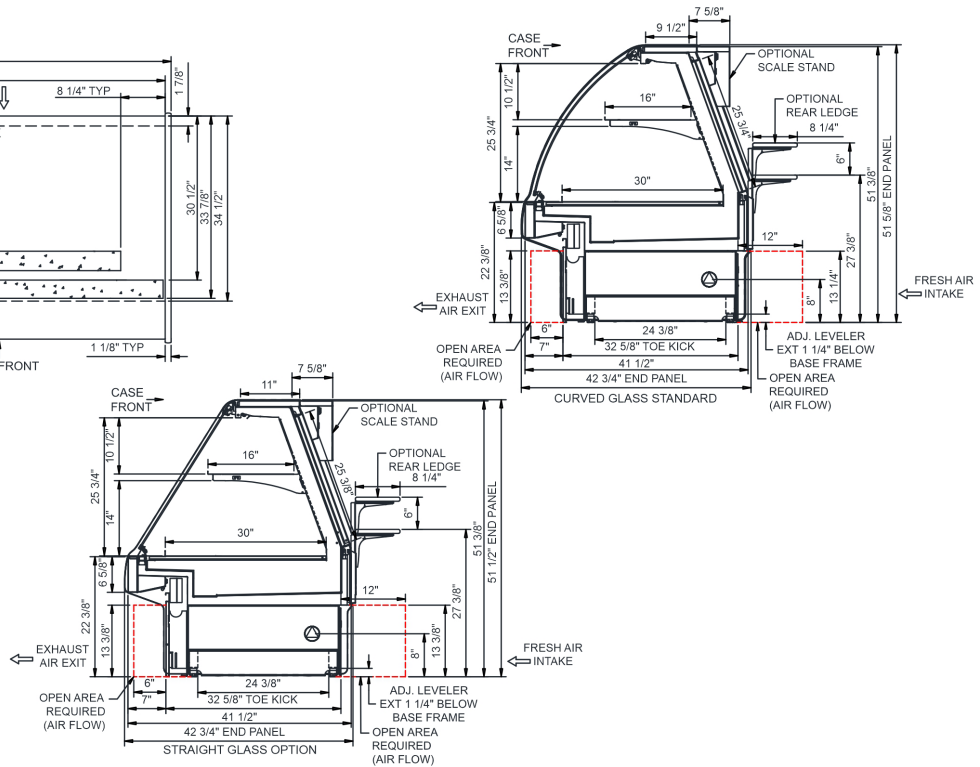

NOTE: ALL DIMENSIONS APPROXIMATE

- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6\"/>
- LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4\"/>

- REFRIGERATION LINE CONNECTION.
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

- SELF-CONTAINED CASE SERVICE ACCESS AREA.
- DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications

Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack BTU/H	Para. Rack BTU/H	Est Wt
GMDS4R	48.75	51.00	3.50	Self-Contained (R290)	Circuit #1	110-120	1	60	14.61	1,529	2+G	5-20P or L5-20P	N/A	N/A	N/A	950
GMDS5R	60.63	62.88	3.50	Self-Contained (R290)	Circuit #1	110-120	1	60	14.61	1,546	2+G	5-20P or L5-20P	N/A	N/A	N/A	1,000
GMDS6R	73.13	75.38	3.50	Self-Contained (R290)	Circuit #1	110-120	1	60	15.06	1,585	2+G	5-20P or L5-20P	N/A	N/A	N/A	1,300

\*\*\* Does not include electric defrost on freezer models.

## Regulatory Approvals:

All Models  
 Accordance with AHRI Std 1200  
 ETL Listed to UL 471  
 ETL Listed to CAN/CSA 22.2 No. 120  
 ETL Sanitation to NSF/ANSI 7



In Accordance with  
**AHRI Std 1200**

**DOE 2017**  
 Energy Efficiency  
 Compliant

## Important Notes:

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) 45" minimum door entry clearance required (without shipping skid).
- 3) Units must be shimmed during installation to ensure the unit is level and plumb.

**⚠ WARNING:** This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).