

# Technical Information

Oasis - Non-Refrigerated Self-Service Case 32"D

**DISCONTINUED**

**Structural Concepts®**

DELIVERING FRESH. ALWAYS.™

## DIMENSIONS / SHIPPING

Model	L"	L1"	L2"	Est Wt (lbs)
B3632D	N/A	36.625	0.000	N/A
B4732D	N/A	47.625	0.000	N/A
B5932D	N/A	59.625	0.000	N/A
B7132D	N/A	71.625	0.000	N/A

## ELECTRICAL

Model	System Circuit Volts			Ph	Frq	Rated Load Amps	Min Cir Amps	Max OCP Amps	Watts	Wires	NEMA Plug	Amps Lights	Amps Fans	Amps Anti-Sweats	Amps Misc/Refrig/Heat
B3632D	Ambient/Lights (N/A)	Circuit #1	110-120	1	60	0.81	15	15	85	2+G	5-15P or L5-15P	0.81	N/A	N/A	N/A
B4732D	Ambient/Lights (N/A)	Circuit #1	110-120	1	60	1.18	15	15	125	2+G	5-15P or L5-15P	1.18	N/A	N/A	N/A
B5932D	Ambient/Lights (N/A)	Circuit #1	110-120	1	60	1.52	15	15	160	2+G	5-15P or L5-15P	1.52	N/A	N/A	N/A
B7132D	Ambient/Lights (N/A)	Circuit #1	110-120	1	60	1.68	15	15	200	2+G	5-15P or L5-15P	1.68	N/A	N/A	N/A

## REFRIGERATION

Model	Zone	Section	System	Envt	REMOTE REFRIGERATION					GLYCOL / R744 REFRIGERATION			
					SST (°F)	Conv. Rack BTUH	Para. Rack BTUH	Defrost Interval (Hrs)	Defrost Duration	Total GPM	Pressure Drop (psi)	Concent (%)	Liquid Temp (°F)
B3632D	All	Ambient	Ambient/Lights-N/A	Type I	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
B4732D	All	Ambient	Ambient/Lights-N/A	Type I	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
B5932D	All	Ambient	Ambient/Lights-N/A	Type I	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
B7132D	All	Ambient	Ambient/Lights-N/A	Type I	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

## INTENDED ENVIRONMENT

Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise under Envt above.

## WARMEST AVERAGE PRODUCT TEMP & INTENDED USE OF ZONES

Zone	Temp (°F)	Intended Use
1	Ambient	Packaged non-refrigerated products

## IMPORTANT NOTES

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) Units are supplied with levelers which must be adjusted during installation to ensure the unit is level and plumb.

## REGULATORY




All Models	ETL Listed to UL 65 ETL Sanitation to NSF/ANSI 2
------------	---



# Technical Information

Oasis - Non-Refrigerated Self-Service Case 32"D


Structural Concepts®  
DELIVERING FRESH. ALWAYS.™

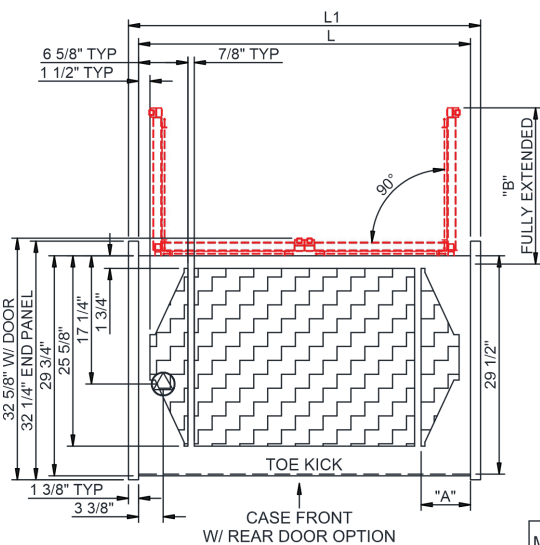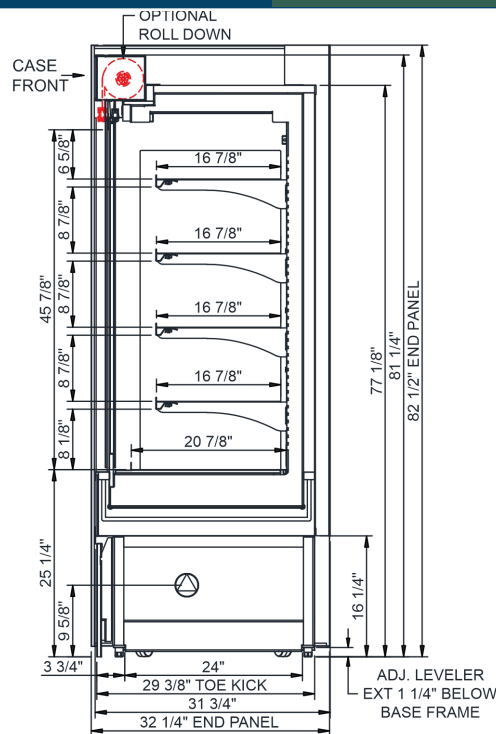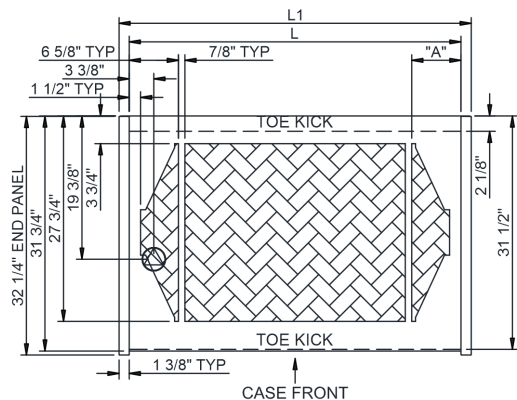

	"A"	"B"
B3632D	6 5/8"	32 1/8"
B4732D	6 5/8"	20"
B5932D	6 5/8"	21 3/4"
B7132D	14 1/8"	20"

MODEL	REAR DOOR OPENING WIDTH X HEIGHT
B3632D	22 7/8" X 42 1/4"
*B4732D	11 7/8" X 42 1/4" TYP
*B5932D	11 7/8" X 42 1/4" TYP
*B7132D	22 7/8" X 42 1/4" TYP

\* (2) REAR DOORS

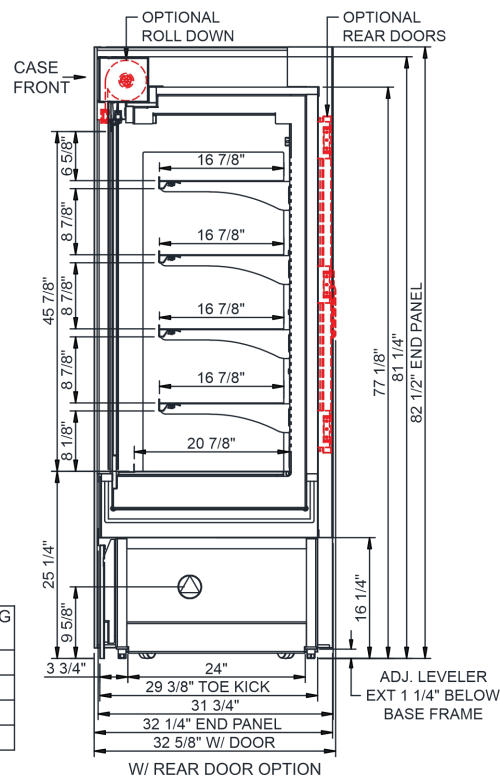

NOTE: ALL DIMENSIONS APPROXIMATE

⊗ ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).  
⊙ LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

⊕ REFRIGERATION LINE CONNECTION.  
⊞ REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

⊞ SELF-CONTAINED CASE SERVICE ACCESS AREA.  
⊞ DRY CASE SERVICE ACCESS AREA.