

Technical Information

Reveal® - Refrigerated Self-Service Slide In Counter Case

DISCONTINUED

Structural Concepts®

DELIVERING FRESH. ALWAYS.™

DIMENSIONS / SHIPPING				
Model	L"	L1"	L2"	Est Wt (lbs)
NE6013RSSV	N/A	59.750	4.125	N/A
NE7213RSSV	N/A	71.750	4.125	N/A

ELECTRICAL															
Model	System Circuit Volts			Ph	Frq	Rated Load Amps	Min Cir Amps	Max OCP Amps	Watts	Wires	NEMA Plug	Amps Lights	Amps Fans	Amps Anti-Sweats	Amps Misc/Refrig/Heat
NE6013RSSV	Remote (DX)	Circuit #1	110-120	1	60	1.60	15	15	71	2+G	Leads Single	0.70	0.60	0.22	0.08
	Remote (DX)	Circuit #1	110-120	1	60	1.60	15	15	71	2+G	Leads Single	0.70	0.60	0.22	0.08
	Self-Contained (R513A)	Circuit #1	110-120	1	60	16.00	20	20	1,204	2+G	5-20P or L5-20P	0.70	1.20	4.18	11.00
NE7213RSSV	Remote (DX)	Circuit #1	110-120	1	60	1.64	15	15	79	2+G	Leads Single	0.70	0.60	0.26	0.08
	Remote (DX)	Circuit #1	110-120	1	60	1.64	15	15	79	2+G	Leads Single	0.70	0.60	0.26	0.08
	Self-Contained (R513A)	Circuit #1	110-120	1	60	16.00	20	20	1,211	2+G	5-20P or L5-20P	0.70	1.20	4.22	11.00

REFRIGERATION													
Model	Zone	Section	System	Envt	REMOTE REFRIGERATION					GLYCOL / R744 REFRIGERATION			
					SST (°F)	Conv. Rack BTUH	Para. Rack BTUH	Defrost Interval (Hrs)	Defrost Duration	Total GPM	Pressure Drop (psi)	Concent (%)	Liquid Temp (°F)
NE6013RSSV	All	Refrigerator	Remote-DX	Type II	20	1,966	1,820	4.00	25.00	N/A	N/A	N/A	N/A
	All	Main	Self-Contained-R513A	Type II	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	All	Refrigerator	Remote-DX	Type I	20	1,642	1,520	4.00	25.00	N/A	N/A	N/A	N/A
NE7213RSSV	All	Refrigerator	Remote-DX	Type II	20	2,354	2,180	4.00	25.00	N/A	N/A	N/A	N/A
	All	Main	Self-Contained-R513A	Type II	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	All	Refrigerator	Remote-DX	Type I	20	1,966	1,820	4.00	25.00	N/A	N/A	N/A	N/A

INTENDED ENVIRONMENT		
Type II - Designed to operate in ambient conditions of 80°F and 55% relative humidity unless noted otherwise under Envt above.		
WARMEST AVERAGE PRODUCT TEMP & INTENDED USE OF ZONES		
Zone	Temp (°F)	Intended Use
1	40	Packaged refrigerated products

- IMPORTANT NOTES**
- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
 - 2) Back side of counter must be open or vented the full length of the unit to allow proper ventilation for the refrigeration system.
 - 3) A vent in the front of the counter recommended to help dissipate compressor heat.
 - 4) Rear Access Standard - Counter must be configured to allow air to be drawn in the rear and discharged out the front.
 - 5) Front Access Option - Counter must be configured to allow air to be drawn in the front and discharged out the rear.
 - 6) Unit can intake and discharge from rear with optional rear vented panel.
 - 7) 19.25" minimum space required beneath counter surface.
 - 8) Glass warranty only applicable to first point of delivery.

REGULATORY	
All Models	Accordance with AHRI Std 1200 ETL Listed to UL 471 ETL Listed to CAN/CSA 22.2 No. 120 ETL Sanitation to NSF/ANSI 7




In Accordance with
AHRI Std 1200

Technical Information

Reveal® - Refrigerated Self-Service Slide In Counter Case


Structural Concepts®

DELIVERING FRESH. ALWAYS.™

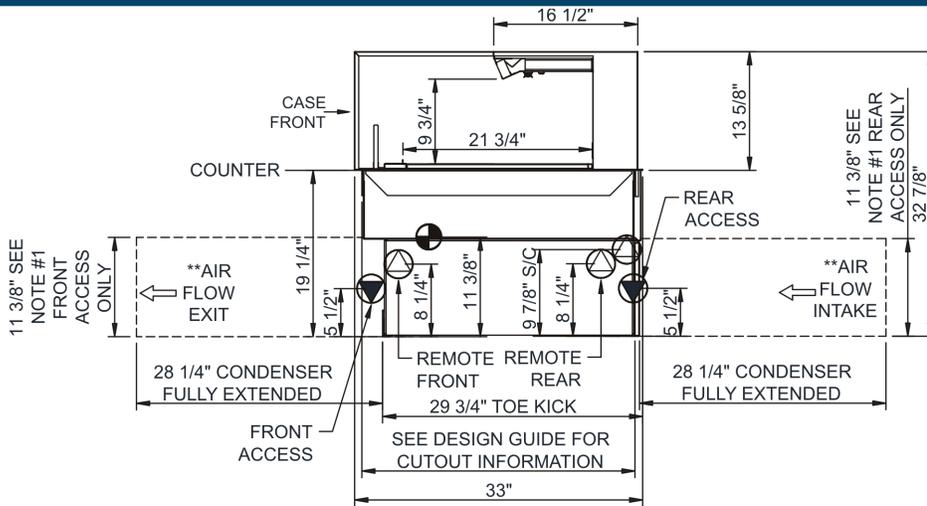


NOTES:

- 11 3/8" TALL, FULL WIDTH OF CASE OPENING IN CABINET OR COUNTER IS REQUIRED TO PULL OUT REFRIGERATION SYSTEM.
- BACK OF COUNTER / CABINET MUST BE VENTED PROPERLY FOR ADEQUATE AIRFLOW TO CONDENSER.
- **REPRESENTS REAR PULLOUT REFRIGERATION. AIR FLOW INTAKE AND EXIT DETAILS ARE REVERSED WITH FRONT PULLOUT REFRIGERATION OPTION.
- SELF-CONTAINED ACCESS ONLY BY PULLING OUT CONDENSER UNIT.
- SEE "COUNTER INSTALLATION GUIDE" FOR AIR FLOW REQUIREMENTS.

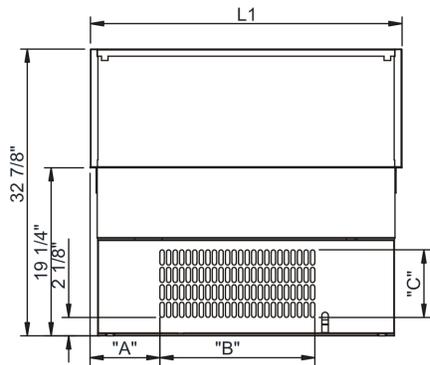

REAR VIEW

	"A"	"B"	"C"
NE3613RSSV	8"	17 3/4"	7 3/4"
NE4813RSSV	14"	17 3/4"	7 3/4"
NE6013RSSV	26"	17 3/4"	7 3/4"
NE7213RSSV	26"	17 3/4"	7 3/4"

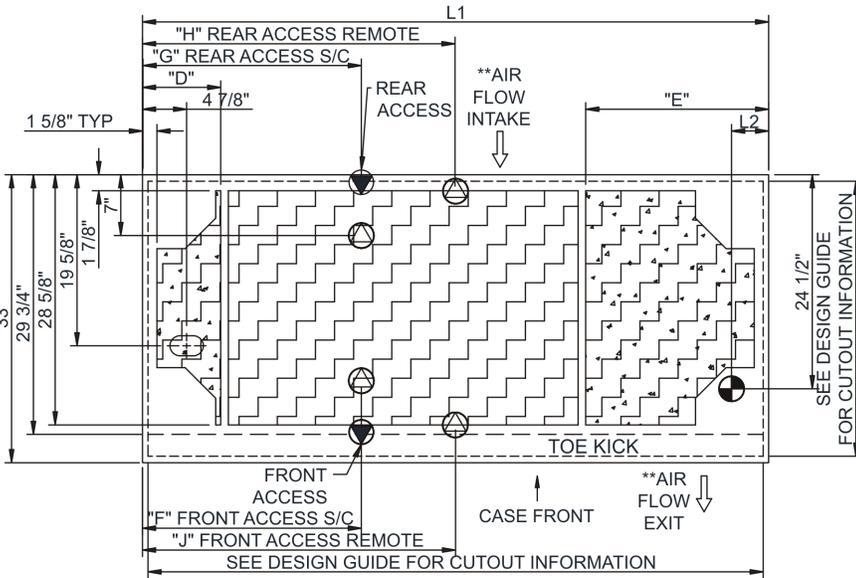

	"D"	"E"	"F"	"G"	"H"	"J"
NE3613RSSV	N/A	N/A	7"	7"	17 7/8"	17 7/8"
NE4813RSSV	9"	9"	12 3/4"	12 3/4"	23 7/8"	23 7/8"
NE6013RSSV	9"	9"	12 3/4"	24 3/4"	29 7/8"	29 7/8"
NE7213RSSV	9"	21"	25 1/8"	25 1/8"	35 7/8"	35 7/8"

NOTE: ALL DIMENSIONS APPROXIMATE

- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
- REFRIGERATION LINE CONNECTION.
- SELF-CONTAINED CASE SERVICE ACCESS AREA.
- LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.
- DRY CASE SERVICE ACCESS AREA.