

Technical Information

Reveal® - Refrigerated Service Slide In Counter Case

DISCONTINUED

Structural Concepts®

DELIVERING FRESH. ALWAYS.™

DIMENSIONS / SHIPPING				
Model	L"	L1"	L2"	Est Wt (lbs)
NE6013RSV	N/A	59.750	4.125	N/A
NE7213RSV	N/A	71.750	4.125	N/A

ELECTRICAL															
Model	System Circuit Volts			Ph	Frq	Rated Load Amps	Min Cir Amps	Max OCP Amps	Watts	Wires	NEMA Plug	Amps Lights	Amps Fans	Amps Anti-Sweats	Amps Misc/Refrig/Heat
NE6013RSV	Remote (DX)	Circuit #1	110-120	1	60	1.38	15	15	45	2+G	Leads Single	0.70	0.60		0.08
	Remote (DX)	Circuit #1	110-120	1	60	1.38	15	15	45	2+G	Leads Single	0.70	0.60		0.08
	Self-Contained (R513A)	Circuit #1	110-120	1	60	10.06	15	15	775	2+G	5-15P or L5-15P	0.70	1.20	3.96	4.20
NE7213RSV	Remote (DX)	Circuit #1	110-120	1	60	1.38	15	15	47	2+G	Leads Single	0.70	0.60		0.08
	Remote (DX)	Circuit #1	110-120	1	60	1.38	15	15	47	2+G	Leads Single	0.70	0.60		0.08
	Self-Contained (R513A)	Circuit #1	110-120	1	60	10.06	15	15	777	2+G	5-15P or L5-15P	0.70	1.20	3.96	4.20

REFRIGERATION													
Model	Zone	Section	System	Envt	REMOTE REFRIGERATION					GLYCOL / R744 REFRIGERATION			
					SST (°F)	Conv. Rack BTUH	Para. Rack BTUH	Defrost Interval (Hrs)	Defrost Duration	Total GPM	Pressure Drop (psi)	Concent (%)	Liquid Temp (°F)
NE6013RSV	All	Refrigerator	Remote-DX	Type II	20	1,145	1,060	4.00	25.00	N/A	N/A	N/A	N/A
	All	Main	Self-Contained-R513A	Type II	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	All	Refrigerator	Remote-DX	Type I	20	1,015	940	4.00	25.00	N/A	N/A	N/A	N/A
NE7213RSV	All	Refrigerator	Remote-DX	Type II	20	1,361	1,260	4.00	30.00	N/A	N/A	N/A	N/A
	All	Main	Self-Contained-R513A	Type II	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	All	Refrigerator	Remote-DX	Type I	20	1,210	1,120	4.00	30.00	N/A	N/A	N/A	N/A

INTENDED ENVIRONMENT		
Type II - Designed to operate in ambient conditions of 80°F and 55% relative humidity unless noted otherwise under Envt above.		
WARMEST AVERAGE PRODUCT TEMP & INTENDED USE OF ZONES		
Zone	Temp (°F)	Intended Use
1	40	Unpackaged refrigerated products

IMPORTANT NOTES
1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
2) Back side of counter must be open or vented the full length of the unit to allow proper ventilation for the refrigeration system.
3) A vent in the front of the counter recommended to help dissipate compressor heat.
4) Rear Access Standard - Counter must be configured to allow air to be drawn in the rear and discharged out the front.
5) Front Access Option - Counter must be configured to allow air to be drawn in the front and discharged out the rear.
6) Unit can intake and discharge from rear with optional rear vented panel.
7) 19.25" minimum space required beneath counter surface.
8) Glass warranty only applicable to first point of delivery.

REGULATORY	
All Models	Accordance with AHRI Std 1200 ETL Listed to UL 471 ETL Listed to CAN/CSA 22.2 No. 120 ETL Sanitation to NSF/ANSI 7




In Accordance with
AHRI Std 1200

Technical Information

Reveal® - Refrigerated Service Slide In Counter Case


Structural Concepts®

DELIVERING FRESH. ALWAYS.™

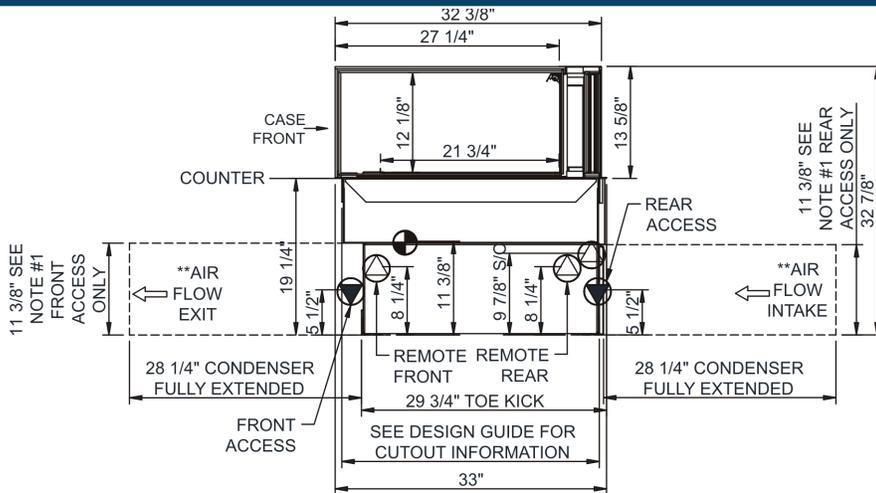


NOTES:

1. 11 3/8" TALL, FULL WIDTH OF CASE OPENING IN CABINET OR COUNTER IS REQUIRED TO PULL OUT REFRIGERATION SYSTEM.
2. SEE DESIGN GUIDE FOR CUTOUT SIZE IN CABINET FOR CASE TO DROP INTO.
3. BACK OF COUNTER / CABINET MUST BE VENTED PROPERLY FOR ADEQUATE AIRFLOW TO CONDENSER.
4. **REPRESENTS REAR PULLOUT REFRIGERATION. AIR FLOW INTAKE AND EXIT DETAILS ARE REVERSED WITH FRONT PULLOUT REFRIGERATION OPTION.
5. SELF-CONTAINED ACCESS ONLY BY PULLING OUT CONDENSER UNIT.
6. SEE "COUNTER INSTALLATION GUIDE" FOR AIR FLOW REQUIREMENTS.

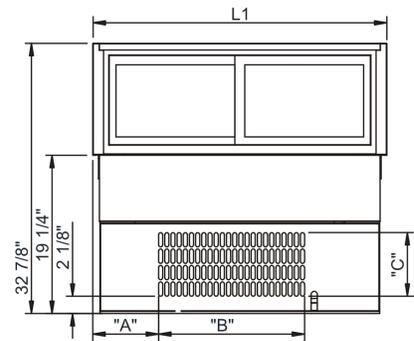

REAR VIEW

	"A"	"B"	"C"
NE3613RSV	8"	17 3/4"	7 3/4"
NE4813RSV	14"	17 3/4"	7 3/4"
NE6013RSV	26"	17 3/4"	7 3/4"
NE7213RSV	26"	17 3/4"	7 3/4"

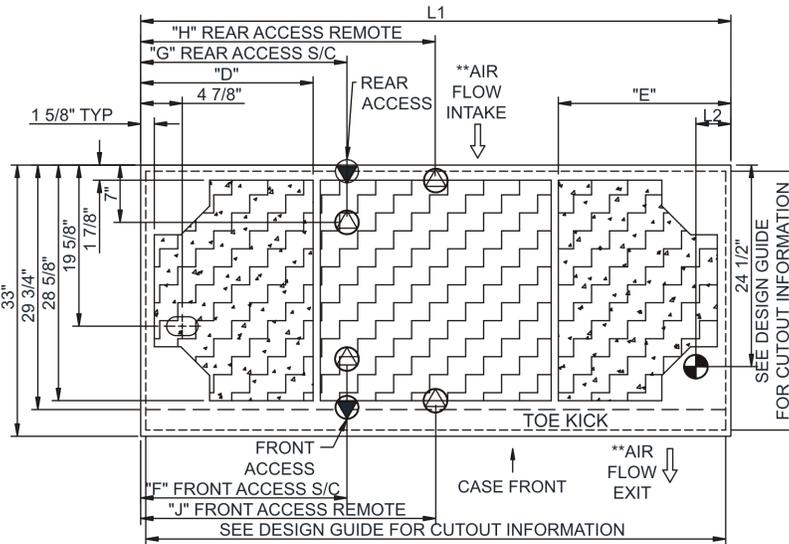

	"D"	"E"	"F"	"G"	"H"	"J"
NE3613RSV	N/A	N/A	7"	7"	17 7/8"	17 7/8"
NE4813RSV	9"	9"	12 3/4"	12 3/4"	23 7/8"	23 7/8"
NE6013RSV	9"	21"	12 3/4"	24 3/4"	29 7/8"	29 7/8"
NE7213RSV	21"	21"	25 1/8"	25 1/8"	35 7/8"	35 7/8"

NOTE: ALL DIMENSIONS APPROXIMATE

- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
- LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

- REFRIGERATION LINE CONNECTION.
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

- SELF-CONTAINED CASE SERVICE ACCESS AREA.
- DRY CASE SERVICE ACCESS AREA.