

- **NR3658RRSV** 35-3/4"L x 33"D x 57-1/2"H
- **NR4858RRSV** 47-3/4"L x 33"D x 57-1/2"H
- **NR6058RRSV** 59-3/4"L x 33"D x 57-1/2"H
- **NR7258RRSV** 71-3/4"L x 33"D x 57-1/2"H

### Included

- NOTE: Contact Factory for lead time
- NOTE: Glass warranty only applicable to first point of delivery
- Breeze~E (Type-II) self-contained refrigeration
- Blue Fin coated coil
- Clear glass shelf, lighted (LED 3500K) in upper display
- Condensate pan (self-contained refrig. only)
- Convertible baffle in upper display
- Fixed vertical glass
- Integrated average product temperature of 40°F or less
- One piece formed ABS plastic tub
- One year parts & labor; 5 year compressor warranty




**NR3658RRSV**

Specify	Standard Features	Additional Options
<b>FRAME EXTERIOR COLOR</b>	• Powder coated Silversan Black	• Powder coated (stock/non-stock colors) • Stainless steel
<b>INTERIOR COLOR</b>	• Powder coated Silversan Black	• NOTE: Interior color must be FDA & NSF approved • Powder coated (stock colors, specify RAL#) • Stainless steel
<b>LOWER FRONT PANEL COLOR</b>	• Powder coated Silversan Black	• Powder coated (stock colors, specify RAL#) • Stainless steel
<b>PANEL EXTERIOR</b>	• Laminate (stock colors)	• Laminate (non-stock colors) • Stainless steel
<b>BASE SUPPORT</b>	• Adjustable, locking casters (self-cont.)	• 6"H legs (self-cont.) • Shims (remote)
<b>LOWER REAR DOORS</b>	• Clear glass rear sliding doors	• Reflective glass rear sliding doors
<b>LOWER REAR PANEL</b>	• Powder coated Silversan Black	• Powder coated (stock colors, specify RAL#) • Stainless steel
<b>UPPER REAR DOORS</b>	• Clear glass rear sliding doors	• Reflective glass rear sliding doors
<b>LOWER DISPLAY</b>	• None	• 1"H Full depth display riser(s) for lower display • 2"H Full depth display riser(s) for lower display • 4"H Full depth display riser(s) for lower display • Clear glass shelf, lighted (LED)
<b>LIGHTS</b>	• LED 3500K w/ frosted lens	• LED 3000K w/ frosted lens • LED 4000K w/ frosted lens
<b>ELECTRICAL CONNECTION</b>	• 10' Straight blade power cord (self-cont.)	• 10' Locking power cord (self-cont.) • Electrical leads (remote)
<b>REFRIGERATION</b>	• Breeze~E (Type-II) self-contained refrigeration (rear access)	• Breeze~E (Type-II) self-contained refrigeration (front access) • NOTE: Remote only available w/base w/shims • Remote w/thermostat, solenoid & TXV (front access) • Remote w/thermostat, solenoid & TXV (rear access)
<b>MISCELLANEOUS</b>		• Lower rear door lock • Second year parts & labor warranty (excludes compressor) • Upper rear door lock
<b>ACCESSORIES</b>		• Clean Sweep® coil cleaner (self-cont.)


**Intended Environment:** Type II - Designed to operate in ambient conditions of 80°F and 55% relative humidity unless noted otherwise in system information below.

Zone	Intended Product To Be Displayed	Warmest Avg Prod Temp ° F
1	Packaged / unpackaged refrigerated products	40

### PLAN VIEW

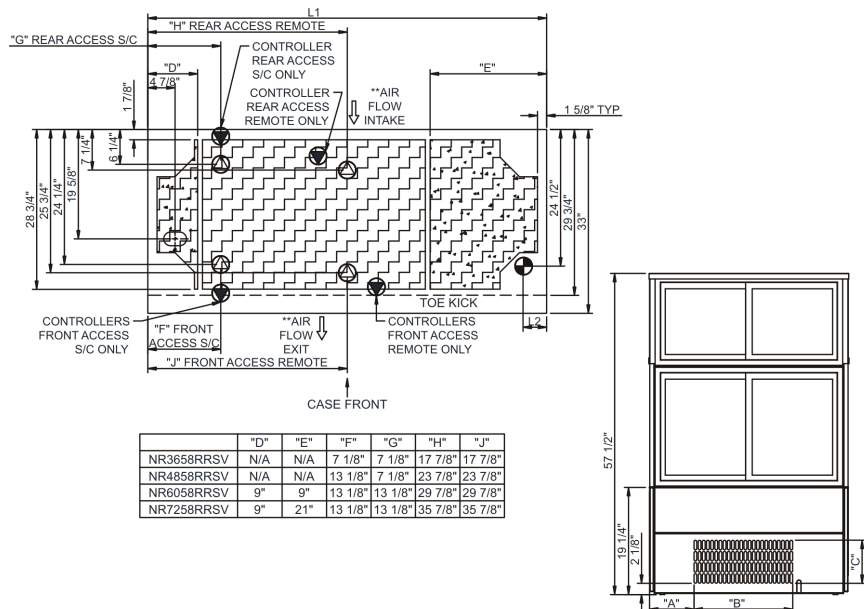

### SIDE VIEW

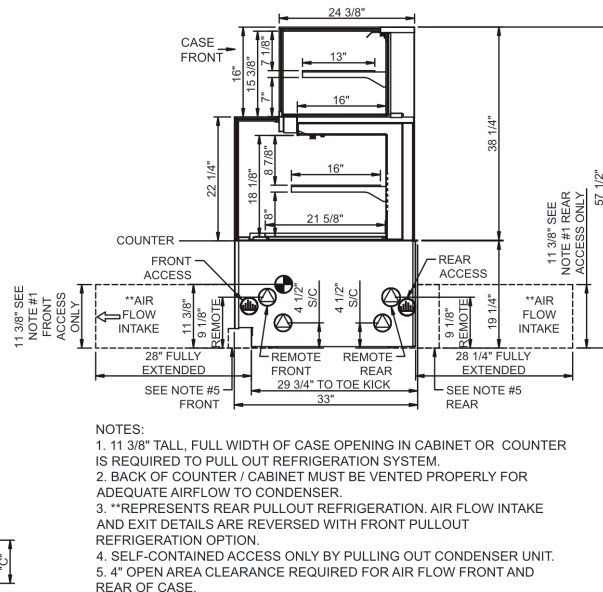

NOTE: ALL DIMENSIONS APPROXIMATE

- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
- LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

- REFRIGERATION LINE CONNECTION.
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

- SELF-CONTAINED CASE SERVICE ACCESS AREA.
- DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications																
Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack RTU/H	Para. Rack RTU/H	Est Wt
NR3658RRSV	N/A	35.75	4.13	Remote (DX)	Circuit #1	110-120	1	60	1.33	75	2+G	Leads Single	20.00	1274	1180	800
				Self-Contained (R513A)	Circuit #1	110-120	1	60	12.00	1,094	2+G	5-15P or L5-15P	N/A	N/A	N/A	
NR4858RRSV	N/A	47.75	4.13	Remote (DX)	Circuit #1	110-120	1	60	1.45	97	2+G	Leads Single	20.00	1663	1540	1,000
				Self-Contained (R513A)	Circuit #1	110-120	1	60	9.95	830	2+G	5-15P or L5-15P	N/A	N/A	N/A	
NR6058RRSV	N/A	59.75	4.13	Remote (DX)	Circuit #1	110-120	1	60	1.84	132	2+G	Leads Single	20.00	2052	1900	1,200
				Self-Contained (R513A)	Circuit #1	110-120	1	60	10.34	865	2+G	5-15P or L5-15P	N/A	N/A	N/A	
NR7258RRSV	N/A	71.75	4.13	Remote (DX)	Circuit #1	110-120	1	60	1.92	150	2+G	Leads Single	20.00	2441	2260	1,300
				Self-Contained (R513A)	Circuit #1	110-120	1	60	14.52	1,113	2+G	5-20P or L5-20P	N/A	N/A	N/A	

\*\*\* Does not include electric defrost on freezer models.

### Regulatory Approvals:

All Models  
 Accordance with AHRI Std 1200  
 ETL Listed to UL 471  
 ETL Listed to CAN/CSA 22.2 No. 120  
 ETL Sanitation to NSF/ANSI 7



In Accordance with  
**AHRI Std 1200**

**DOE 2017**  
 Energy Efficiency  
 Compliant

### Important Notes:

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle.
- 2) Glass warranty only applicable to first point of delivery.
- 3) Compressor air intake from rear and out front panel at toe kick. Front panel cannot be blocked.

**⚠ WARNING:** This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).