

Technical Information

Blend - Refrigerated Self-Service Center Case

Structural Concepts®

DELIVERING FRESH. ALWAYS.™

DIMENSIONS / SHIPPING				
Model	L"	L1"	L2"	Est Wt (lbs)
NM4855RSSV	N/A	47.750	4.13	950
NM6055RSSV	N/A	59.750	4.13	1,000
NM7255RSSV	N/A	71.750	6.75	1,100

ELECTRICAL																
Model	System Circuit Volts				Ph	Frq	Rated Load Amps	Min Cir Amps	Max OCP Amps	Watts	Wires	NEMA Plug	Amps Lights	Amps Fans	Amps Anti-Sweats	Amps Misc/Refrig/Heat
	Remote (DX)	Circuit #1	110-120	1												
NM4855RSSV	Remote (DX)	Circuit #1	110-120	1	60	1.56	15	15	80	2+G	Leads Single	1	1		0.08	
	Remote (DX)	Circuit #1	110-120	1	60	1.56	15	15	80	2+G	Leads Single	1	1		0.08	
	Self-Contained (R290)	Circuit #1	208-240	1	60	11.05	20	20	1,817	2+G	6-20P or L6-20P	1	N/A	4	6.50	
NM6055RSSV	Remote (DX)	Circuit #1	110-120	1	60	1.60	15	15	90	2+G	Leads Single	1	1		0.08	
	Remote (DX)	Circuit #1	110-120	1	60	1.60	15	15	90	2+G	Leads Single	1	1		0.08	
	Self-Contained (R290)	Circuit #1	208-240	1	60	16.00	20	20	2,805	2+G	6-20P or L6-20P	N/A	N/A	4	13.61	
NM7255RSSV	Remote (DX)	Circuit #1	110-120	1	60	1.64	15	15	102	2+G	Leads Single	1	1		0.08	
	Remote (DX)	Circuit #1	110-120	1	60	1.64	15	15	102	2+G	Leads Single	1	1		0.08	
	Self-Contained (R290)	Circuit #1	208-240	1	60	16.00	20	20	2,820	2+G	6-20P or L6-20P	1	N/A	4	13.00	

REFRIGERATION															
Model	Zone	Section	System	Envt	REMOTE REFRIGERATION					GLYCOL / R744 REFRIGERATION					
					SST (°F)	Conv. Rack BTUH	Para. Rack BTUH	Defrost Interval (Hrs)	Defrost Duration	Total GPM	Pressure Drop (psi)	Concent (%)	Liquid Temp (°F)		
NM4855RSSV	All	Refrigerator	Remote-DX	Type II	20	4,838	4,480	4.00	30.00	N/A	N/A	N/A	N/A		
	All	Refrigerator	Remote-DX	Type I	20	3,888	3,600	4.00	30.00	N/A	N/A	N/A	N/A		
	All	Main	Self-Contained-R290	Type II	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A		
NM6055RSSV	All	Refrigerator	Remote-DX	Type II	20	6,026	5,580	4.00	25.00	N/A	N/A	N/A	N/A		
	All	Refrigerator	Remote-DX	Type I	20	4,860	4,500	4.00	25.00	N/A	N/A	N/A	N/A		
	All	Main	Self-Contained-R290	Type II	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A		
NM7255RSSV	All	Refrigerator	Remote-DX	Type II	20	7,193	6,660	4.00	25.00	N/A	N/A	N/A	N/A		
	All	Refrigerator	Remote-DX	Type I	20	5,789	5,360	4.00	25.00	N/A	N/A	N/A	N/A		
	All	Refrigerator	Self-Contained-R290	Type II	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A		

INTENDED ENVIRONMENT		
Type II - Designed to operate in ambient conditions of 80°F and 55% relative humidity unless noted otherwise under Envt above.		
WARMEST AVERAGE PRODUCT TEMP & INTENDED USE OF ZONES		
Zone	Temp (°F)	Intended Use
1	40	Packaged refrigerated products-Prechilled to Warmest Avg Prod Temp.

IMPORTANT NOTES
1) REMOTE REFRIGERATION NOTE: Condensing unit not included, floor drain required.
2) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle.
3) Remove tool free front panel to fit through 36" door.
4) Back side of counter must be open or vented the full length of the unit to allow proper ventilation for the refrigeration system.
5) Glass warranty only applicable to first point of delivery.

REGULATORY	
All Models	Accordance with AHRI Std 1200 ETL Listed to UL 471 & UL 60335-2-89 ETL Listed to CAN/CSA 22.2 No. 120 ETL Sanitation to NSF/ANSI 7





In Accordance with
AHRI Std 1200

Technical Information

Blend - Refrigerated Self-Service Center Case

Structural Concepts®

DELIVERING FRESH. ALWAYS.™

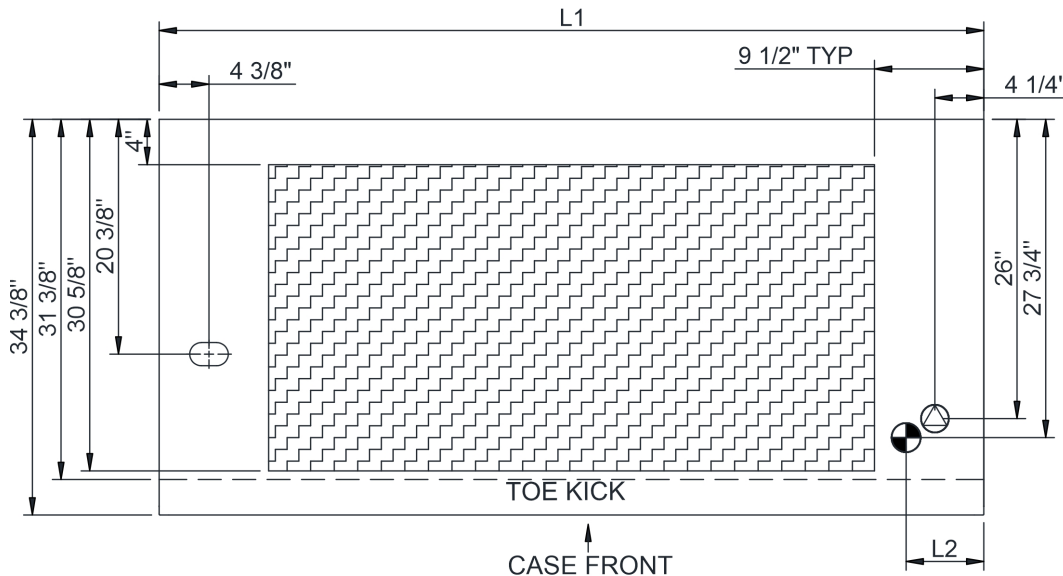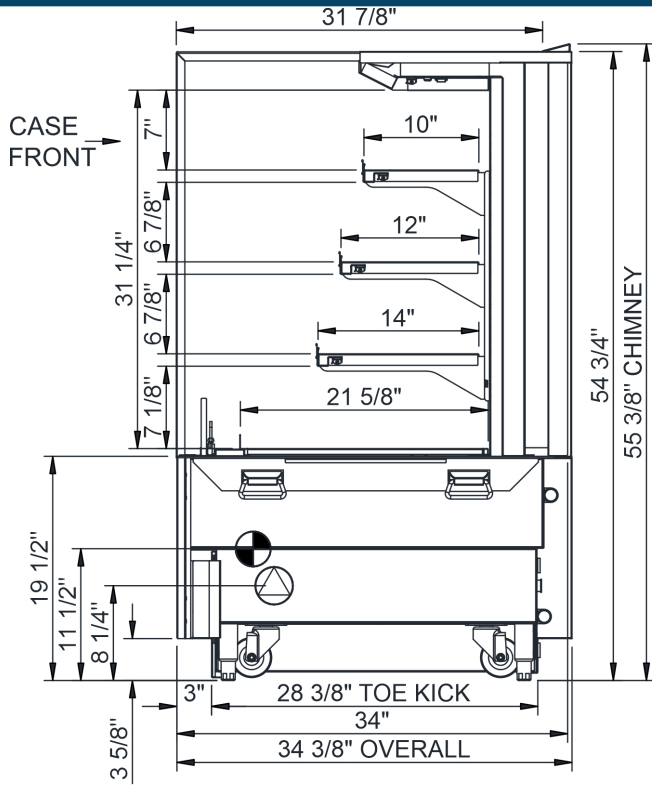

SELF-CONTAINED REFRIGERATION ACCESS ONLY BY PULLING OUT CONDENSER

COMPRESSOR AIR INTAKE FROM LOWER FRONT PANEL, OUT TOP REAR DISCHARGE VENT

NOTE: ALL DIMENSIONS APPROXIMATE

⊕ ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
 ⊖ LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

⊕ REFRIGERATION LINE CONNECTION.
 ⊖ REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

▨ SELF-CONTAINED CASE SERVICE ACCESS AREA.
 ⊞ DRY CASE SERVICE ACCESS AREA.