

End Caps - BOX Refrigerated Self-Service Case 24"D

Models

B3424
B4524
B6624
B8824



MODEL SHOWN W/ OPTIONAL REMOTE FEATURES & CUSTOM SIGNAGE

| Features | Standard | Options |
|----------------------------------|-----------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EXTERIOR COLOR | <input type="checkbox"/> Laminated (non-premium) Confirm pattern/grain direction | <input type="checkbox"/> Laminated (premium) Confirm pattern/grain direction <input type="checkbox"/> Stainless steel (includes lower front panel) |
| INTERIOR COLOR | <input type="checkbox"/> Black | <input type="checkbox"/> Stainless steel |
| LWR PERFORATED FRNT PANEL | <input type="checkbox"/> Painted - Black | <input type="checkbox"/> Stainless steel (w/stainless ext. only) |
| BASE | <input type="checkbox"/> Casters w/ levelers (n/a w/ remote ref.) | <input type="checkbox"/> Levelers (only) <input type="checkbox"/> Seismic levelers (Q4695) |
| END PANEL LEFT | <input type="checkbox"/> Full end panel w/mirror interior (metal edge matches interior color) | <input type="checkbox"/> Cutaway end panel (vinyl edge matches interior color) <input type="checkbox"/> No end panel w/ synchronized defrost |
| END PANEL RIGHT | <input type="checkbox"/> Full end panel w/mirror interior (metal edge matches interior color) | <input type="checkbox"/> Cutaway end panel (vinyl edge matches interior color) <input type="checkbox"/> No end panel w/ synchronized defrost |
| EXTERIOR BACK PANEL | <input type="checkbox"/> Solid back panel, black | <input type="checkbox"/> Rear loading hinged doors, locking (changes air discharge to lower rear) <input type="checkbox"/> Solid back panel, white |
| UPPER FRONT PANEL | <input type="checkbox"/> Flat front panel | <input type="checkbox"/> Black slatwall |
| SHELVING | <input type="checkbox"/> Metal shelves, non-lighted | <input type="checkbox"/> Metal shelves, lighted (LED 4000K) |
| ELECTRICAL CONNECT | <input type="checkbox"/> 6' Straight blade power cord (base exit) | <input type="checkbox"/> 6' Locking blade power cord (base exit) <input type="checkbox"/> 6' Locking blade power cord (top exit) <input type="checkbox"/> 6' Straight blade power cord (top exit) <input type="checkbox"/> Electrical leads (remote) |
| REFRIGERATION | <input type="checkbox"/> Breeze~E (Type-II) w/ EnergyWise s/c refrigeration | <input type="checkbox"/> Note: Remote doesn't incl Conds unit. Floor drain reqd. <input type="checkbox"/> Remote w/thermostat, solenoid & TXV |
| MISCELLANEOUS | | <input type="checkbox"/> Second year parts & labor warranty (excludes compressor) |
| ACCESSORIES | | <input type="checkbox"/> Clean Sweep® coil cleaner (n/a w/remote) <input type="checkbox"/> Night curtain, retractable, non-locking <input type="checkbox"/> Price tag molding (matches interior color) <input type="checkbox"/> Removable solid security cover, locking |

Option Notes: 1 - B3424 - Specify service LH or RH hinge
2 - See tech spec for load reqmts


Applications

- Refrigerated self-service grab & go merchandiser for packaged products.
- Built-in or In-line use.

End Caps BOX Refrigerated Self-Service Case 24"D

STANDARD

| Model | L x D x H (Lengths include end panels) |
|-------|-------------------------------------------|
| B3424 | 34-1/2"L x 24-1/4"D x 82-3/8"H |
| B4524 | 45-1/2"L x 24-1/4"D x 82-3/8"H |
| B6624 | 66-3/8"L x 24-1/4"D x 82-3/8"H |
| B8824 | 88-3/8"L x 24-1/4"D x 82-3/8"H |

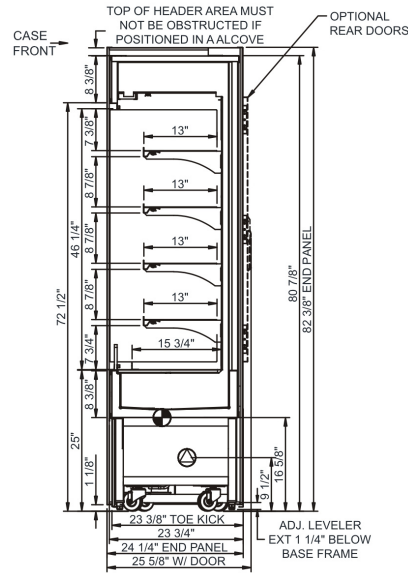

IMPORTANT NOTES:

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) Performance issues (product temperatures, water on floor, etc.) caused by adverse conditions are not covered by warranty.
- 3) Keep unit at least 15' from exterior doors, overhead HVAC vents, or any air curtain disruption.
- 4) End panels must be tightly joined or kept at least 6" away from any structure to prevent condensation.
- 5) Do not expose unit to direct sunlight or any heat source (ovens, fryers, etc.).
- 6) Tile floors, low ceilings, or small rooms will increase noise level.

WARNING

This product can expose you to chemicals including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.sco.ca.gov and search for Proposition 65. **DESIGNED TO OPERATE IN AMBIENT CONDITIONS OF 90°F AND 60% RELATIVE HUMIDITY.**

WARMEST AVG PRODUCT TEMP

| Zone | Temp (°F) |
|------|-----------|
| 1 | 40 |

INTENDED USE OF DISPLAY AREAS

| Zone | Intended Use |
|------|--------------------------------|
| 1 | Packaged refrigerated products |

For more information on any of our products or services please visit us on the web at:

www.structuralconcepts.com