

End Caps - BOX Heated Self-Service Case 32"D

Models

B2432H
B2432H-4
B3632H
B3632H-4




Features	Standard	Options
EXTERIOR COLOR	<input type="checkbox"/> Laminated (non-premium) Confirm pattern/grain direction	<input type="checkbox"/> Laminated (premium) Confirm pattern/grain direction <input type="checkbox"/> Stainless steel (includes lower front panel)
INTERIOR COLOR	<input type="checkbox"/> Stainless steel	
LOWER FRONT PANEL COLOR	<input type="checkbox"/> Painted - Black	<input type="checkbox"/> Stainless steel (w/stainless ext. only)
REAR EXTERIOR	<input type="checkbox"/> Solid back panel, black	
BASE	<input type="checkbox"/> Casters (non-locking) w/ levelers	
END PANEL LEFT	<input type="checkbox"/> Full end panel w/mirror interior (metal edging)	<input type="checkbox"/> Cutaway end panel w/metal edging
END PANEL RIGHT	<input type="checkbox"/> Full end panel w/mirror interior (metal edging)	<input type="checkbox"/> Cutaway end panel w/metal edging
SHELVING	<input type="checkbox"/> Solid heated shelves (3), lighted	<input type="checkbox"/> Additional solid heated shelf, lighted (Refer to the -4 suffix model for electrical specifications)
LIGHTS	<input type="checkbox"/> Incandescent lights	<input type="checkbox"/> Ceramic Metal Halide high efficiency lighting
ELECTRICAL CONNECT	<input type="checkbox"/> Electrical leads	<input type="checkbox"/> 6' Power cord

Applications

- Heated self-service grab & go merchandiser for packaged products.
- Built-in or In-line use.

End Caps BOX Heated Self-Service Case 32"D

Model	L x D x H (Lengths include end panels)
B2432H	24-3/4"L x 32-1/4"D x 82-1/2"H
B2432H-4	24-3/4"L x 32-1/4"D x 82-1/2"H
B3632H	36-3/4"L x 32-1/4"D x 82-1/2"H
B3632H-4	36-3/4"L x 32-1/4"D x 82-1/2"H

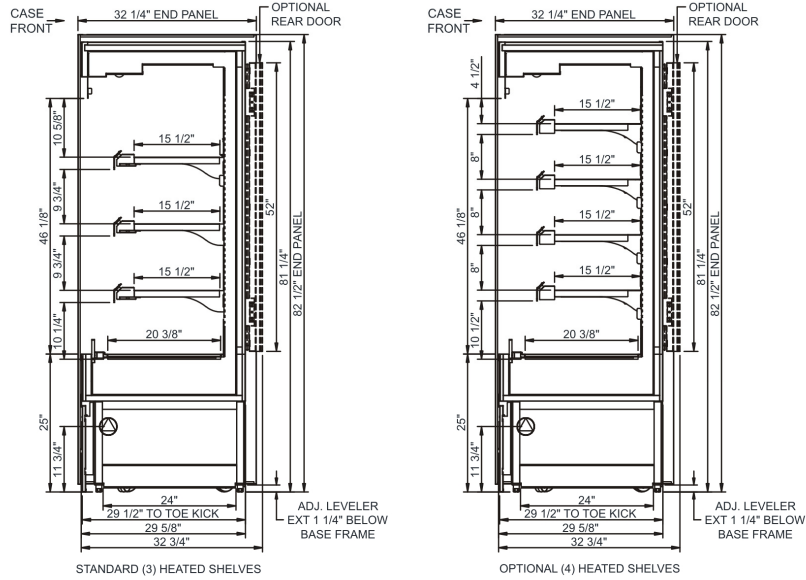

IMPORTANT NOTES:

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) Performance issues (product temperatures, water on floor, etc.) caused by adverse conditions are not covered by warranty.
- 3) Keep unit at least 15' from exterior doors, overhead HVAC vents, or any air curtain disruption.
- 4) Do not expose unit to direct sunlight or any heat source (ovens, fryers, etc.).

WARNING

This product can expose you to chemicals including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

INTENDED ENVIRONMENT

Designed to operate in ambient conditions of 75°F with 55% relative humidity.

WARMEST AVG PRODUCT TEMP

Zone	Temp (°F)
1	160

INTENDED USE OF DISPLAY AREAS

Zone	Intended Use
1	Packaged heated product

For more information on any of our products or services please visit us on the web at:

www.structuralconcepts.com