

# End Caps - BOX Refrigerated Self-Service Case Top Mount Compressor

## Models

B424TM  
B824TM




Features	Standard	Options
<b>EXTERIOR COLOR</b>	<input type="checkbox"/> Laminated (non-premium) Confirm pattern/grain direction	<input type="checkbox"/> Laminated (premium) Confirm pattern/grain direction <input type="checkbox"/> Stainless steel
<b>INTERIOR COLOR</b>	<input type="checkbox"/> Black	<input type="checkbox"/> Stainless steel
<b>LOWER FRONT PANEL COLOR</b>	<input type="checkbox"/> Painted - Black	<input type="checkbox"/> Stainless steel (w/stainless ext. only)
<b>REAR EXTERIOR</b>	<input type="checkbox"/> Solid back panel, black	
<b>BASE</b>	<input type="checkbox"/> Rail system for shims	
<b>END PANELS</b>	<input type="checkbox"/> Full end panels w/mirror interior	
<b>HEADER SIGN</b>	<input type="checkbox"/> None	<input type="checkbox"/> Backlit sign (custom printing) <input type="checkbox"/> Backlit sign (no printing)
<b>SHELVING</b>	<input type="checkbox"/> Metal shelves, 12"D, non-lighted	<input type="checkbox"/> Metal shelves, 12"D, lighted (LED)
<b>LIGHTS</b>	<input type="checkbox"/> LED top light	
<b>ELECTRICAL CONNECT</b>	<input type="checkbox"/> 6' Straight blade power cord (base exit)	<input type="checkbox"/> 6' Locking blade power cord (base exit) <input type="checkbox"/> Electrical leads (remote)
<b>REFRIGERATION</b>	<input type="checkbox"/> Remote DX refrigeration	<input type="checkbox"/> Breeze w/EnergyWise s/c refrigeration
<b>ACCESSORIES</b>		<input type="checkbox"/> Night curtain, retractable, non-locking <input type="checkbox"/> Removable solid security cover, locking

## Applications

- Refrigerated self-service grab & go merchandiser for packaged products.
- In-line use.

# End Caps BOX Refrigerated Self-Service Case Top Mount Compressor

Model	L x D x H (Lengths include end panels)
B424TM	47-1/8"L x 25"D x 81-7/8"H
B824TM	92-1/8"L x 25"D x 81-7/8"H

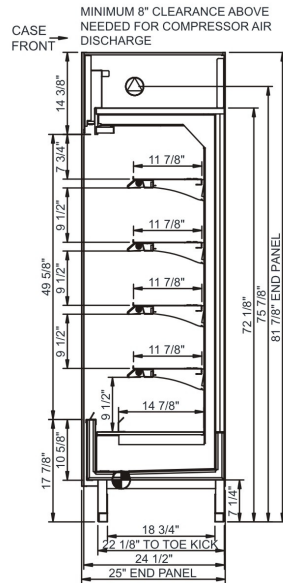

## IMPORTANT NOTES:

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used.
- 2) Top of unit must remain completely open.
- 3) Performance issues from adverse conditions not covered by warranty.
- 4) Keep unit at least 15' from air curtain disruptions.
- 5) End panels must be tightly joined or 6" from structures to prevent condensation.
- 6) Do not expose unit to direct sunlight or heat sources.
- 7) Tile floors, low ceilings, or small rooms will increase noise level.

## ⚠️ WARNING

This product can expose you to chemicals including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

## INTENDED ENVIRONMENT

Designed to operate in ambient conditions of 75°F with 55% relative humidity.

## WARMEST AVG PRODUCT TEMP

Zone	Temp (°F)
1	40

## INTENDED USE OF DISPLAY AREAS

Zone	Intended Use
1	Packaged refrigerated products

For more information on any of our products or services please visit us on the web at:

[www.structuralconcepts.com](http://www.structuralconcepts.com)