

Islands - FSIR Type II Refrigerated Multi-Shelf Island Case

Models

FSI663R
FSI863R



Conforms to NSF STD 7
TYPE II

Features	Standard	Options
EXTERIOR COLOR	<input type="checkbox"/> Powder coated	<input type="checkbox"/> Laminated (confirm pattern/grain direction) <input type="checkbox"/> Stainless steel
INTERIOR COLOR	<input type="checkbox"/> Black	<input type="checkbox"/> Stainless steel
LOWER PANEL COLOR	<input type="checkbox"/> Black	<input type="checkbox"/> Stainless steel
BASE	<input type="checkbox"/> Levelers	
BUMPER	<input type="checkbox"/> None	<input type="checkbox"/> 1" bumper on all sides, double strip (specify color)
SHELVING	<input type="checkbox"/> Non-adjustable solid shelves, non-lighted	<input type="checkbox"/> Non-adjustable solid shelves, lighted (LED)
LIGHTS	<input type="checkbox"/> LED top light(s)	
ELECTRICAL CONNECT	<input type="checkbox"/> Electrical leads (remote)	<input type="checkbox"/> 6' power cord
REFRIGERATION	<input type="checkbox"/> Remote DX refrigeration (NSF Type II conditions)	<input type="checkbox"/> Breeze~E (Type-II) w/ EnergyWise s/c refrigeration <input type="checkbox"/> Satellite condenser (remote refrigeration) with low ambient kit (See the technical information sheet for condenser specs)
MISCELLANEOUS	<input type="checkbox"/> Price tag molding	


Option Notes: 1 - For Model FSI863R Only

Applications

- Multi-shelf refrigerated self-service Island for packaged deli & beverage items

Islands FSIR Type II Refrigerated Multi-Shelf Island Case

Model	L x D x H (Lengths include end panels)
FSI663R	80-3/4"L x 48-1/8"D x 63"H
FSI863R	99-3/4"L x 48-1/8"D x 63"H

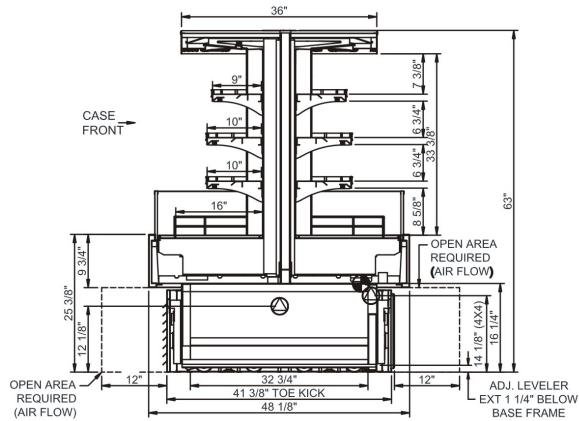

IMPORTANT NOTES:

1) Electrical specs reflect highest Amp draw using lighted shelves



WARNING:

This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the state of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

INTENDED ENVIRONMENT

Designed to operate in ambient conditions of 80°F and 60% relative humidity.

WARMEST AVG PRODUCT TEMP

Zone	Temp (°F)
1	40

INTENDED USE OF DISPLAY AREAS

Zone	Intended Use
1	Packaged refrigerated products