

Encore Series - HVB Non-Refrigerated Self-Service Pull-Out Drawer Case

DIMENSIONS / SHIPPING				
Model	L"	L1"	L2"	Est Wt (lbs)
HVB38SS	38.000	40.000	0.000	N/A
HVB56SS	56.000	58.000	0.000	N/A
HVB74SS	74.000	76.000	0.000	N/A

ELECTRICAL																
Model	System Circuit Volts				Ph	Frq	Rated Load Amps	Min Cir Amps	Max OCP Amps	Watts	Wires	NEMA Plug	Amps Lights	Amps Fans	Amps Anti-Sweats	Amps Misc/Refrig/Heat
HVB38SS	Ambient	Circuit #1	110-120	1	60	0.56	15	15	67	2+G	5-15P or L5-15P	0.56	N/A	N/A	N/A	
HVB56SS	Ambient	Circuit #1	110-120	1	60	0.74	15	15	96	2+G	5-15P or L5-15P	0.74	N/A	N/A	N/A	
HVB74SS	Ambient	Circuit #1	110-120	1	60	0.99	15	15	120	2+G	5-15P or L5-15P	0.99	N/A	N/A	N/A	

REFRIGERATION															
Model	Zone	Section	System	Envt	REMOTE REFRIGERATION					GLYCOL / R744 REFRIGERATION					
					SST (°F)	Conv. Rack BTUH	Para. Rack BTUH	Defrost Interval (Hrs)	Defrost Duration (Mins)	Total GPM	Pressure Drop (psi)	Concent (%)	Liquid Temp (°F)		
HVB38SS	All	Ambient	Ambient-N/A	Type I	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
HVB56SS	All	Ambient	Ambient-N/A	Type I	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
HVB74SS	All	Ambient	Ambient-N/A	Type I	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

INTENDED ENVIRONMENT		
Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise under Envt above.		
WARMEST AVERAGE PRODUCT TEMP & INTENDED USE OF ZONES		
Zone	Temp (°F)	Intended Use
1	Ambient	Unpackaged non-refrigerated products



IMPORTANT NOTES
1) 42" minimum door entry clearance required (without shipping skid).
2) Units are supplied with levelers which must be adjusted during installation to ensure the unit is level and plumb.
3) Dimensions reflect levelers extended 1-1/4".

REGULATORY	
All Models	ETL Listed to UL 65 ETL Sanitation to NSF 2



Encore Series - HVB Non-Refrigerated Self-Service Pull-Out Drawer Case

STANDARD

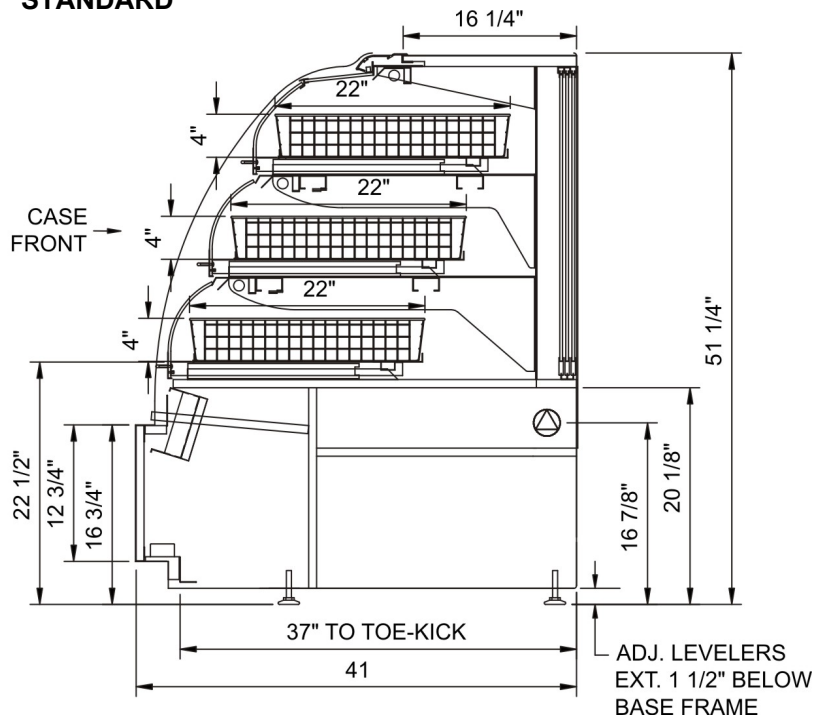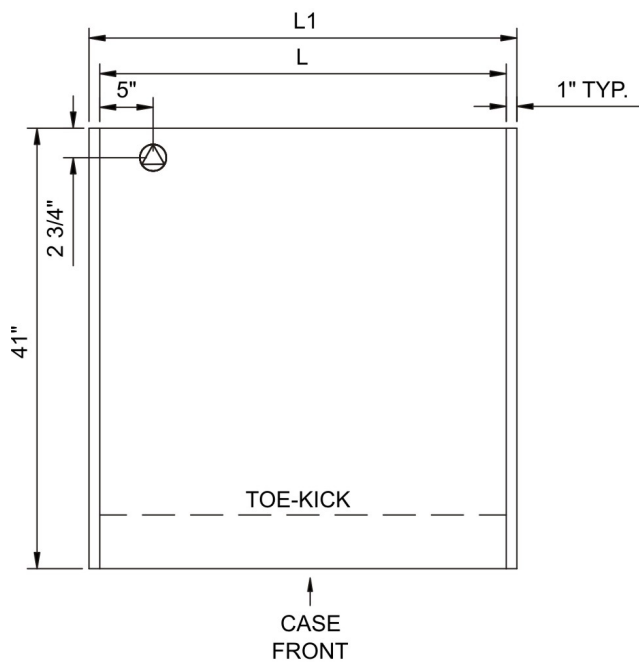

NOTE: ALL DIMENSIONS APPROXIMATE

- ⊗ ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
- ⊙ LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).
- ⊕ REFRIGERATION LINE CONNECTION.
- ⊞ REMOTE FLOOR SINK & UTILITIES ACCESS AREA.
- ▨ SELF-CONTAINED CASE SERVICE ACCESS AREA.
- ▩ DRY CASE SERVICE ACCESS AREA.