

Technical Information

Oasis - Refrigerated Self-Service Case With Tilting Deck

Structural Concepts®

DELIVERING FRESH. ALWAYS.™

DIMENSIONS / SHIPPING

Model	L"	L1"	L2"	Est Wt (lbs)
PD452R	48.000	50.250	0.000	N/A
PD852R	96.000	98.250	0.000	N/A

ELECTRICAL

Model	System	Circuit Volts	Circuit #1	Ph	Frq	Rated Load Amps	Min Cir Amps	Max OCP Amps	Watts	Wires	NEMA Plug	Amps Lights	Amps Fans	Amps Anti-Sweats	Amps Misc/Refrig/Heat
PD452R	Self-Contained (R290)-Type I Env			1	60	13.38	20	20	1,480	2+G	5-20P or L5-20P	N/A	0.22	4.14	9.02
PD852R	Self-Contained (R290)-Type I Env			1	60	14.57	20	20	2,630	2+G	6-20P or L6-20P	N/A	1.34	7.02	13.61

REFRIGERATION

Model	Zone	Section	System	Envt	REMOTE REFRIGERATION					GLYCOL / R744 REFRIGERATION			
					SST (°F)	Conv. Rack BTUH	Para. Rack BTUH	Defrost Interval (Hrs)	Defrost Duration	Total GPM	Pressure Drop (psi)	Concent (%)	Liquid Temp (°F)
PD452R	All	Main	Self-Contained-R290-Type I Env	Type I	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
PD852R	All	Main	Self-Contained-R290-Type I Env	Type I	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

INTENDED ENVIRONMENT

Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise under Envt above.

WARMEST AVERAGE PRODUCT TEMP & INTENDED USE OF ZONES

Zone	Temp (°F)	Intended Use
1	40	Packaged refrigerated products-Prechilled to Warmest Avg Prod Temp.

REGULATORY

All Models	Accordance with AHRI Std 1200 ETL Listed to UL 471 & UL 60335-2-89 ETL Listed to CAN/CSA 22.2 No. 120 ETL Sanitation to NSF/ANSI 7
------------	---

IMPORTANT NOTES



In Accordance with
AHRI Std 1200


Oasis - Refrigerated Self-Service Case With Tilting Deck

DELIVERING FRESH. ALWAYS.™



NOTE:

1. DISPLAY SHELVES 3 POSITIONS:
HORIZONTAL, 10° & 20°
2. DISPLAY DECK 2 POSITIONS:
HORIZONTAL & 10°

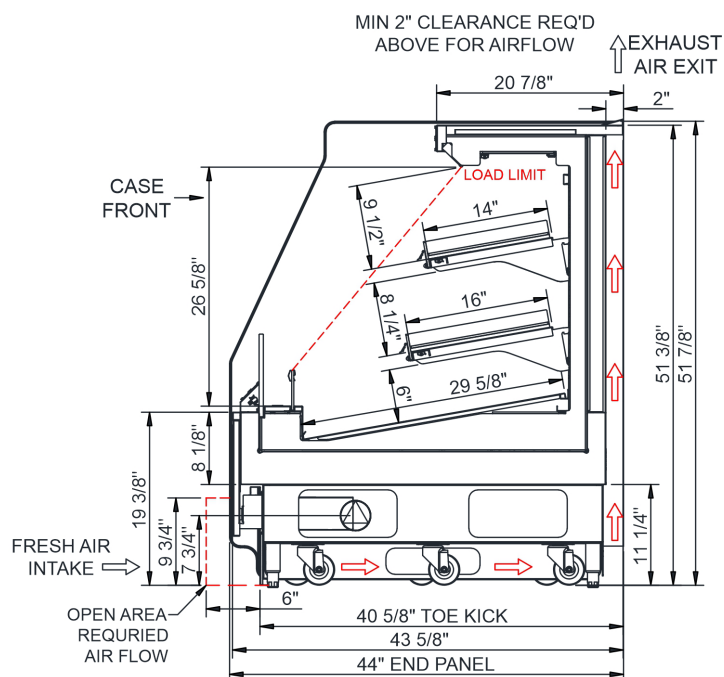

 ELECTRICAL JUNCTION BOX
(SUPPLIED WITH 6" LEADS OR POWER CORD).

 LOCATION OF DRAIN TUBE FOR REMOTE REF.
ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

 REFRIGERATION LINE CONNECTION.

 REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

 SELF-CONTAINED CASE SERVICE ACCESS AREA.

 DRY CASE SERVICE ACCESS AREA.